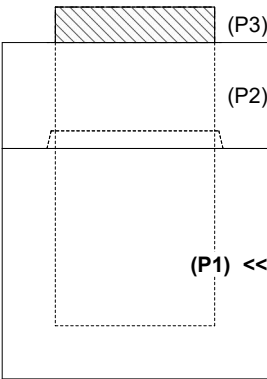

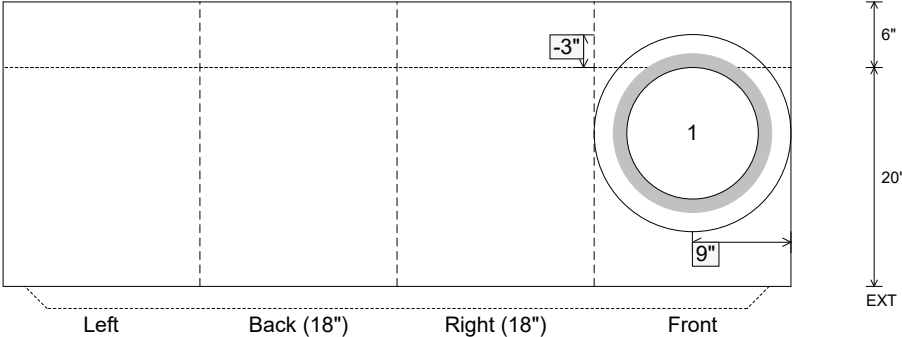


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/17/2026 5:40:50 PM		Tech: J. Horsley - A PC: J. Jarvis				
Structure ID: 47											
P1 BX18180606VF BOX BASE 6inW, 6inF, Variable Ht T/n											
P3) 18" x 18" - CASTING HEIGHT - 4" P2) 18" x 18" - BOX RISER 6inW F/G - 12" P1) 18" x 18" - BOX BASE 6inW, 6inF, Variable Ht T/n - 20" 2) 18" x 18" - Conseal CS-102 1.00" 1) Hole - 18"						0 lb 580 lb 1324 lb 0 lb 0 lb ----- 0 lb		Structure Notes: 1. PER MSD YARD DRAIN / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #4 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 165-A FRAME & GRATE SUPPLIED BY OTHERS			
Rim: 551.6' Rim to Invert: 3' Slack: 0" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	548.6'	0°	15"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions)  Invert: 1 Degree: 0° Horz: 9" Hole: 18" Up(_): -3" INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 6" Floor Height: 6"		Height (Int): 20" Height (Ext): 26"		Weight (Net): 1324 lb Volume (Net): 0.34cu.yd		