

Structure ID: 81

P2 BX2430-08R36

BOX RISER 8inW F/G

- P4) 15" x 27" - P.I.P. - BY OTHERS - 8"
- P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8"
- P2) 24" x 30" - BOX RISER 8inW F/G - 36"
- P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht T/n - 44"
- 2) 24" x 30" - Conseal CS-102 1.00"
- 1) 15" x 27" - Conseal CS-102 1.00"
- 3) Hole - 20
- 1) Hole - 18
- 2) Hole - 4



0 lb
 963 lb
 3366 lb
 4540 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 Structure Total: 8870 lb

- Structure Notes:
 KYTC STATE PROJECT
1. PER KYTC DBI TYPE 13G / ASTM C-913 SPECS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 4. NO STEPS
 5. HOE KY-230G FRAME & GRATE SUPPLIED BY OTHERS


Rim: 551.24' Rim to Invert: 8' Slack: 0" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5	549.24'	90°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	26"	0"
Invert 6	549.24'	270°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	26"	0"
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

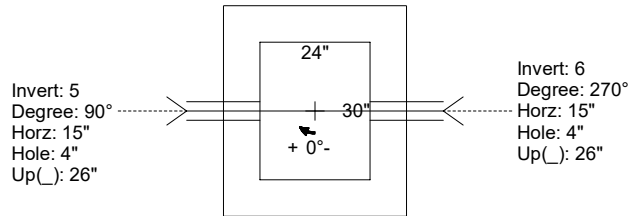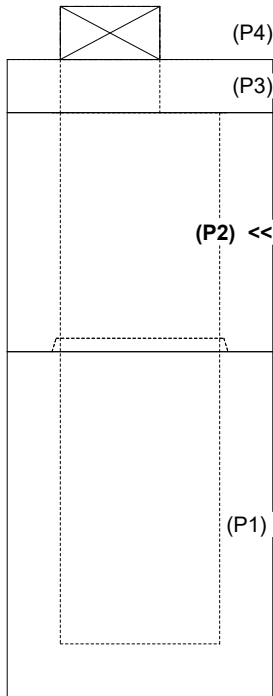

INSIDE WALL DIMENSIONS

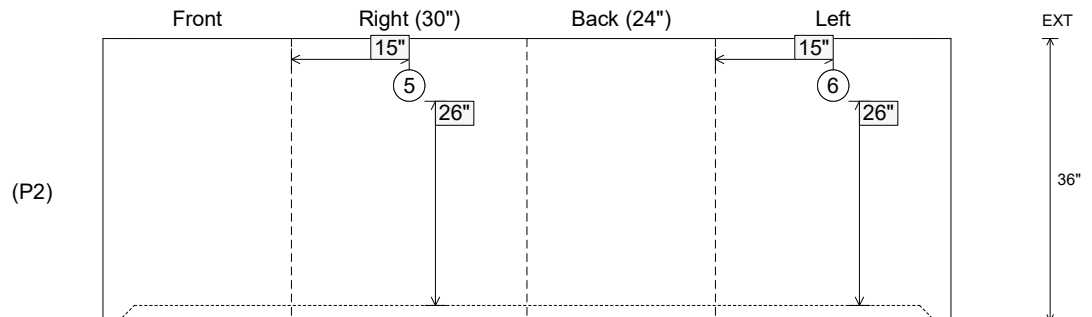

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"	Weight (Net): 3366 lb Volume (Net): 0.86cu.yd
----------------------------------	----------------------------------	--	--	--