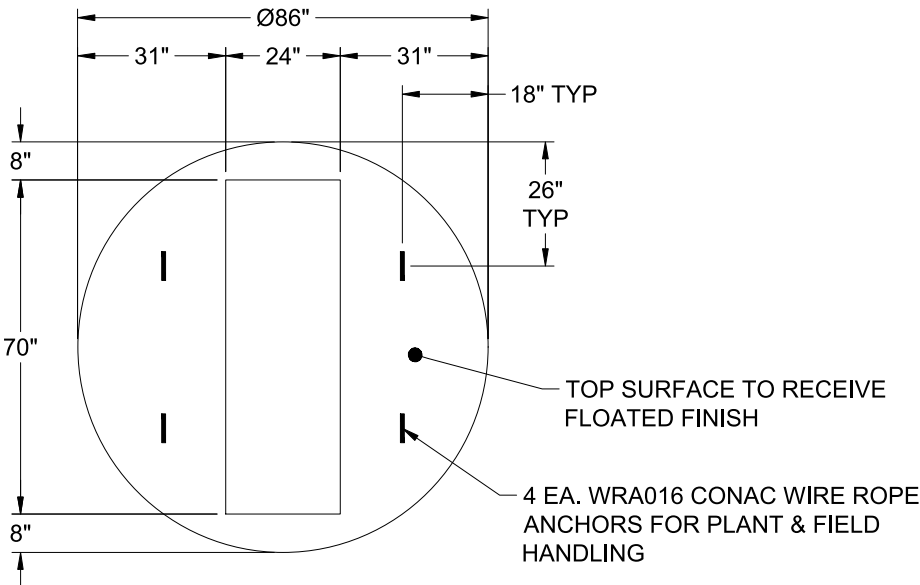
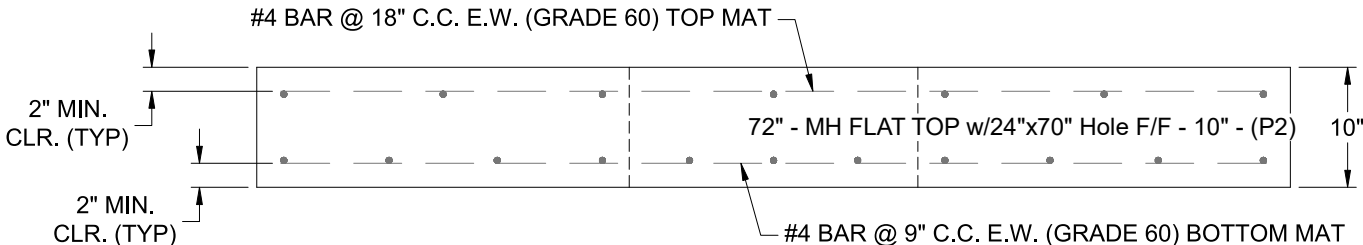


Job Name: 25-2898 - Hunter's Ridge Ph.1 Job Location: Owensboro, KY Contractor: Ernie Davis & Sons Mechanical, Inc.		Plant: 100 5/29/2026 8:45:52 AM	Tech: Jared - A PC: A. Chambers		
Structure ID: AA-3 - AB-1					
P2 MH072LD10S		MH FLAT TOP w/24"x70" Hole F/F			
P3) 24" x 70" - CASTING HEIGHT - 6" P2) 72" - MH FLAT TOP w/24"x70" Hole F/F - 10" P1) 72" - MH BASE Custom Ht F/n - 75" 1) 72" - Conseal CS-102 1.00" 1) Hole - 48 1) Hole - 22 1) Hole - 34 6) MH Step ML-10-TDS-NCR - 10"		0 lb 3465 lb 12909 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 16374 lb	Structures Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT - 2" MIN. REBAR CLEARANCE (TYP): - TOP MAT: #4 BAR @ 18" C.C. E.W. (GRADE 60) - BOTTOM MAT: #4 BAR @ 9" C.C. E.W. (GRADE 60) 4. HOE-525 DOUBLE FRAMES, GRATES, & CURB HOODS SUPPLIED BY OTHERS 5. LIFTERS: 4 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING 6. TOP SURFACE TO RECEIVE FLOATED FINISH		
					
					
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 7"	Height (Ext): 10"	Weight (Net): 3465 lb Volume (Net): 0.88cu.yd	