

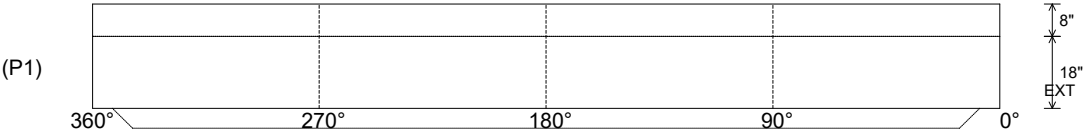


Job Name: 26-2402 ADS UK Johnson Center Job Location: Lexington, KY Contractor: ADS Advanced Drainage Systems, Inc.					Plant: Beaver Dam 6/3/2026 2:11:32 PM		Tech: PC: T. Ryan				
Structure ID: DS24											
P1 MH072BA18			MH BASE T/n								
P5) 24" - CASTING HEIGHT - 7" P4) 72" - MH FLAT LID w/24" CC Hole F/G - 15" P3) 72" - MH RISER T/G - 66" P2) 72" - MH RISER T/G - 48" P1) 72" - MH BASE T/n - 18" 1) ASSEMBLY REQUIRED 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) CASTING - HOE MCB-375-B F/Bar Grt 3) 72" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) Hole - 28 1) Hole - 16					0 lb 5097 lb 8763 lb 6997 lb 6523 lb 0 lb 0 lb 0 lb 250 lb 0 lb 0 lb 0 lb 0 lb ----- 27631 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MCB-375-B F/BAR GRT). 4. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE. 5. P2 & P3 RISERS TO BE MECHANICALLY ATTACHED BEFORE INTERNAL INSTALLATION/DELIVERY. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.				
Rim: 992.51'		Rim to Invert: 6.23'		Slack: 0.32"		Sump: 79.56"		Step Position: 0°			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions)  INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 7" Floor Height: 8"		Height (Int): 18" Height (Ext): 26"		Weight (Net): 6523 lb Volume (Net): 1.67cu.yd		