

Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures
Job Location: Bowling Green, KY
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: S. Felletter

8/11/2026 9:22:06 AM

PC: M. Sullivan



Structure ID: DBI-13

P2 BX060060-08LD08-S

BX FLAT LID 8inW w/24"x30" HOLE F/F

P3) 24" x 30" - CASTING HEIGHT - 3.50"
P2) 60" x 60" - BX FLAT LID 8inW w/24"x30" HOLE F/F - 8"
P1) 60" x 60" - BOX BASE 8inW, 8inF, Variable Ht F/n - 52"
1) CASTING - HOE KY-460-11 F/G (DBI 11)
1) 60" x 60" - Conseal CS-102 1.00"
1) 24" x 30" - Conseal CS-102 1.00"
1) DOGHOUSE INVRTD - 56"x54"
1) Hole - 50
4) MH Step ML-10-TDS-NCR - 10"

0 lb
3394 lb
10088 lb
421 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb


Structure Total: 13903 lb

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. CASTING BY ICAST (HOE KY-460-11 F/G).
- REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS/FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING DBL BAR #5 BAR @ 6" C.C.E.W. (GRADE 60)

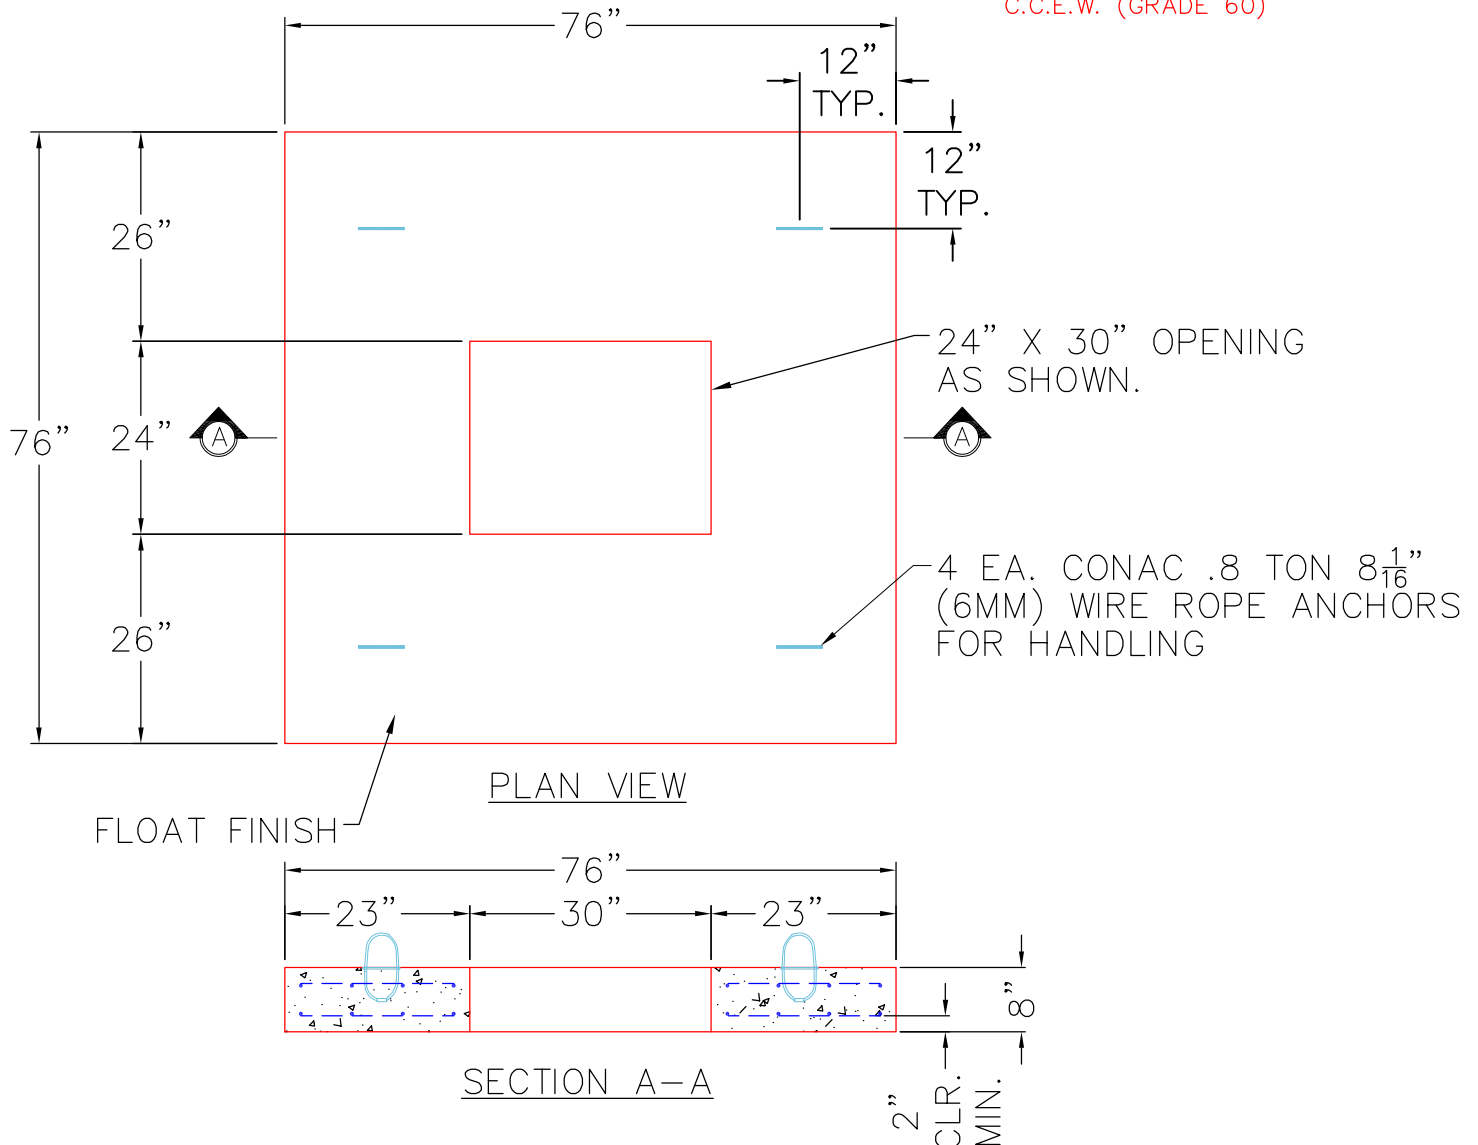

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 3394 lb
Volume (Net): 0.87cu.yd