

Job Name: 25-2471 - Texas Roadhouse
Job Location: Danville, KY
Contractor: McCain Bros Excavating LLC

Plant: 100

6/12/2026 3:42:23 PM

Tech: Jared - F
PC: M. Sullivan



Structure ID: 8

P2 MH084TS17-48ECC

MH Trans. Slab - 48" Hole ECC T/G

- P4) 24" - CASTING HEIGHT - 7"
P3) 48" - ECC CONE w/ 24" HOLE F/G - 42"
P2) 84" - MH Trans. Slab - 48" Hole ECC T/G - 17"
P1) 84" - MH BASE T/n - 78"
1) 84" - Conseal CS-102 1.00"
1) 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 38
1) Hole - 24
12) MH Step ML-10-TDS-NCR - 10"

Structure Total:


0 lb
3200 lb
5869 lb
18528 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb
27596 lb

Structure Notes:


1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. (7" TALL CASTING BY OTHERS)

REINFORCING PER ASTM A615 (GRADE 60).

- CONE (As .12)
- TRANS. SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .24)
- FLOOR (As .47) #5 BARS AT 8" C.C.E.W.

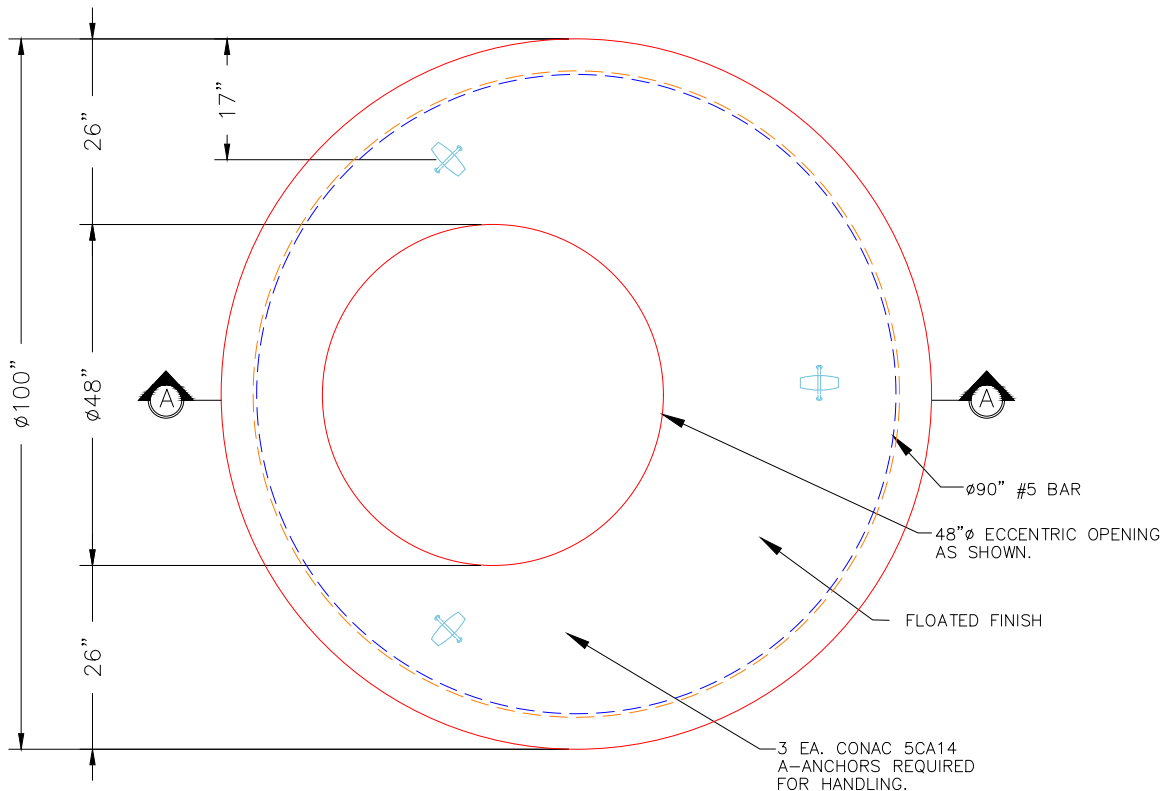

PLAN VIEW

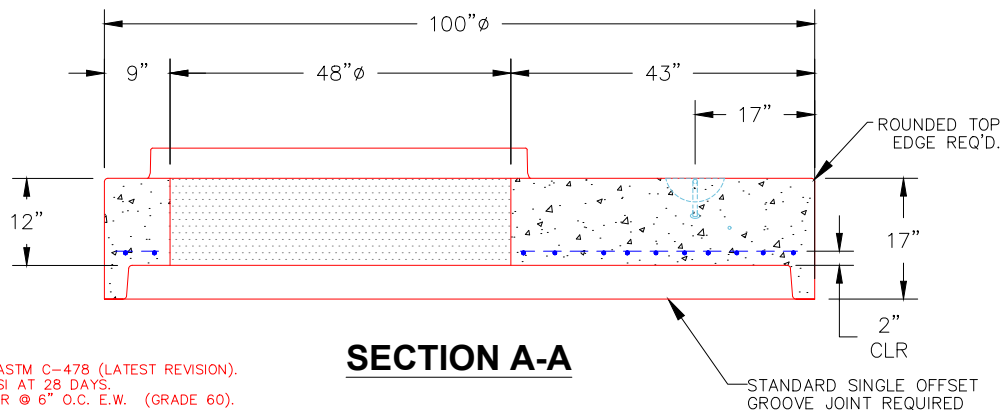

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Groove

Wall Thickness: 8"

Height (Ext): 17"

Weight (Net): 5869 lb
Volume (Net): 1.5cu.yd