


Plant: Beaver Dam

6/4/2026 8:07:04 AM

Tech:	S. Felletter
PC:	C. Goff



P3 MH096RS36

MH RISER T/G

P5) 24" - CASTING HEIGHT - 4"
P4) 96" - MH FLAT TOP SPEC. (2 - 24"Ø HOLES) F/G - 17"
P3) 96" - MH RISER T/G - 36"
P2) 96" - MH RISER T/G - 96"
P1) 96" - MH MONOBASE 13F, Custom Ht T/n - 24"

- 1) CVSTENCILING
- 1) ASSEMBLY REQUIRED
- 3) 96" - Conseal CS-102 1.00"
- 1) 24" - Conseal CS-102 1.00"
- 3) Hole - 36

0 lb
 10015 lb
 8819 lb
 21710 lb
 17113 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb

 57657 lb

Structure Notes:
4" CASTING BY OTHERS

LIFT ANCHORS TO BE INSTALLED
ON THE OUTSIDE OF THE STRUCTURE

ICAST TO INSTALL THE INTERNALS



CONTECH'S LOGO AS WELL AS THE
INLET AND OUTLET MUST BE
STENCILED ONTO THE STRUCTURE

Structure Total:


Rim: 841.96' Rim to Invert: 8' Slack: 1.044" Sump: 82.044" Step Position:

[illegible]

RIGHT-SIDE UP VIEW (int. dimensions)

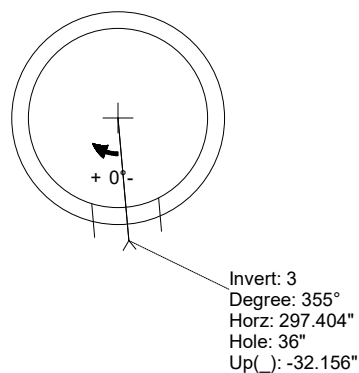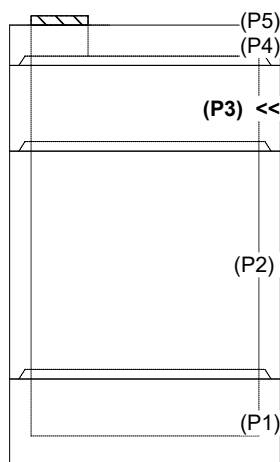

INSIDE WALL DIMENSIONS

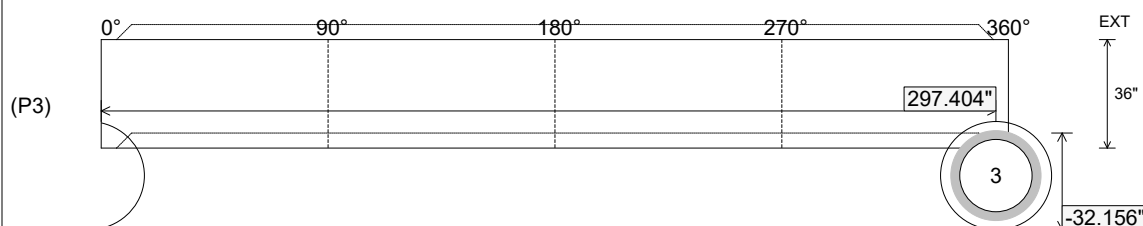

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Groove

Wall Thickness: 9"
Floor Height: 0"

Height (Int): 36"
Height (Ext): 36"

Weight (Net): 8819 lb
Volume (Net): 2.25cu.yd