



Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/17/2026 5:40:48 PM		Tech: J. Horsley - A PC: J. Jarvis			
Structure ID: 129										
P1 BX1818-06BA24					BOX BASE 6inW, 6inF F/n					
P2) 18" x 18" - CASTING HEIGHT - 4" P1) 18" x 18" - BOX BASE 6inW, 6inF F/n - 24" 1) 18" x 18" - Conseal CS-102 1.00" 1) Hole - 18					0 lb 1517 lb 0 lb 0 lb ----- 1517 lb Structure Total:		Structure Notes: 1. PER MSD YARD DRAIN / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #4 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 165-A FRAME & GRATE SUPPLIED BY OTHERS			
Rim: 568.3' Rim to Invert: 2.5' Slack: 2" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	565.8'	270°	15"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										




RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

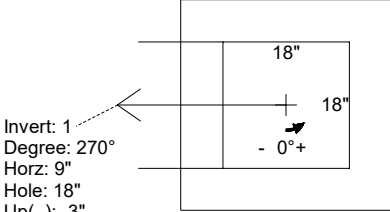

Invert: 1
Degree: 270°
Horz: 9"
Hole: 18"
Up(_): -3"

INSIDE WALL DIMENSIONS

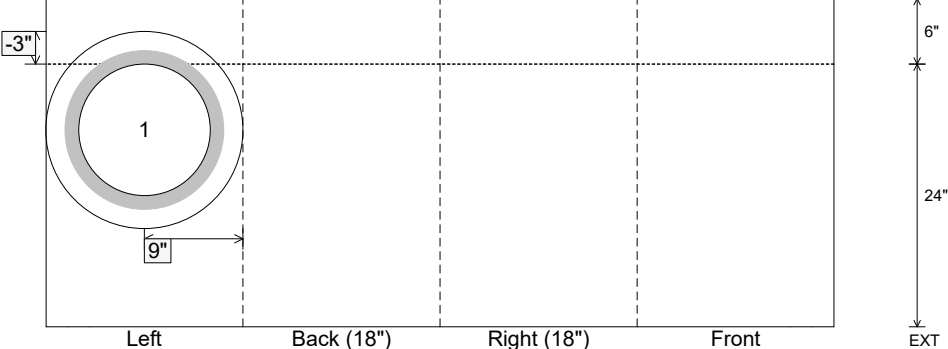

Left Back (18") Right (18") Front

6"
24"
EXT

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 1517 lb Volume (Net): 0.39cu.yd
----------------------------------	-------------------------------	--	--	--