

Job Name: 26-2722 863539 South Oldham High School
Job Location: Crestwood, KY
Contractor: Contech Engineering Solutions

Plant: Beaver Dam

7/8/2026 9:14:14 AM

Tech: S. Felletter

PC: C. Goff



Structure ID: 25-CS-6

P3 MH072LD15-30ECC

MH FLAT TOP SPEC. (30" ECC HOLE) F/G

- P4) 30" - CASTING HEIGHT - 4"
P3) 72" - MH FLAT TOP SPEC. (30" ECC HOLE) F/G - 15"
P2) 72" - MH RISER T/G - 84"
P1) 72" - MH BASE T/n - 24"
1) ASSEMBLY REQUIRED
1) CVSTENCILING
2) 72" - Conseal CS-102 1.00"
2) Hole - 24
1) Hole - 12



Structure Total:

0 lb
4661 lb
11639 lb
7398 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb
23698 lb

Structure Notes:
4" CASTING BY OTHERS
LIFTING ANCHORS TO BE INSTALLED
ON THE OUTSIDE OF THE STRUCTURE
ICAST TO INSTALL THE INTERNALS
CONTECH'S LOGO AS WELL AS THE
INLET AND OUTLET MUST BE
STENCILED ONTO THE STRUCTURE
P2 RISER TO BE MECHANICALLY
ATTACHED TO P1 BASE

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).

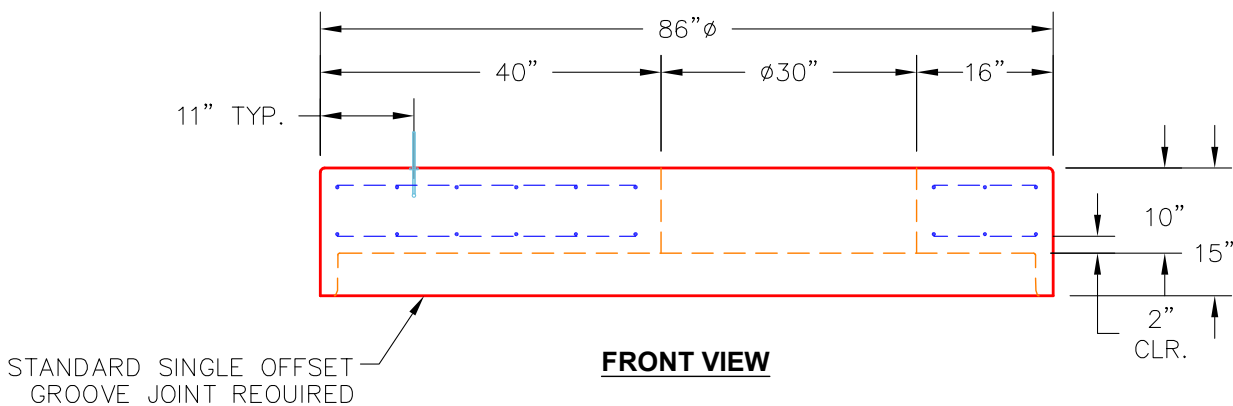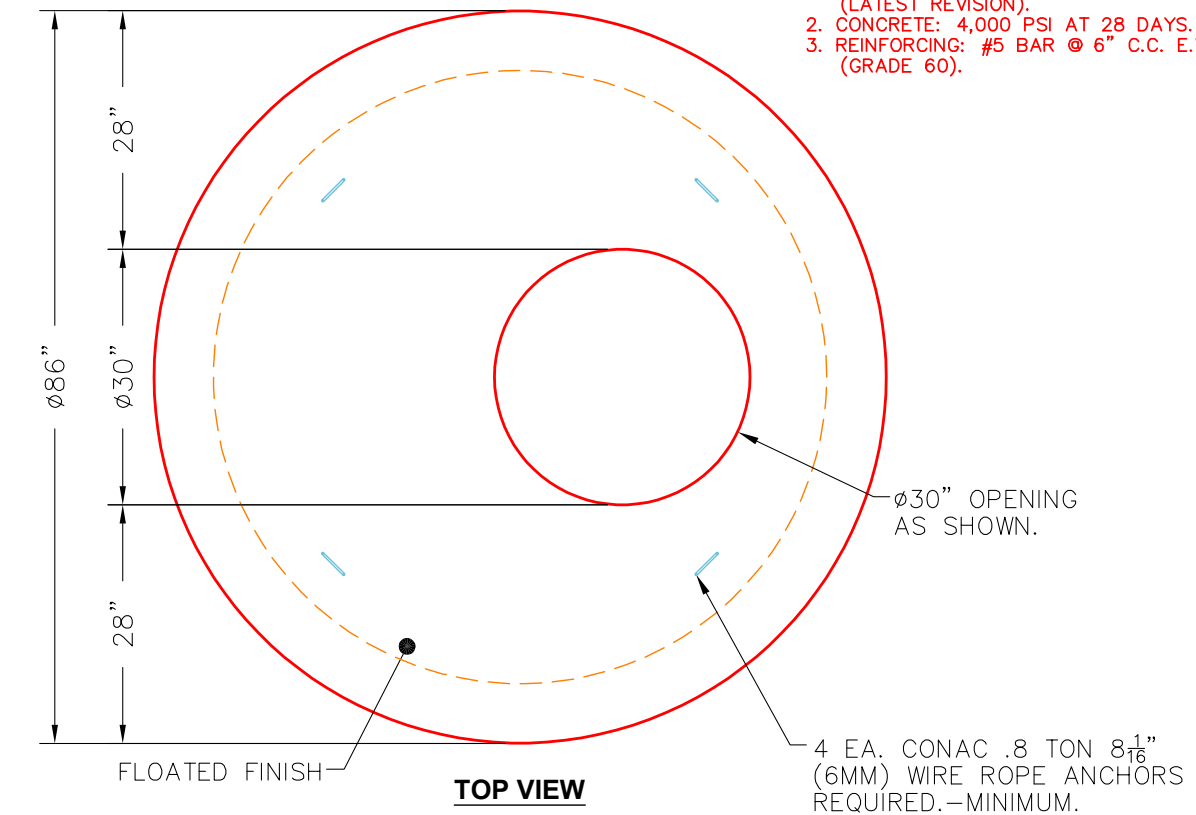

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 7"	Height (Ext): 15"	Weight (Net): 4661 lb Volume (Net): 1.19cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--