

Job Name: 25-4508 - Georgetown Commons Target
Job Location: Georgetown, KY
Contractor: Winwater Hartford KY Co.

Plant: 100

5/28/2026 11:26:55 AM

Tech: Jared - F
PC: A. Chambers



Structure ID: 14 (17)

P2 MH060LD13

MH FLAT TOP w/ 24" ECC Hole F/G


- P4) 24" - CASTING HEIGHT - 7"
P3) 24" - GRADE RING F/F - 4"
P2) 60" - MH FLAT TOP w/ 24" ECC Hole F/G - 13"
P1) 60" - MH BASE T/n - 72"
1) CASTING - HOE MC-375 F/C Storm
1) 60" - Conseal CS-102 1.00"
2) Hole - 38
1) Hole - 30
6) MH Step ML-10-TDS-NCR - 10"

0 lb
270 lb
2869 lb
8660 lb
271 lb
0 lb
0 lb
0 lb
0 lb
0 lb
Structure Total: 12070 lb


Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE MC-375 F/C STORM).

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

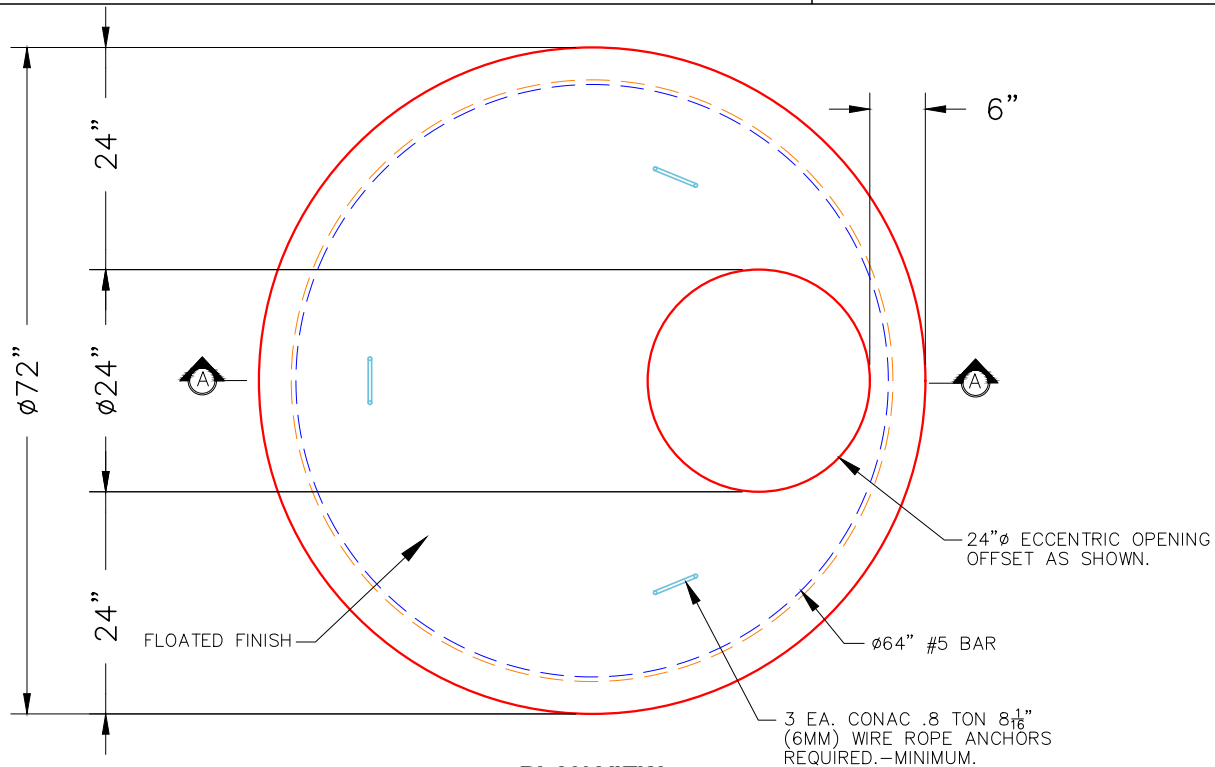

PLAN VIEW

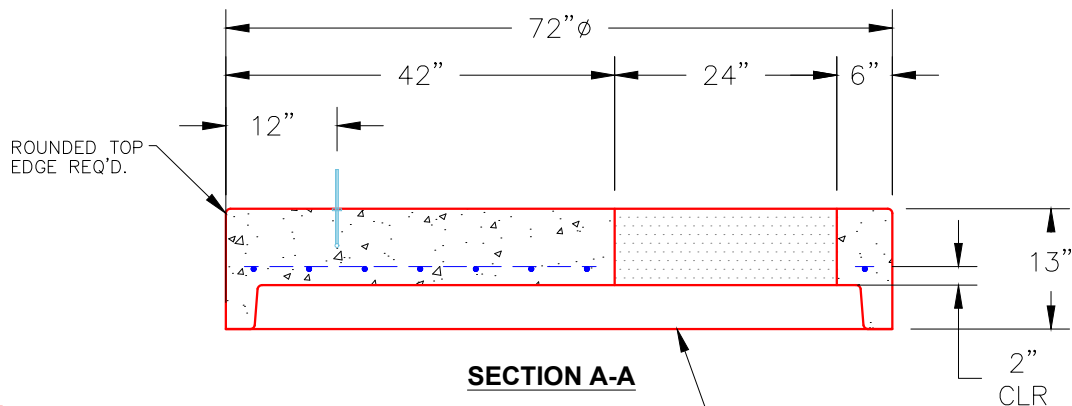

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 6"

Height (Ext): 13"

Weight (Net): 2869 lb
Volume (Net): 0.73cu.yd