

Job Name: 25-4733 - The Paddock
 Job Location: Springfield, KY
 Contractor: Core & Main LP (Lou)

Plant: 100
 5/14/2026 1:09:52 PM

Tech: Jared - F
 PC: T. Lewis



Structure ID: CI-A2

P2 BX2436-08R24

BOX RISER 8inW F/G

- P3) 24" x 36" - CASTING HEIGHT - 6"
- P2) 24" x 36" - BOX RISER 8inW F/G - 24"
- P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht T/n - 60"
- 1) CASTING - HOE 525 SET FLAT GRATE (F/G/H)
- 2) 24" x 36" - Conseal CS-102 1.00"
- 1) Hole - 30
- 1) Hole - 24

0 lb
 2449 lb
 6816 lb
 442 lb
 0 lb
 0 lb
 0 lb

 Structure Total: 9707 lb



Structure Notes:
 1. PER ASTM C913 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. NO STEPS AND NO INVERT CHANNEL.
 4. CASTING BY ICAST (HOE 525 SET FLAT GRATE (F/G/H)).

REINFORCING PER ASTM A615 (GRADE 60).
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.


Rim: 887.42' Rim to Invert: 7.46' Slack: 1.395" Sump: 1.875" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

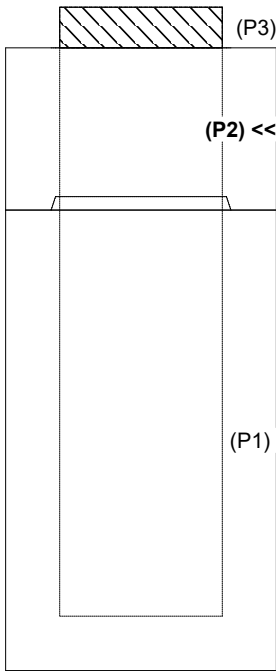

INSIDE WALL DIMENSIONS

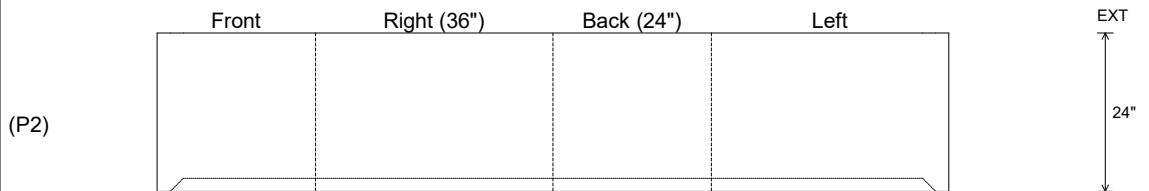

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 8"
 Floor Height: 0"

Height (Int): 24"
 Height (Ext): 24"

Weight (Net): 2449 lb
 Volume (Net): 0.63cu.yd