
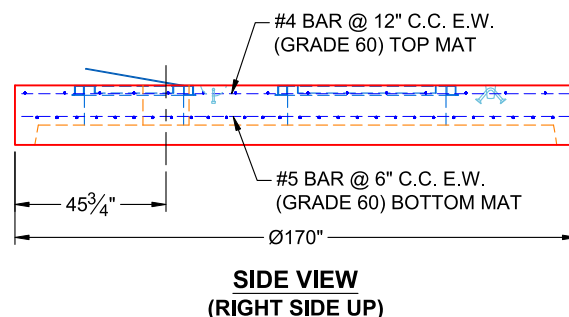
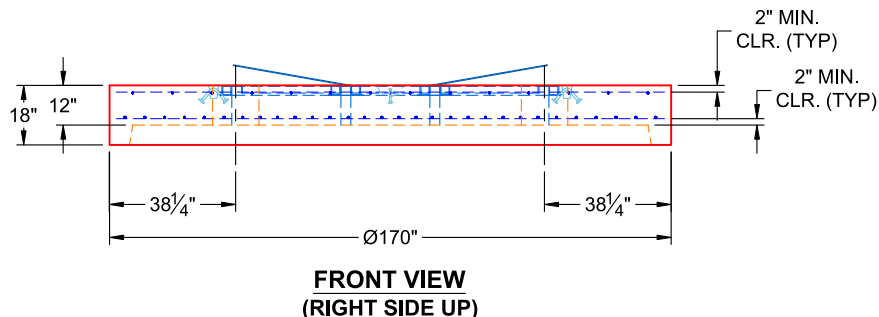


MH FLAT TOP w/(2) 48"x36" & (1) 30"x30" Hatches

0 lb	<u>Structure Notes:</u>
19644 lb	1. PER ASTM C-478 SPECIFICATIONS
36049 lb	2. CONCRETE: 4,500 PSI AT 28 DAYS
36049 lb	3. REINFORCEMENT - 2" MIN. REBAR CLEARANCE (TYP):
36049 lb	- TOP MAT: #4 BAR @ 12" C.C. E.W. (GRADE 60)
30130 lb	- BOTTOM MAT: #5 BAR @ 6" C.C. E.W. (GRADE 60)
39815 lb	4. 2 EA. HALLIDAY W1R 48" X 36" HATCHES & 1 EA.
39815 lb	HALLIDAY W1R 30" X 30" HATCH SUPPLIED BY
39445 lb	OTHERS - TO BE CAST INTO FLAT LID
0 lb	5. 2 EA. 12" DUCTILE IRON VENT PIPES SUPPLIED BY
0 lb	OTHERS (INSTALLED IN FIELD BY OTHERS)
13500 lb	6. LIFTERS: 3 EA. 8CA18 CONAC A-ANCHORS FOR
0 lb	PLANT & FIELD HANDLING
1 lb	7. TOP SURFACE TO RECEIVE LIGHT BRUSH FINISH

326546 lb	

Structure Total: 326546 lb 7. TOP SURFACE TO RECEIVE LIGHT BRUSH FINISH

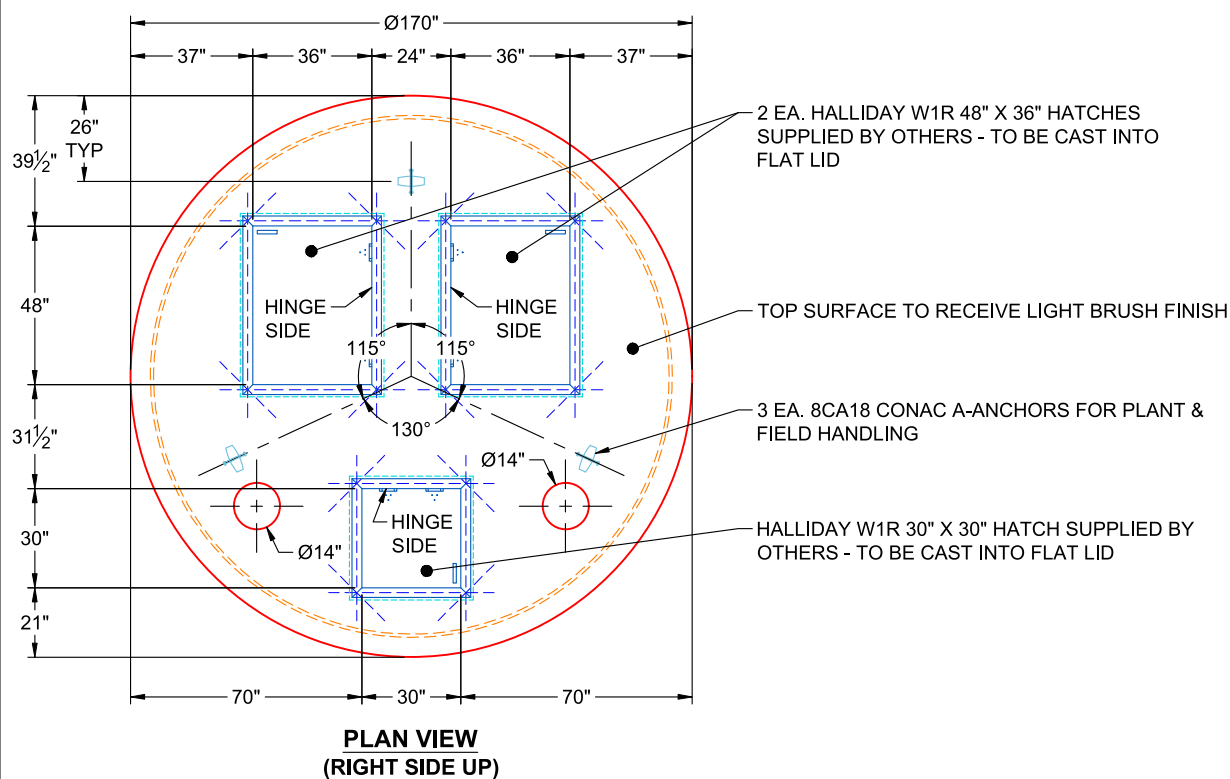

Weight (Net): 19644 lb
Volume (Net): 5.02cu.yd

Job Number:

25-4665

Job Name:

Buckhorn WTP

Structure:

54665 (4)

Note:

2 Ea. Halliday W1R 48" x 36"

Hatches & 1 Ea. Halliday W1R 30" x
30" Hatch Supplied By Others To Be
Cast Into Flat Lid