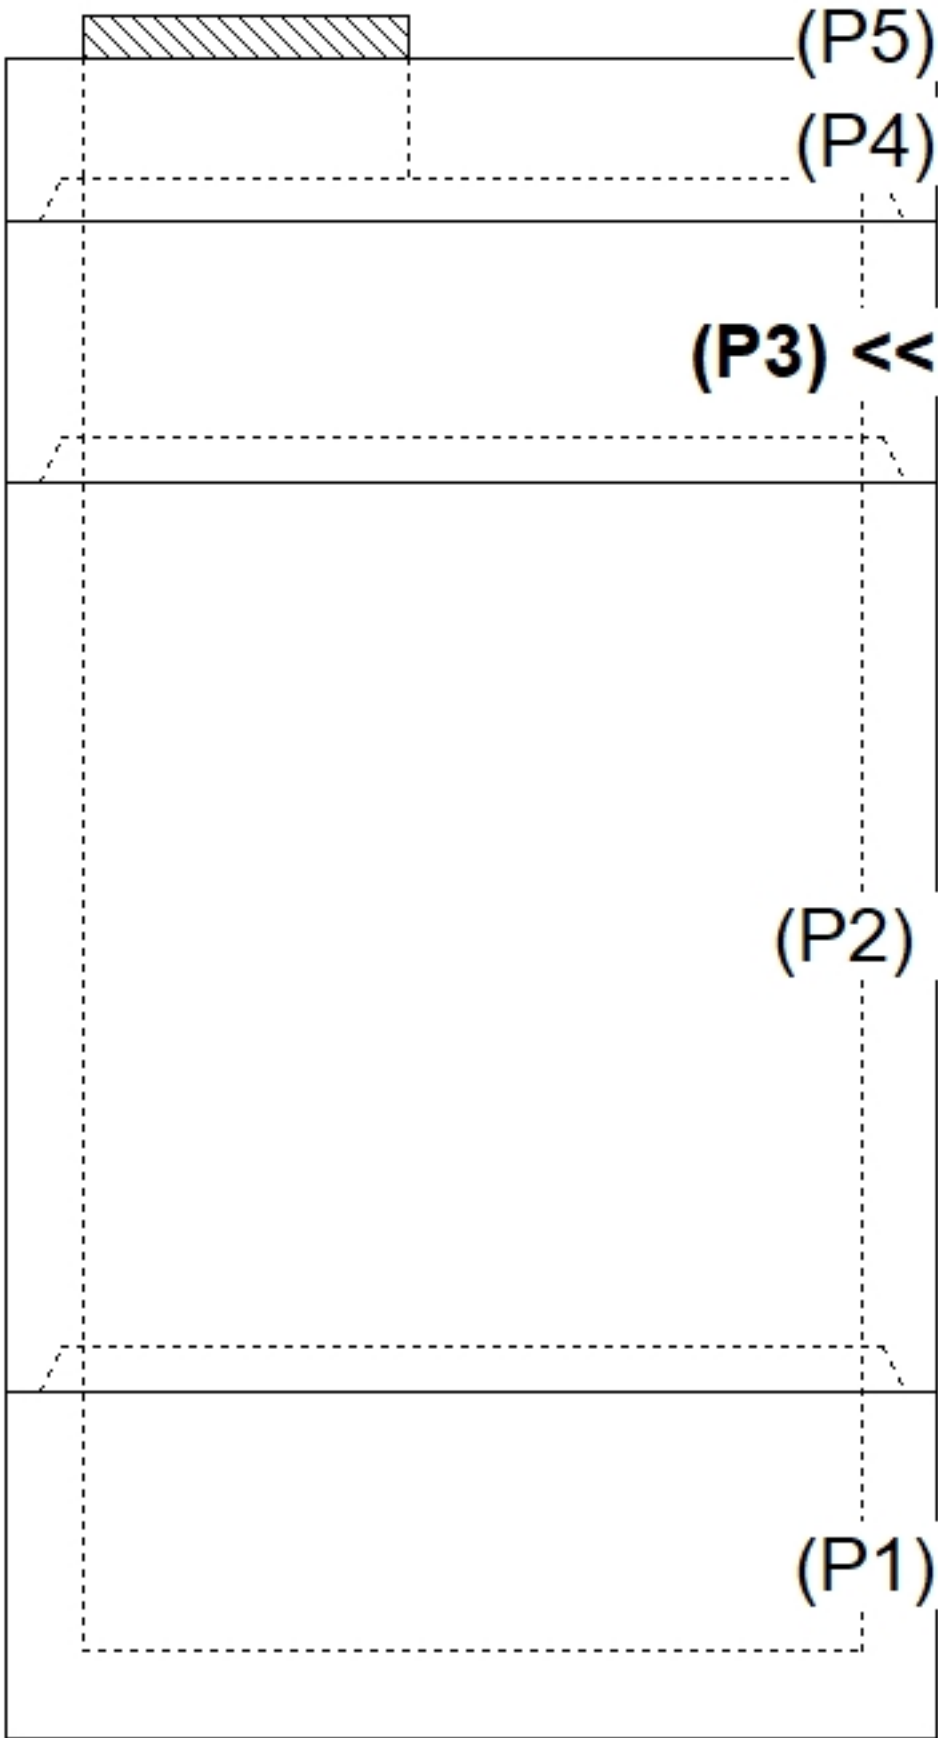
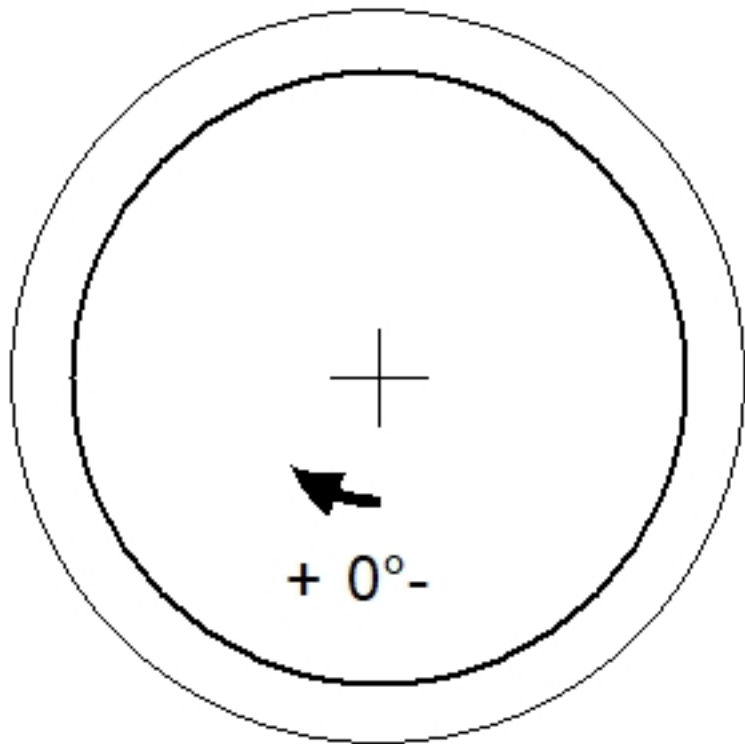
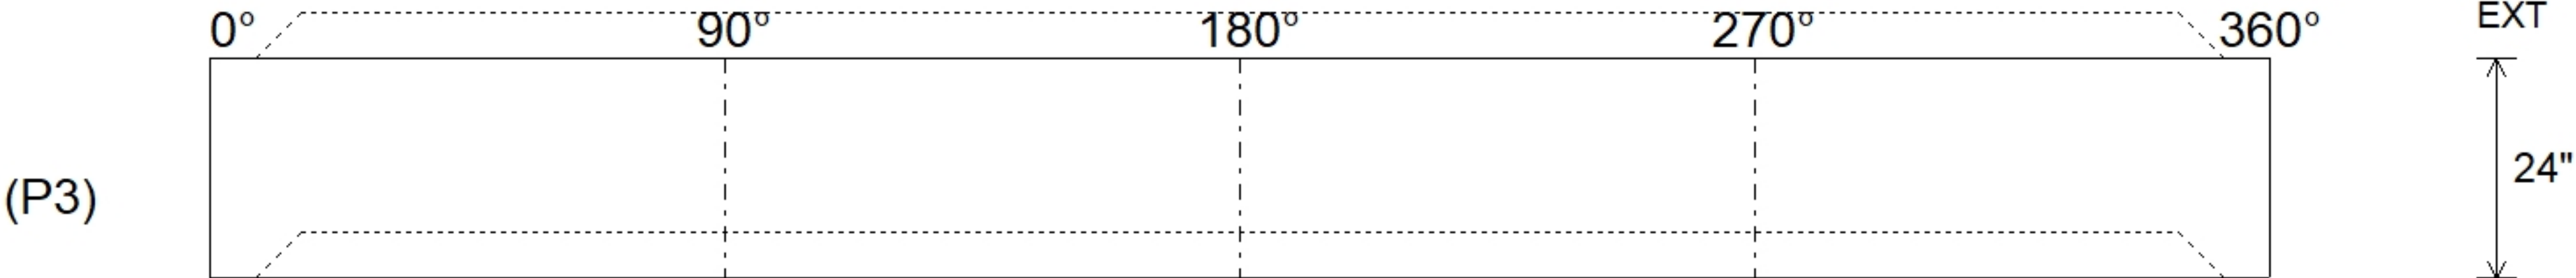


Job Name: 26-2799 892503 Regent Crt Condo Unit 5 Job Location: Dearborn, MI Contractor: Contech Engineering Solutions					Plant: Beaver Dam 6/25/2026 10:44:08 AM		Tech: S. Felletter PC: C. Goff						
Structure ID: 10-CS-6													
P3			MH072RS24			MH RISER T/G							
P5) 30" - CASTING HEIGHT - 4" P4) 72" - MH FLAT TOP SPEC. (30" ECC HOLE) F/G - 15" P3) 72" - MH RISER T/G - 24" P2) 72" - MH RISER T/G - 84" P1) 72" - MH BASE T/n - 24" 1) ASSEMBLY REQUIRED 1) CVSTENCILING 3) 72" - Conseal CS-102 1.00" 1) Hole - 24 1) Hole - 28						0 lb 4661 lb 3499 lb 11606 lb 7398 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 27163 lb		Structure Notes: 4" CASTING BY OTHERS . LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE . ICAST TO INSTALL THE INTERNALS . CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE					
Rim: 602.5'		Rim to Invert: 7.1'		Slack: 3.236"		Sump: 69.036"		Step Position: 0°					
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset			
Invert 1													
Invert 2													
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													
RIGHT-SIDE UP VIEW (int. dimensions)													
													
INSIDE WALL DIMENSIONS													
													
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 7" Floor Height: 0"		Height (Int): 24" Height (Ext): 24"		Weight (Net): 3499 lb Volume (Net): 0.89cu.yd				