




Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC					Plant: Beaver Dam 6/26/2026 7:35:38 AM		Tech: J. Horsley PC: C. Goff						
Structure ID: 201													
P1		BX2436-08BVF		BOX BASE 8inW, 8inF, Variable Ht F/n									
P4) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10" P3) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18" P2) 24" x 36" - FIELD ADJUSTMENT - 3" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 32" 1) CASTING - HOE KY-206 F/C (KY TY1) 1) This Structure Includes a Cast-in Item - KY-206 Frame (Supplied by iCast) 2) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 24 1) Hole - 26 1) Hole - 6						3400 lb 5270 lb 0 lb 4058 lb 206 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 12934 lb		Structure Notes: ** KYTC STATE PROJECT ** STATION: 410+10 RT 1. PER KYTC CBI TYPE A / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE KY-206 FRAME & COVER "STORM" SUPPLIED BY ICAST - FRAME TO BE CAST INTO TOP PHASE TOP FLANGE SIDE UP					
Rim: 565.82' Rim to Invert: 5.28' Slack: 0.36" Sump: 0" Step Position:													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset			
Invert 1	560.54'	180°	20"	18" HDPE	21.2"	Hole 24	24"	24"	-1.625"	0"			
Invert 2	560.56'	90°	30"	18" RCP B WALL	23"	Hole 26	26"	26"	-2.25"	4"			
Invert 3	562.07'	90°	12"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	18"	-14"			
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													

RIGHT-SIDE UP VIEW (int. dimensions)

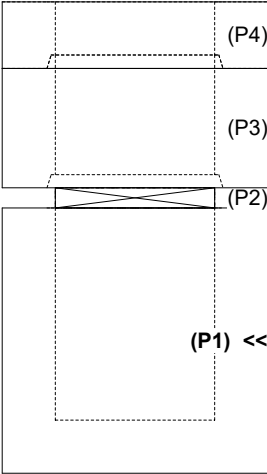

UPSIDE-DOWN VIEW (int. dimensions)

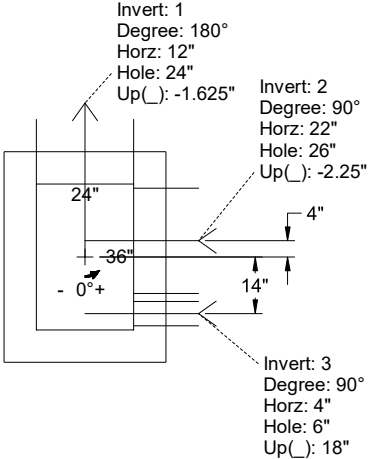

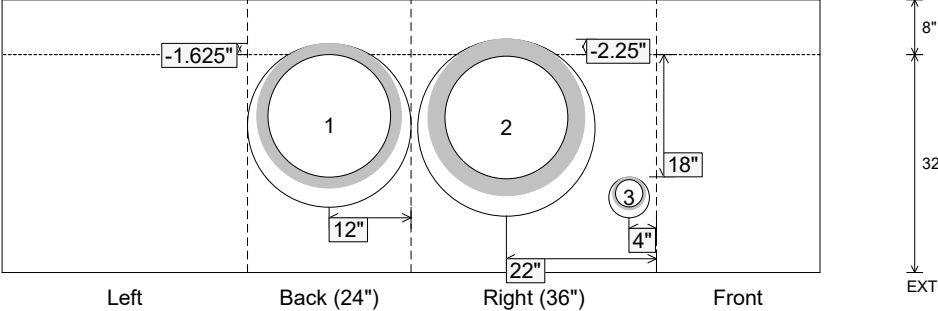INSIDE WALL DIMENSIONS	
	

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 32" Height (Ext): 40"	Weight (Net): 4058 lb Volume (Net): 1.04cu.yd
----------------------------------	-------------------------------	--	--	--