



Weight (Net): 2266 lb
Volume (Net): 0.58cu.yd

Job Name: 26-1456 Double Kwik Job Location: Whitesburg, KY Contractor: Rising Sun Development Company					Plant: Beaver Dam 6/17/2026 2:56:19 PM		Tech: S. Felletter PC: E. Bradley					
Structure ID: 88 70-9 DBI10												
P1 BX1628-08BAVF		BOX BASE 8inW, 8inF, Variable Ht F/n										
P2) 16" x 28" - CASTING HEIGHT - 5" P1) 16" x 28" - BOX BASE 8inW, 8inF, Variable Ht F/n - 19" 1) CASTING - HOE KY-550 F/G (DBI TY 10) 1) Hole - 18 1) Hole - 8					0 lb 2266 lb 550 lb 0 lb 0 lb ----- Structure Total: 2816 lb		Structure Notes: 1. KYTC DBI TYPE 10 / ASTM C-913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. NO STEPS. 5. CASTING BY ICAST (HOE KY-550 F/G). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Second pour drawing					First pour weight = 957 LBS							
Second pour weight = 1309 LBS												
Rim: 1190.7'					Rim to Invert: 2'		Slack: 0"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	1188.7'	90°	22"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"		
Invert 2	1188.8'	330°	11.381"	4" PVC SDR35	4.25"	Hole 8	8"	9.238"	-0.8"	7"		
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												


RIGHT-SIDE UP VIEW (int. dimensions)

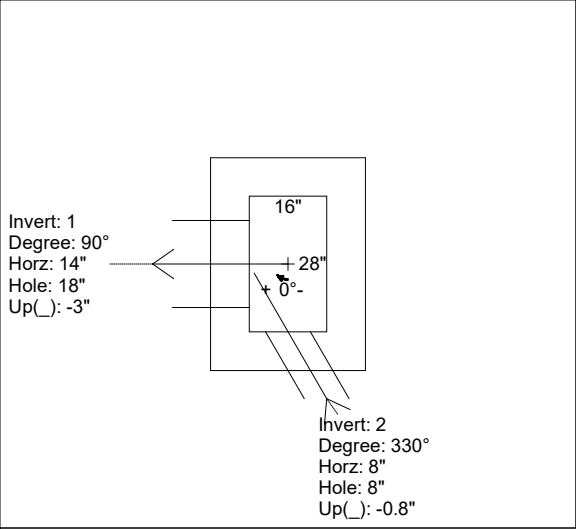

UPSIDE-DOWN VIEW (int. dimensions)



INSIDE WALL DIMENSIONS

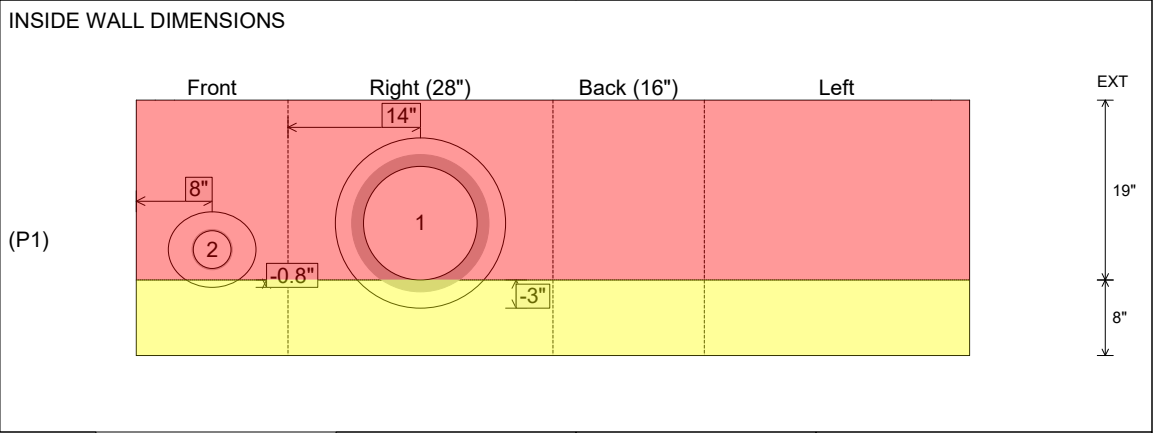

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 19"
Height (Ext): 27"

Weight (Net): 2266 lb
Volume (Net): 0.58cu.yd