



Job Name: 26-2090 - Monroe Co Area Tech Center Renovation Job Location: Tompkinsville, KY Contractor: Lindsey's Dirt Works LLC					Plant: 100 7/20/2026 6:19:57 PM		Tech: Jared - F PC: M. Sullivan				
Structure ID: 3 ST-MH											
P2 MH048RS36S		MH RISER F/G									
P4) 24" - CASTING HEIGHT - 7" P3) 48" - MH FLAT TOP w/ 24" ECC Hole F/F - 7" P2) 48" - MH RISER F/G - 36" P1) 48" - MH BASE T/n - 42" 1) CASTING - HOE MC-375 F/C Storm 2) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 1) Hole - 16 1) Hole - 6 1) Hole - 10 7) MH Step ML-10-TDS-NCR - 10"					0 lb 1286 lb 2470 lb 4179 lb 271 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MC-375 F/C STORM). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Structure Total: 8206 lb											
Rim: 863.04' Rim to Invert: 7.69' Slack: 0.28" Sump: 0" Step Position: 180°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2	860.33'	90°	45.5"	4" HDPE	4.8"	Hole 6	6"	6.016"	13.125"	0"	
Invert 3	860.79'	270°	136.625"	6" HDPE	6.9"	Hole 10	10"	10.074"	18.625"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

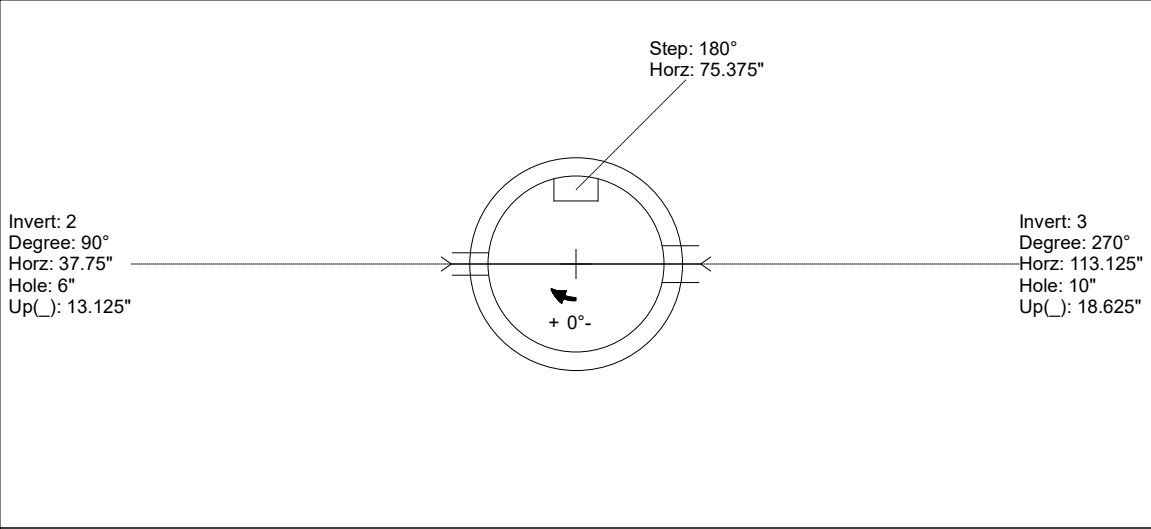

INSIDE WALL DIMENSIONS

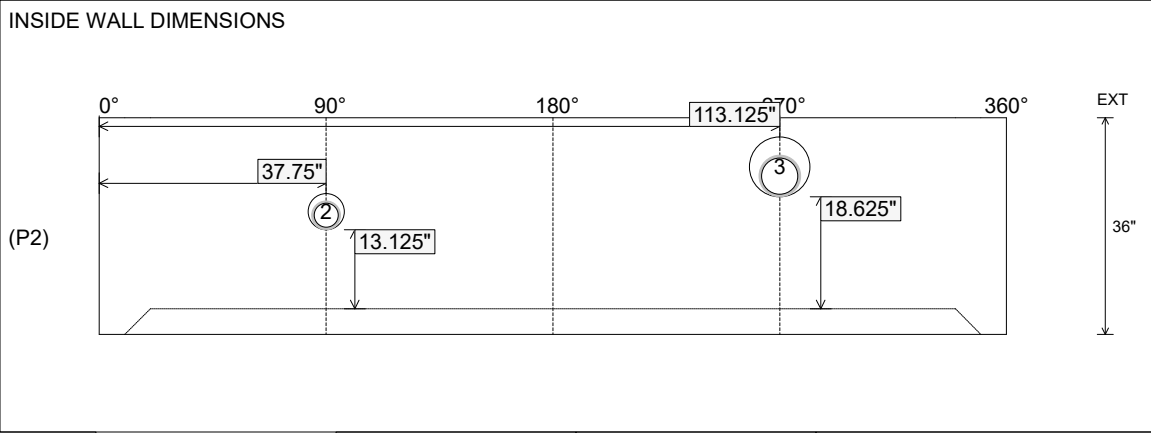

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"	Weight (Net): 2470 lb Volume (Net): 0.63cu.yd
----------------------------------	----------------------------------	--	--	--