



Structure ID: C1-11 HW

P1 HWA8F


8" - HW AW w/FLAT BOTTOM F/F

DIMENSIONS & QUANTITIES


TYPE	PIPE Ø	A	B	C	D	E	F	OPENING SIZE	WEIGHT
AW	8"	2'-0"	4'-0"	2'-6"	2'-2"	2'-0"	6"	12" TO 8" STEP	1,380 LBS

NOTES:


1. CONCRETE: 4500 PSI AT 28 DAYS MINIMUM COMPRESSIVE STRENGTH.
2. REINFORCING: #4 BAR @ 12" C/C E.W. - GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR POCKETS TO BE GROUTED WITH NON-SHRINK GROUT AFTER SETTING.

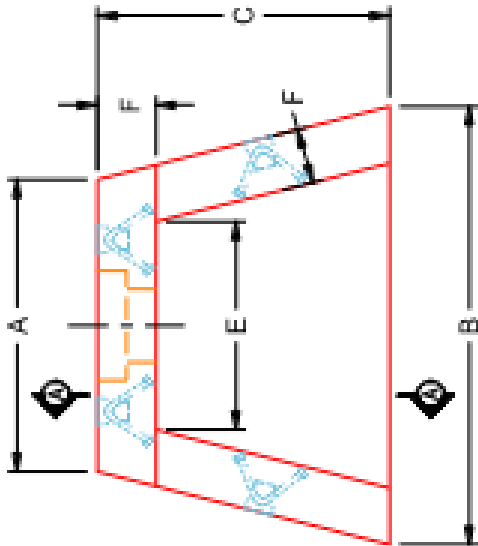

PLAN VIEW

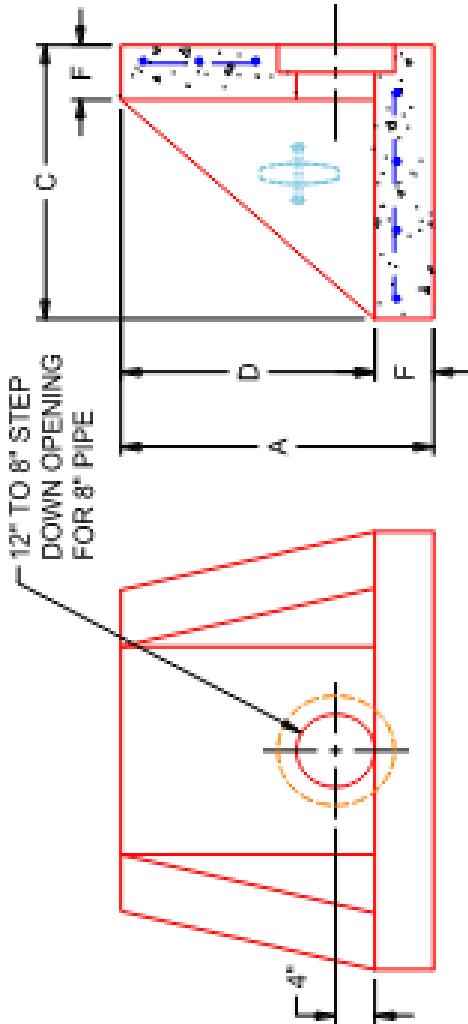

FRONT ELEVATION

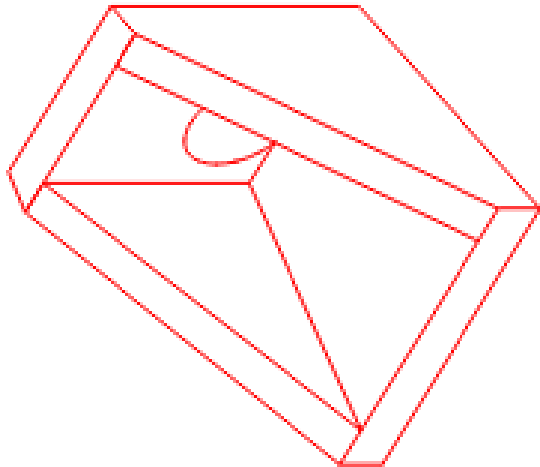

ISOMETRIC VIEW

SECTION A-A

REVISION INFORMATION

REV. DATE: NO REVISIONS TO DATE



SUBMITTAL DRAWING: 8" AW HW
CUSTOMER: HAYES PIPE SUPPLY
PROJECT: WELLS FARGO SMYRNA
STRUCTURE: C1-11 HW
QUOTE/SALES ORDER NO: 26-1185
PC: E. BRADLEY
DATE: 04/29/26
SCALE: NTS
PG. 1 of 1