



P5) 24" x 24" - CASTING HEIGHT - 7"	0 lb	Structure Notes: **INDOT STATE PROJECT** 1. INDOT MH TYPE M / ASTM C478 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING. - RISER/WALLS (As .30) - FLOOR (As .62) #5 BARS AT 6" C.C.E.W.
P4) 120" - MH FLAT TOP w/24"x24" Hole - 18"	16553 lb	
P3) 120" - MH RISER Custom Ht - 35"	13296 lb	
P2) 120" - MH RISER - 96"	36468 lb	
P1) 120" - MH BASE - 96"	37205 lb	
3) 120" - Conseal CS-102 1.00"	0 lb	
1) 24" x 24" - Conseal CS-102 1.00"	0 lb	
1) Hole - 90	0 lb	
2) Hole - 75	0 lb	
18) MH Step ML-10-TDS-NCR - 10"	0 lb	
Structure Total: 103521 lb		
Rim: 506.24' Rim to Invert: 20.49' Slack: 0.88" Sump: 7" Step Position: 90°		


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

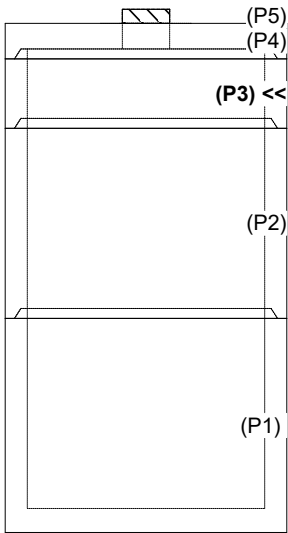

INSIDE WALL DIMENSIONS

(P3)



Coating (Int):	Seam Up: Tongue	Wall Thickness: 11"	Height (Int): 35"	Weight (Net): 13296 lb
Coating (Ext):	Seam Dn: Groove	Floor Height: 0"	Height (Ext): 35"	Volume (Net): 3.4cu.yd