Job Name: 25-3452 - Churchill Downs Skye Terrace Improvements Job Location: Louisville, KY 40208 Contractor: Louisville Paving and Construction	Plant: 100 4/30/2026 1:23:03 PM	Tech: Jared - F PC: J. Jarvis	

Structure ID: S211

P3 MH060LD13-32SQ **MH FLAT TOP w/32"x32" Hole F/G**

P4) 32" x 32" - CASTING HEIGHT - 3"	0 lb
P3) 60" - MH FLAT TOP w/32"x32" Hole F/G - 13"	2369 lb
P2) 60" - MH RISER T/G - 18"	1854 lb
P1) 60" - MH BASE Custom Ht T/n - 64"	8514 lb
1) CASTING - HOE 595 F/G	376 lb
2) 60" - Conseal CS-102 1.00"	0 lb
1) 32" x 32" - Conseal CS-102 1.00"	0 lb
2) Hole - 30	0 lb
1) Hole - 20	0 lb
1) Hole - 8	0 lb
Structure Total:	13112 lb

Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE 595 F/G)

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

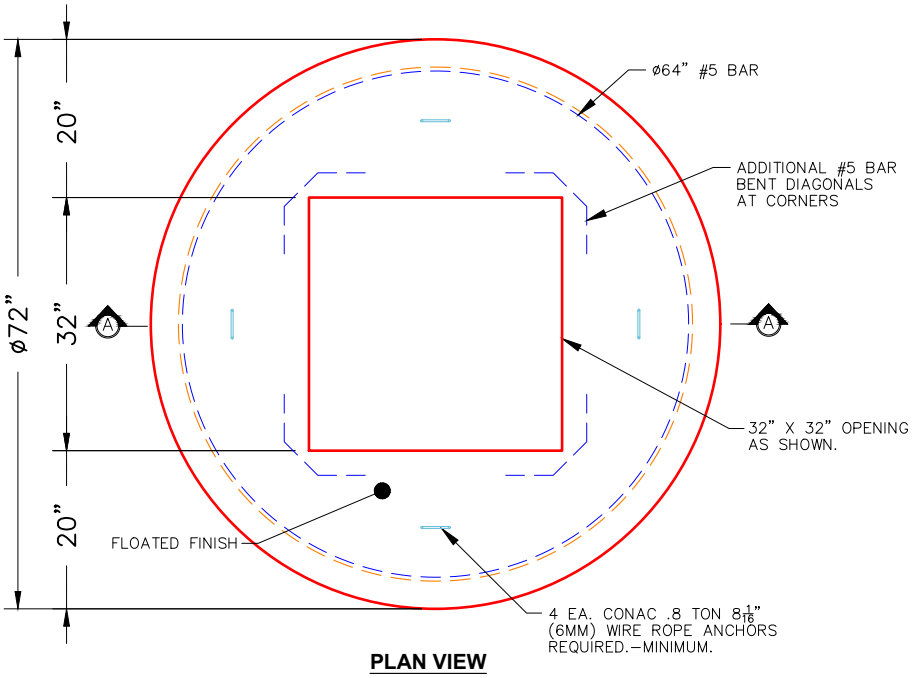

PLAN VIEW

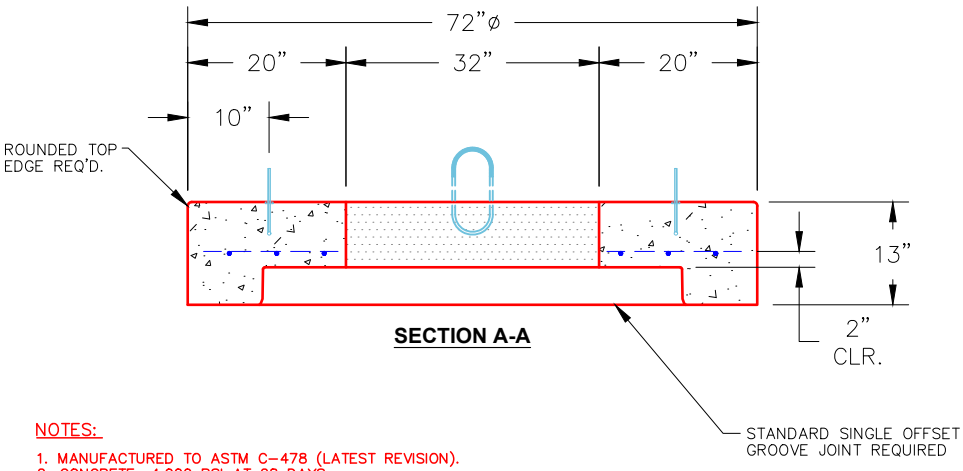

SECTION A-A

NOTES:
1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 6"	Height (Ext): 13"	Weight (Net): 2369 lb Volume (Net): 0.6cu.yd