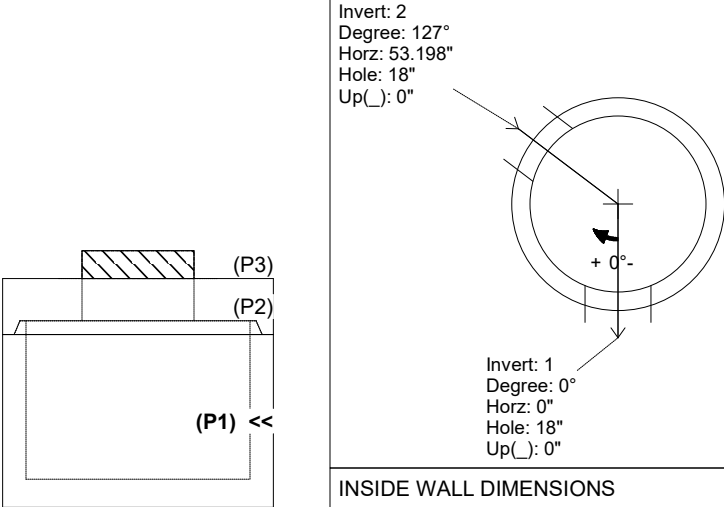
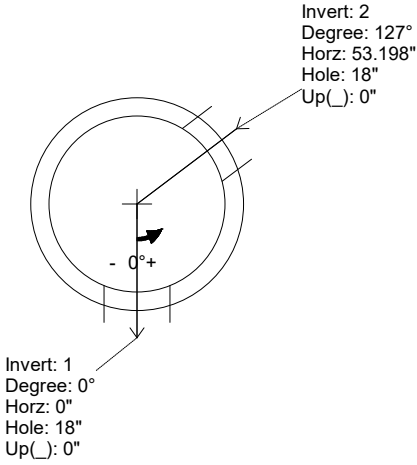
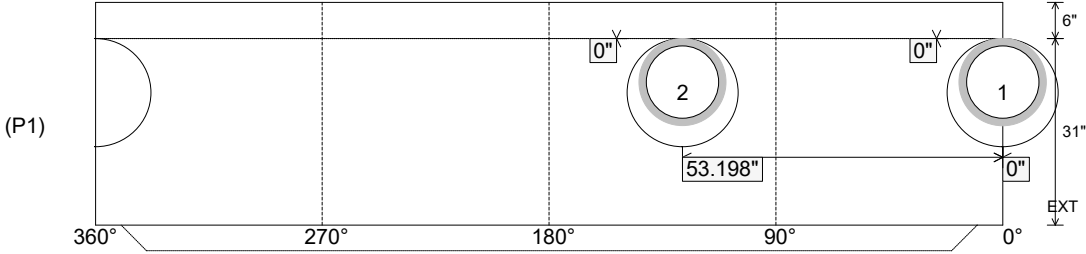


Job Name: 25-4490P2 Heartland Meadows Subdivision Job Location: Elizabethtown, KY 40165 Contractor: Kauffeld Brothers Construction					Plant: 100 7/30/2026 10:22:58 AM		Tech: Jared - A PC: Celina Goff				
Structure ID: CB 5-57 (67)											
P1 MH048BAVF		MH BASE Custom Ht									
P3) 24" x 30" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/24"x30" Hole - 12" P1) 48" - MH BASE Custom Ht - 31" 1) CASTING - HOE 360 L Vane Set (F/G/H) 1) 48" - Conseal CS-102 1.00" 1) 24" x 30" - Conseal CS-102 1.00" 2) Hole - 18						0 lb 1935 lb 3202 lb 362 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 5500 lb		Structure Notes: . 1. HOE 360 FLAT SET PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. NO INVERT CHANNEL. 5. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - WALLS (As .12) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 867.39' Rim to Invert: 4' Slack: 0.25" Sump: 1.25" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	863.39'	0°	0"	12" HDPE	14.5"	Hole 18	18"	18.451"	0"	0"	
Invert 2	863.39'	127°	64.28"	12" HDPE	14.5"	Hole 18	18"	18.451", 12.728"	0"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)   INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 5" Floor Height: 6"		Height (Int): 31" Height (Ext): 37"		Weight (Net): 3202 lb Volume (Net): 0.82cu.yd		