

Job Name: 26-1333B Mitchell Hill Road Project
Job Location: Louisville, KY
Contractor: Hall Contracting of Kentucky Inc

Plant: Beaver Dam

8/13/2026 3:43:05 PM

Tech: S. Felletter

PC: J. Jarvis



Structure ID: STR-3


P2 BX024024-08LD08S

BX FLAT LID 8inW SPEC. (KY JB-B1) F/F

- P3) CASTING (cast in) - 0
P2) 24" x 24" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"
P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 44"
1) CASTING - HOE KY-206 F/C (KY TY1)
1) This Structure Includes a Cast-in Item
1) 24" x 24" - SGL 1"x14.5' Butyl
1) Hole - 22
1) Hole - 20

Structure Total:

- 0 lb
770 lb
4389 lb
206 lb
0 lb
0 lb
0 lb
0 lb
5365 lb
- Structure Notes:**
1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH.
4. CASTING BY ICAST (HOE KY-206 F/C). CAST-IN.
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12: C.C.E.W.

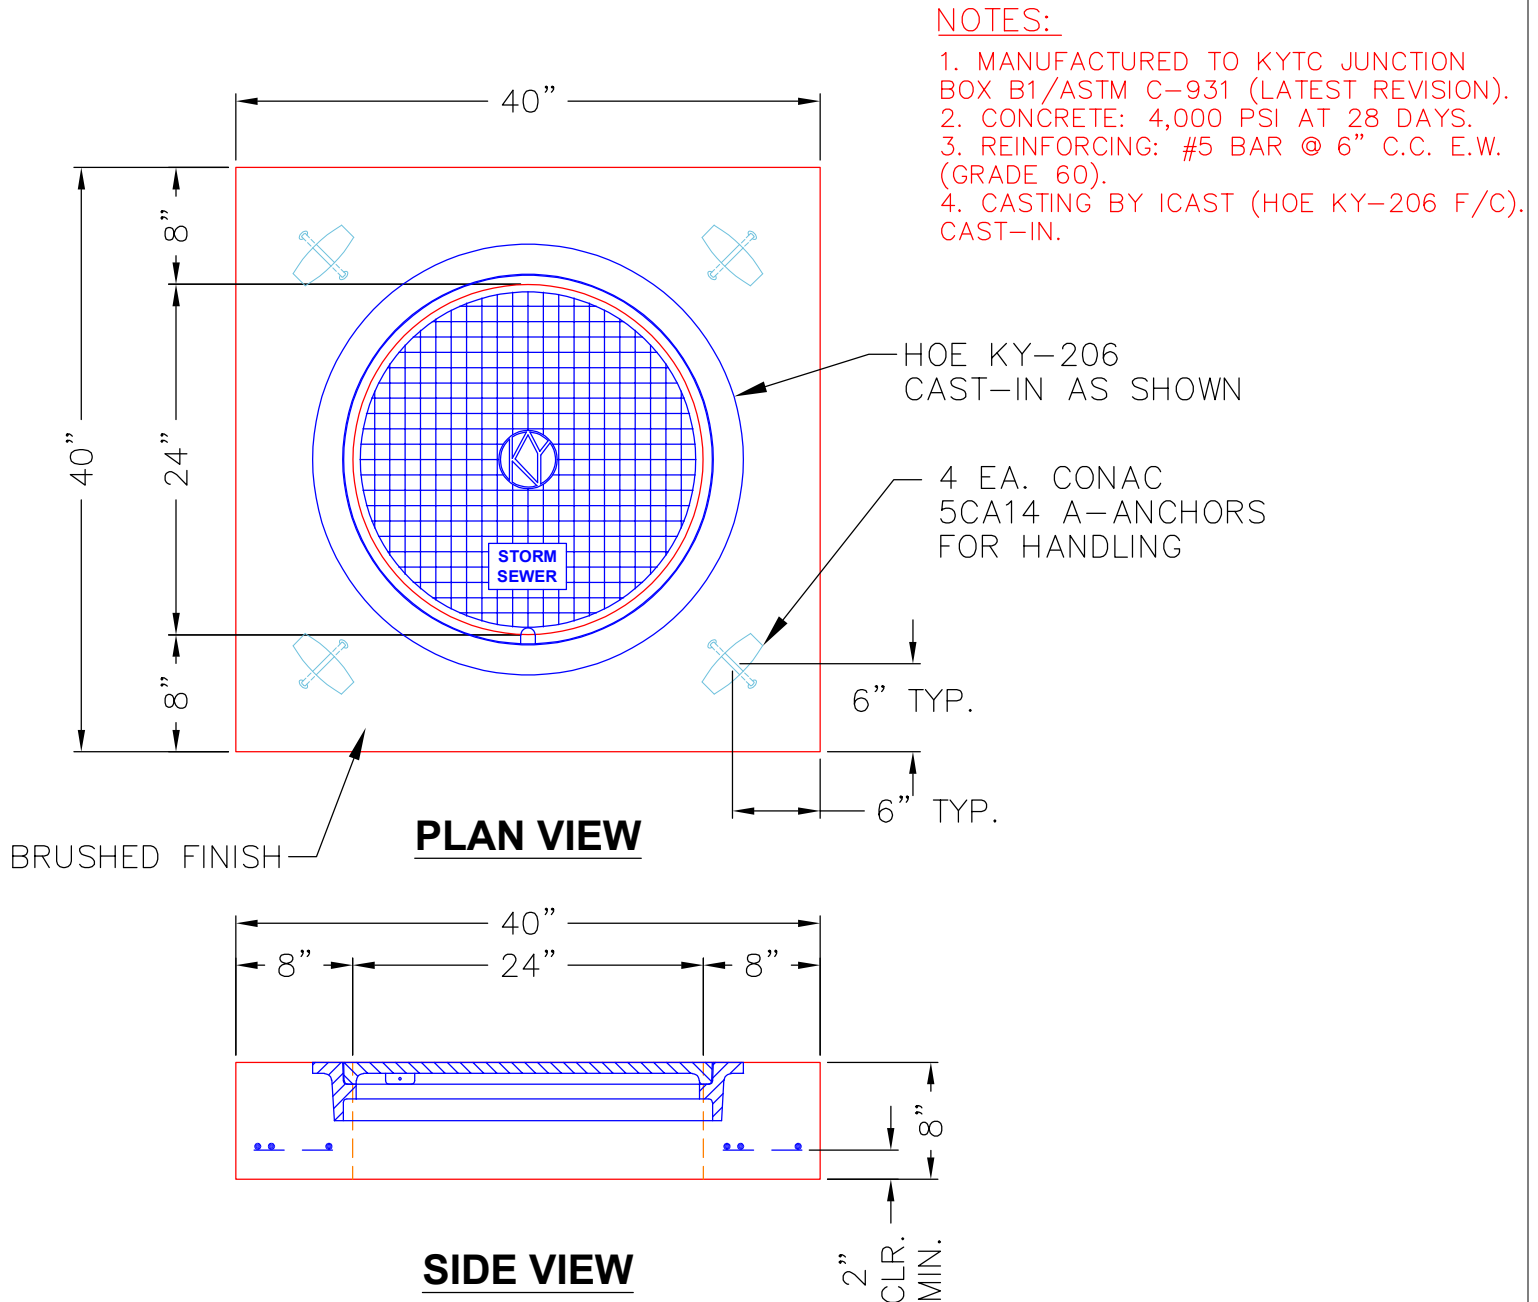

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 770 lb
Volume (Net): 0.2cu.yd