

Structure ID: 077 (JB 42in)

P1 BX3648-08BA48

BOX BASE 8inW, 8inF F/n

P2) 36" x 48" - CB FLAT TOP 8"W SOLID F/F - 8" P1) 36" x 48" - BOX BASE 8inW, 8inF F/n - 48" 1) 36" x 48" - Conseal CS-102 1.00" 2) Hole - 40 1) Hole - 18	2234 lb 6821 lb 0 lb 0 lb 0 lb ----- Structure Total: 9055 lb
--	---

Structure Notes:
 ** KYTC STATE PROJECT **
 1. PER KYTC JUNCTION BOX / ASTM C913 SPEC'S.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. NO STEPS & NO INVERT CHANNEL.
 4. SOLID TOP SLAB - NO CASTING.


REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. NO STEPS

Rim: 421.5' Rim to Invert: 4.78' Slack: 1.36" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	416.72'	270°	32"	30" RCP B WALL	37"	Hole 40	40"	40"	-3.5"	0"
Invert 2	416.76'	90°	32"	30" RCP B WALL	37"	Hole 40	40"	40"	-3"	0"
Invert 3	416.8'	180°	26"	15" CMP	16"	Hole 18	18"	18"	0.5"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

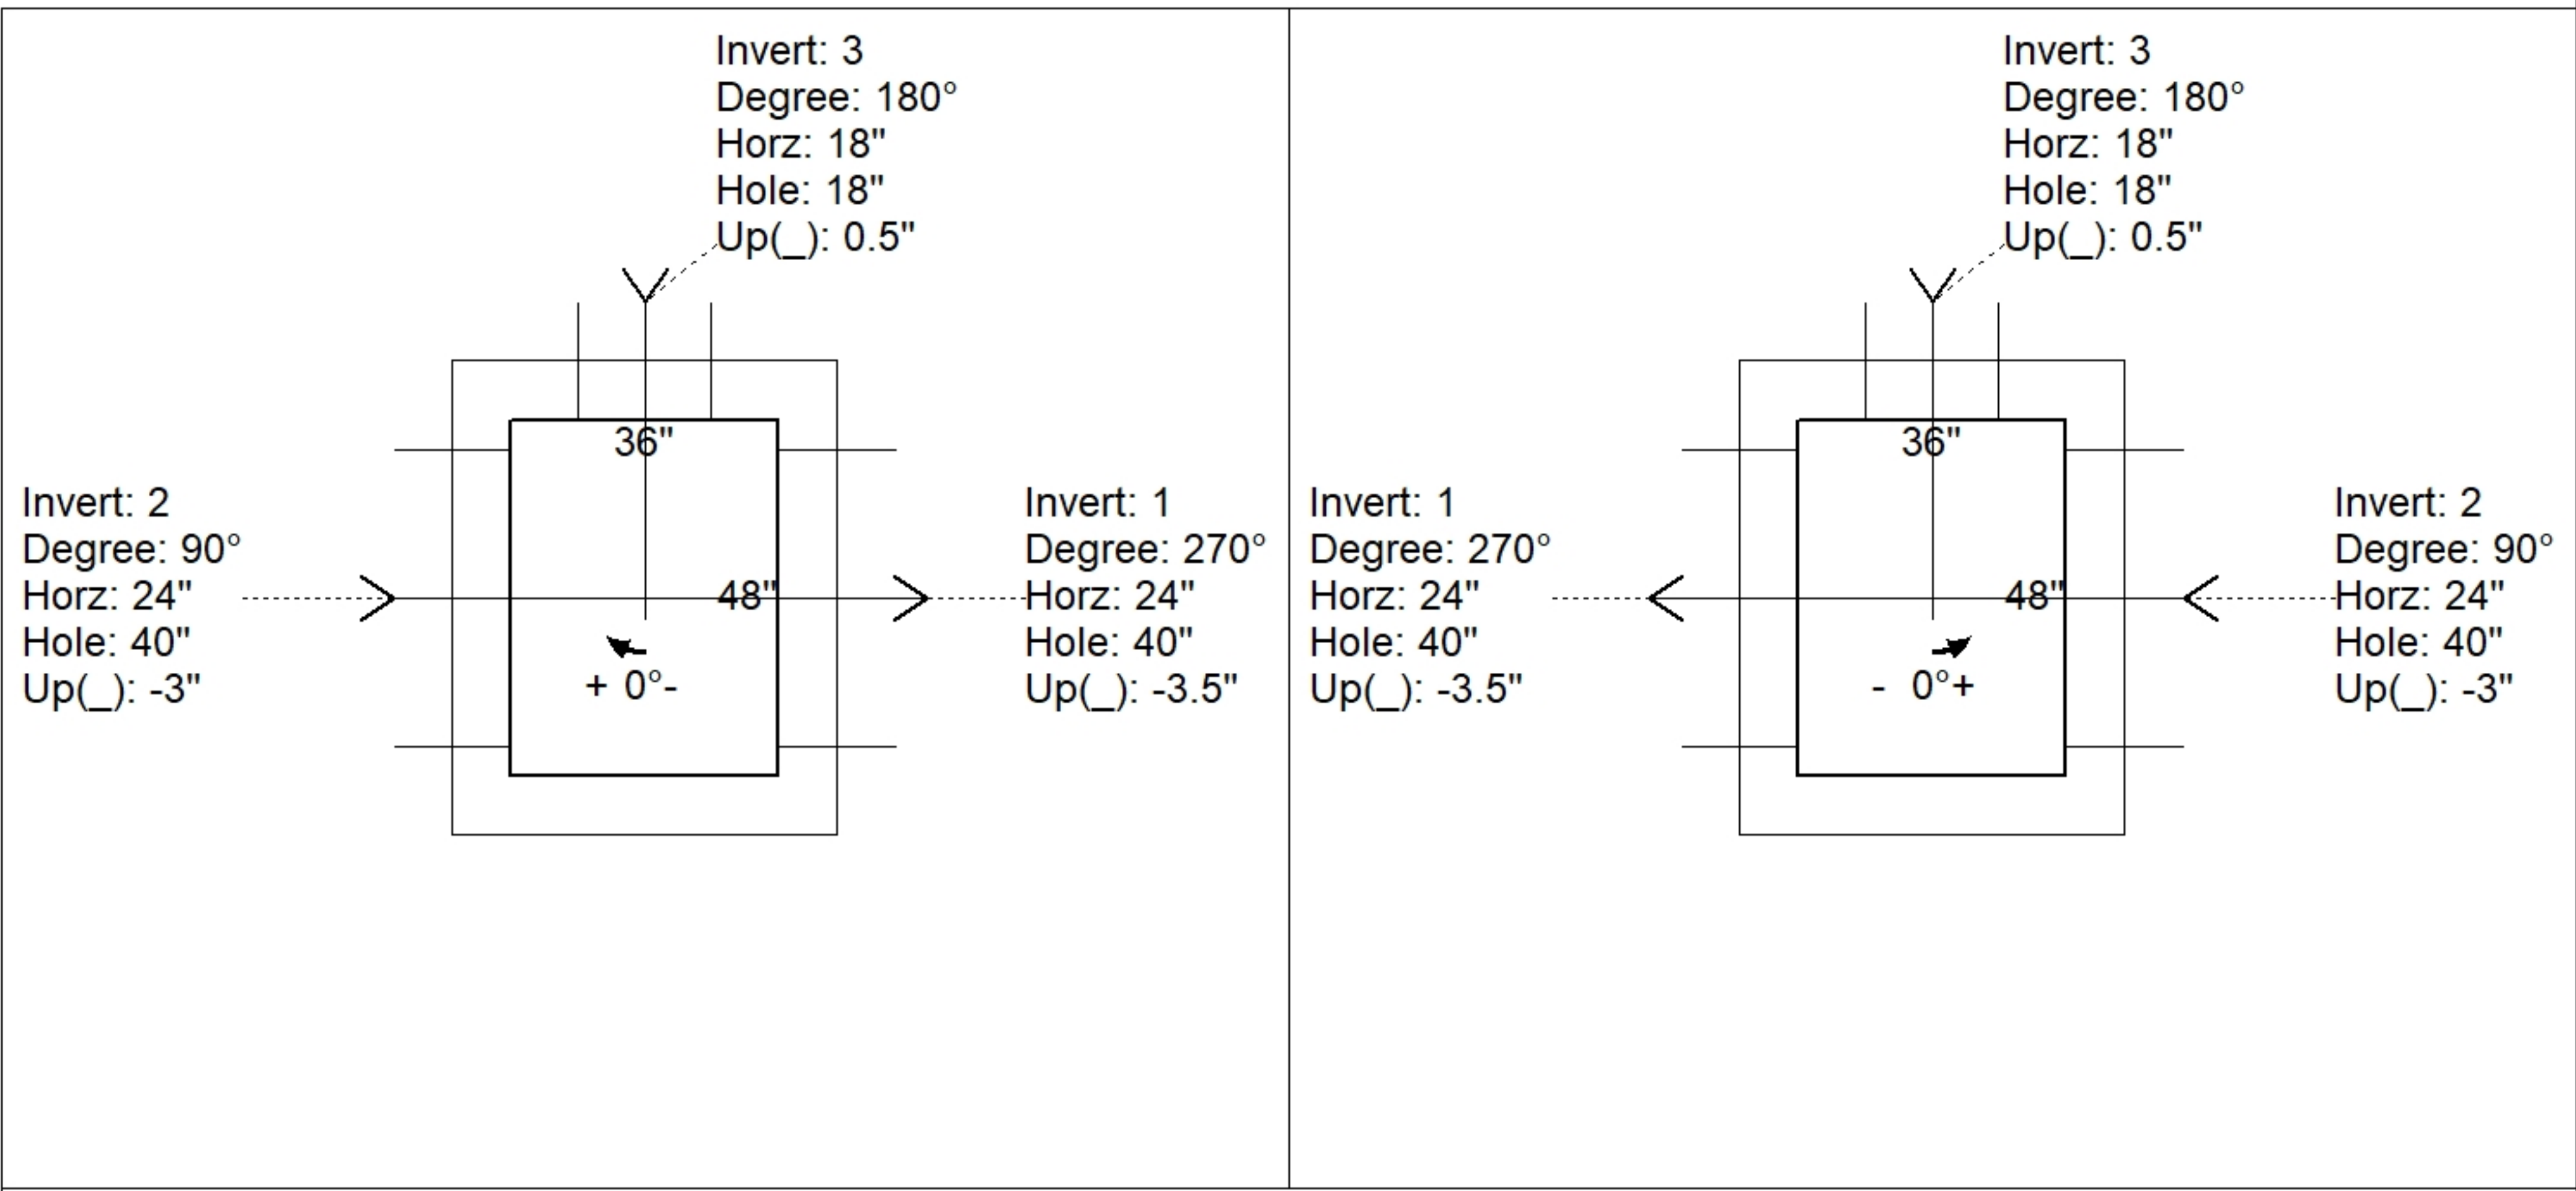

INSIDE WALL DIMENSIONS

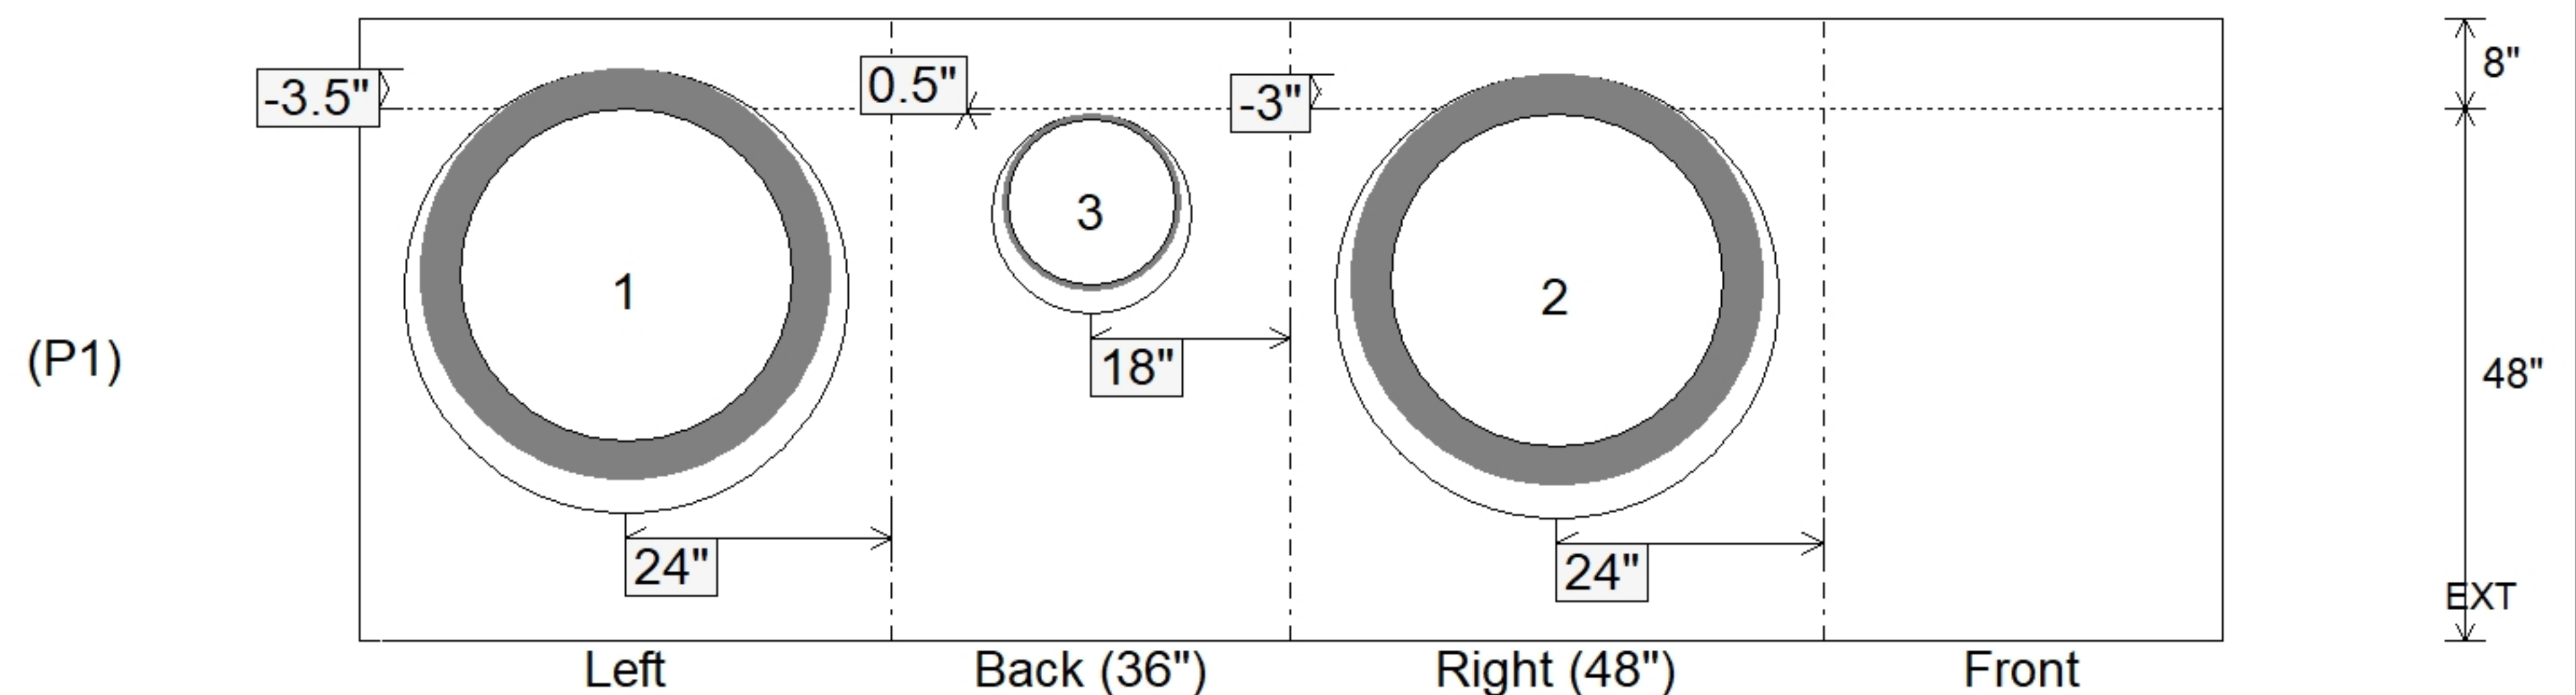

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 48" Height (Ext): 56"	Weight (Net): 6821 lb Volume (Net): 1.74cu.yd
----------------------------------	-------------------------------	--	--	--