

Structure ID: 096 (JB B7)

P2 BX3232-08R24 BOX RISER 8inW F/G

P4) CASTING (cast in) - 0 P3) 32" x 32" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8" P2) 32" x 32" - BOX RISER 8inW F/G - 24" P1) 32" x 32" - BOX BASE 8inW, 8inF, Variable Ht T/n - 50" 1) CASTING - HOE KY-206 F/C (KY TY1) 2) 32" x 32" - Con Seal CS-102 1.00" 1) Hole - 28 2) Hole - 22	0 lb 1243 lb 2578 lb 5993 lb 206 lb 0 lb 0 lb 0 lb	
Structure Total:	10020 lb	



Structure Notes:
 ** KYTC STATE PROJECT **
 1. PER KYTC JUNCTION BOX B / ASTM C913 SPEC'S.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. NO STEPS & NO INVERT CHANNEL.
 4. HOE KY-206 F/C - CAST INTO TOP SLAB.

REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 423.35' Rim to Invert: 6.85' Slack: 0.2" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

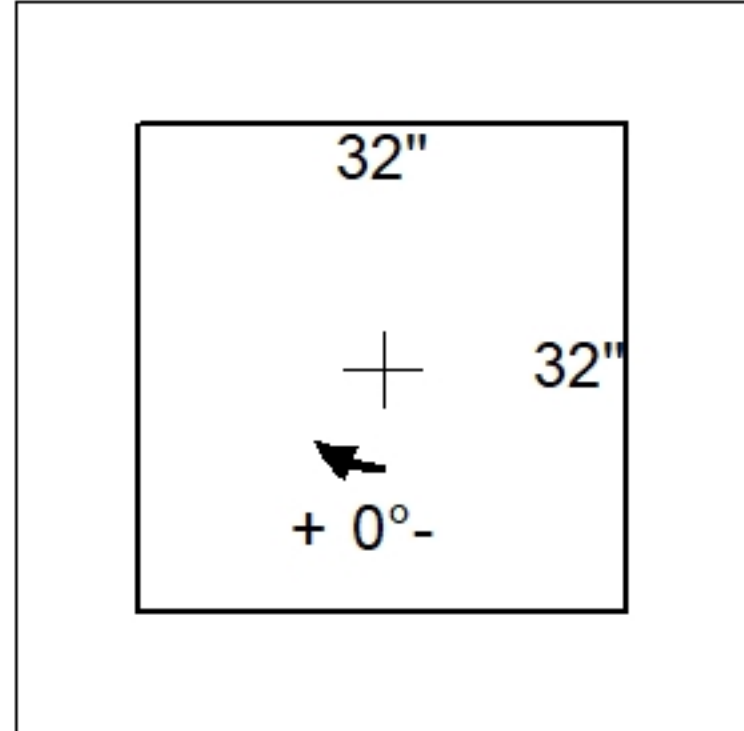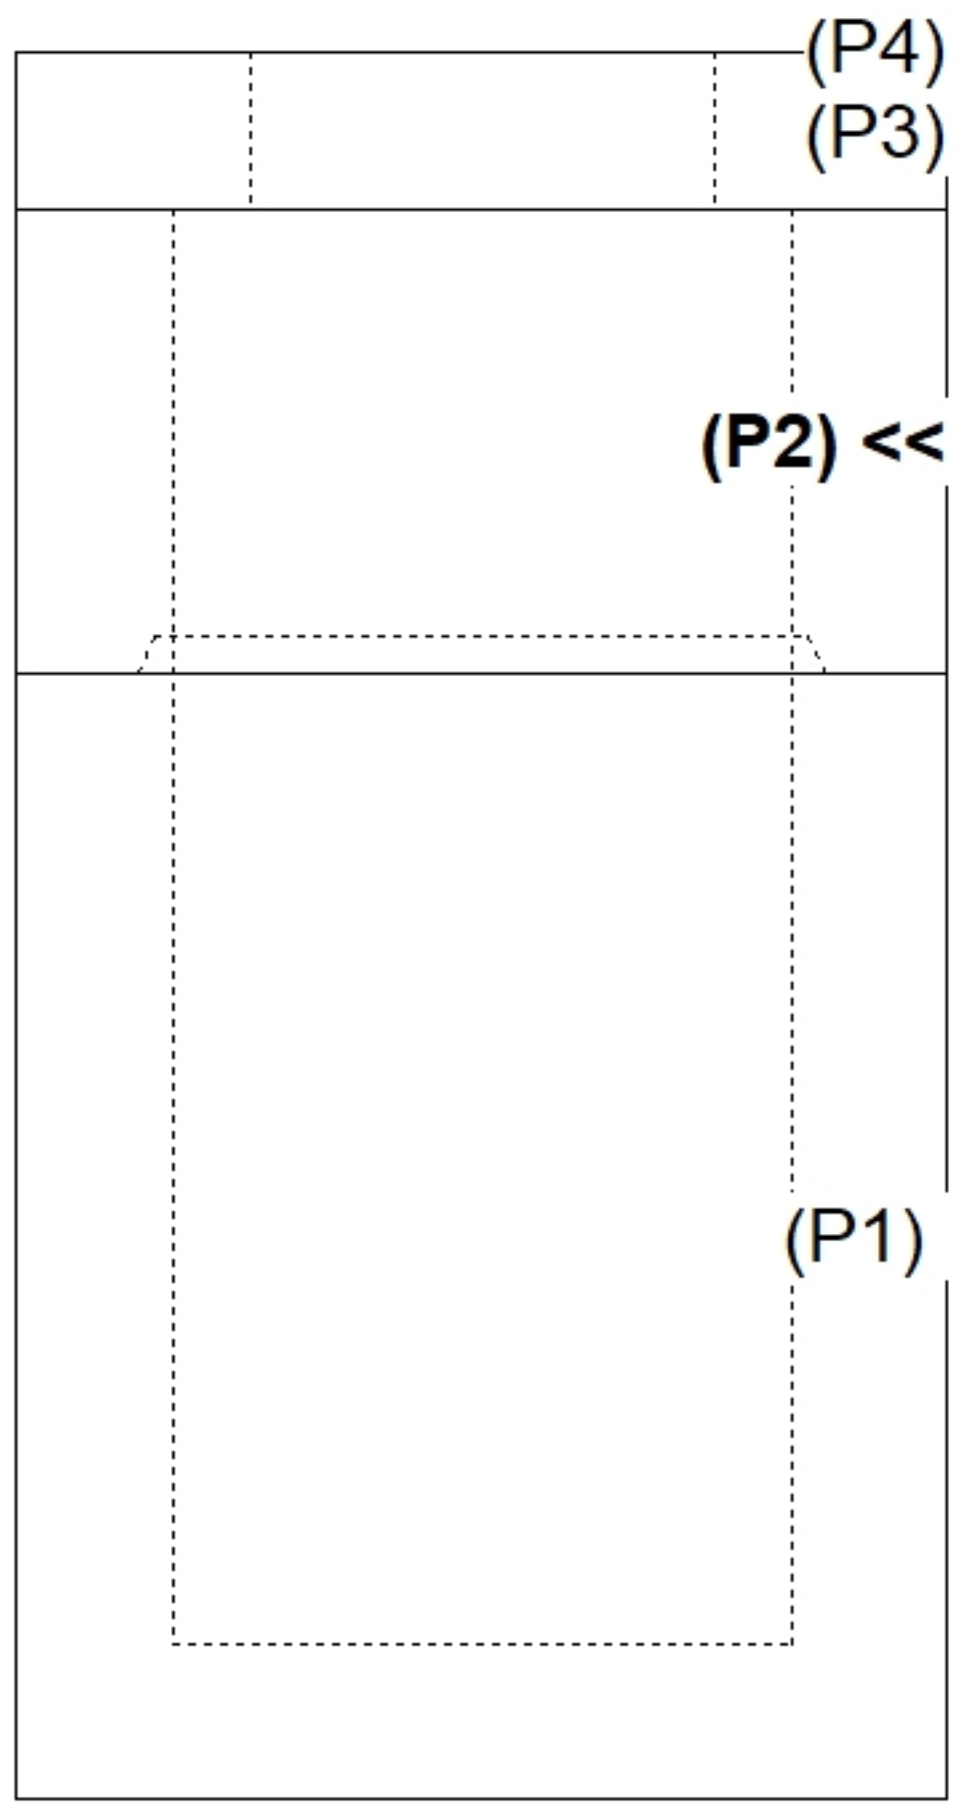

INSIDE WALL DIMENSIONS

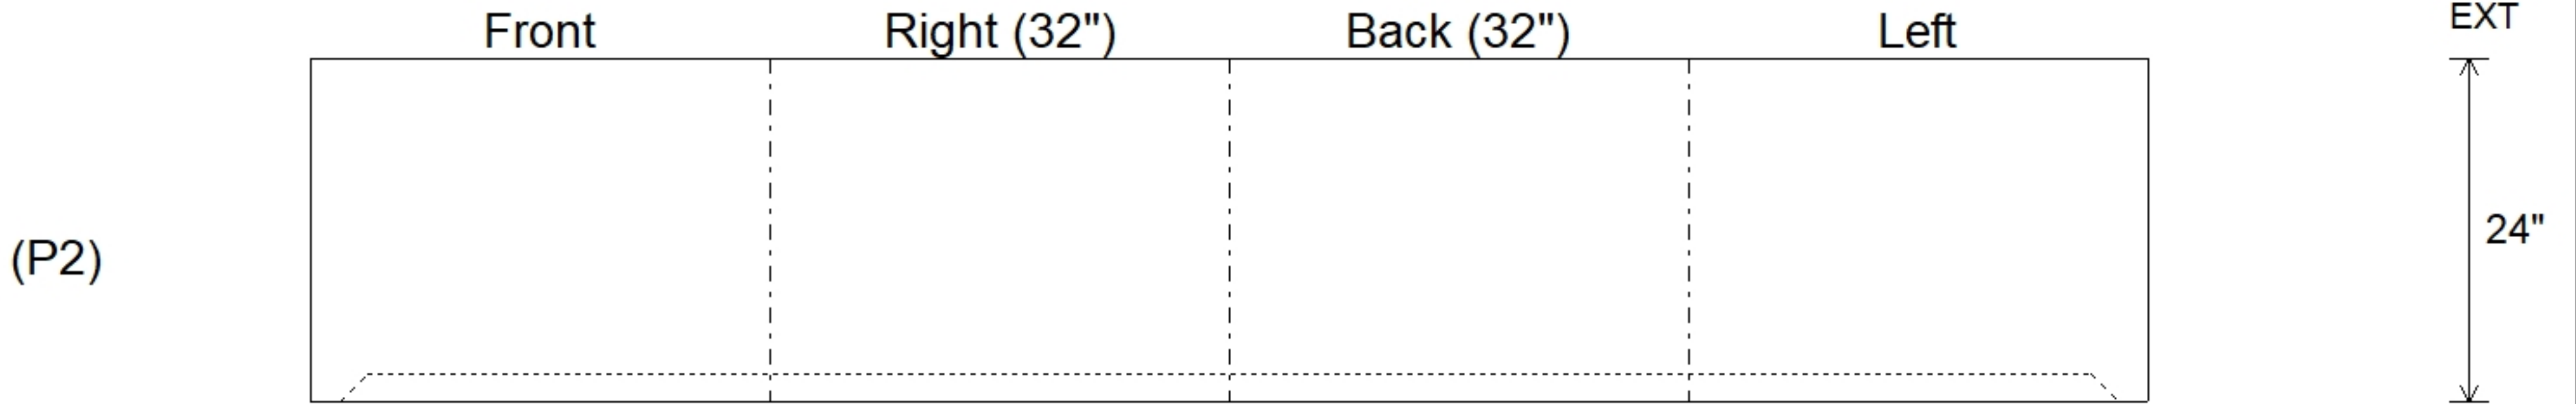

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 24" Height (Ext): 24"	Weight (Net): 2578 lb Volume (Net): 0.66cu.yd
----------------------------------	----------------------------------	--	--	--