

Job Name: 26-2484 Bass Pro Shops Outpost Paducah
Job Location: Paducah, KY
Contractor: Central Paving Co. of Paducah, Inc.

Plant: Beaver Dam
6/16/2026 8:03:48 AM

Tech: S. Felletter
PC: A. Chambers



Structure ID: Y8 ST-IN

P2 MH048LD12S

MH FLAT TOP w/34"x34" Hole F/G

P3) 34" x 34" - CASTING HEIGHT - 3"
P2) 48" - MH FLAT TOP w/34"x34" Hole F/G - 12"
P1) 48" - MH BASE T/n - 48"
1) CASTING - HOE 595 F/G
1) 48" - Conseal CS-102 1.00"
2) Hole - 24

0 lb
1194 lb
4289 lb
376 lb
0 lb
0 lb


Structure Total: 5859 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE 595 F/G).


REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

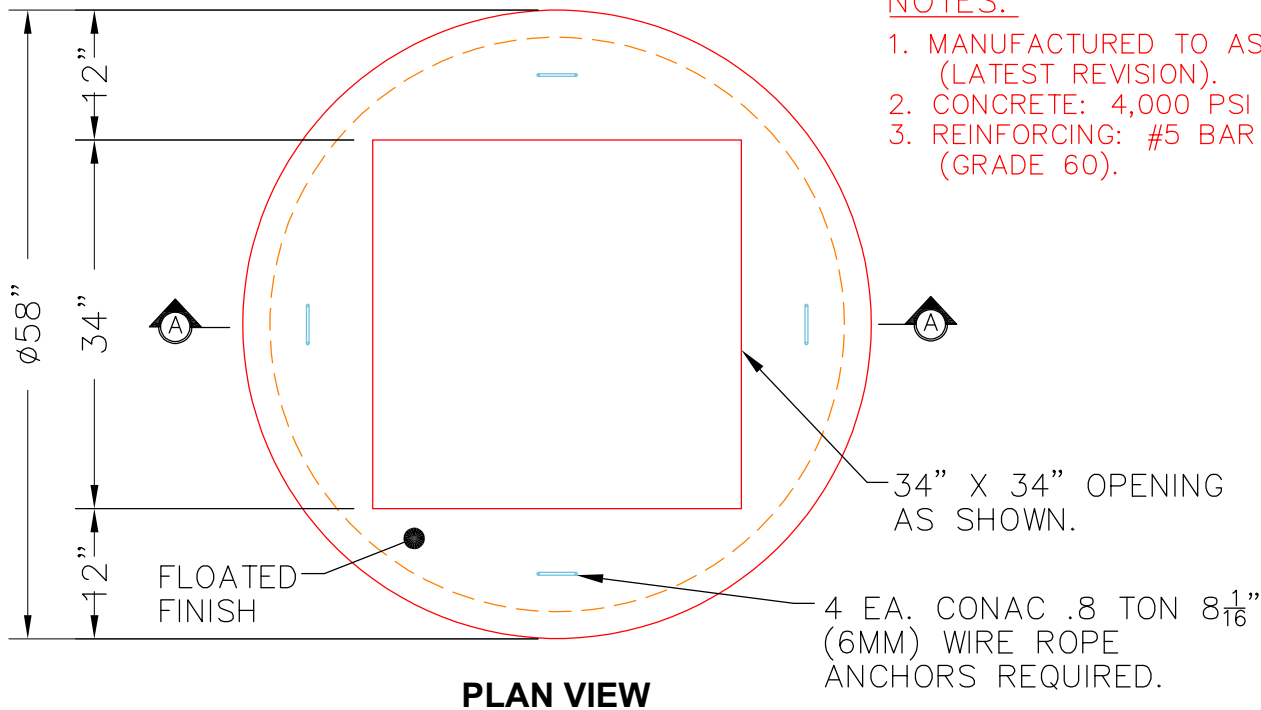

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).

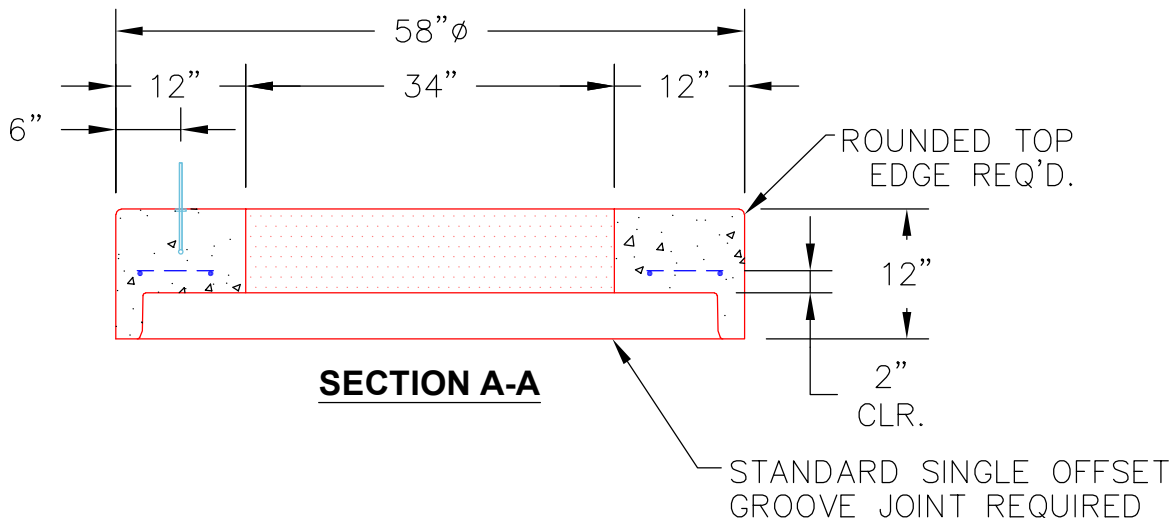

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1194 lb
Volume (Net): 0.3cu.yd