



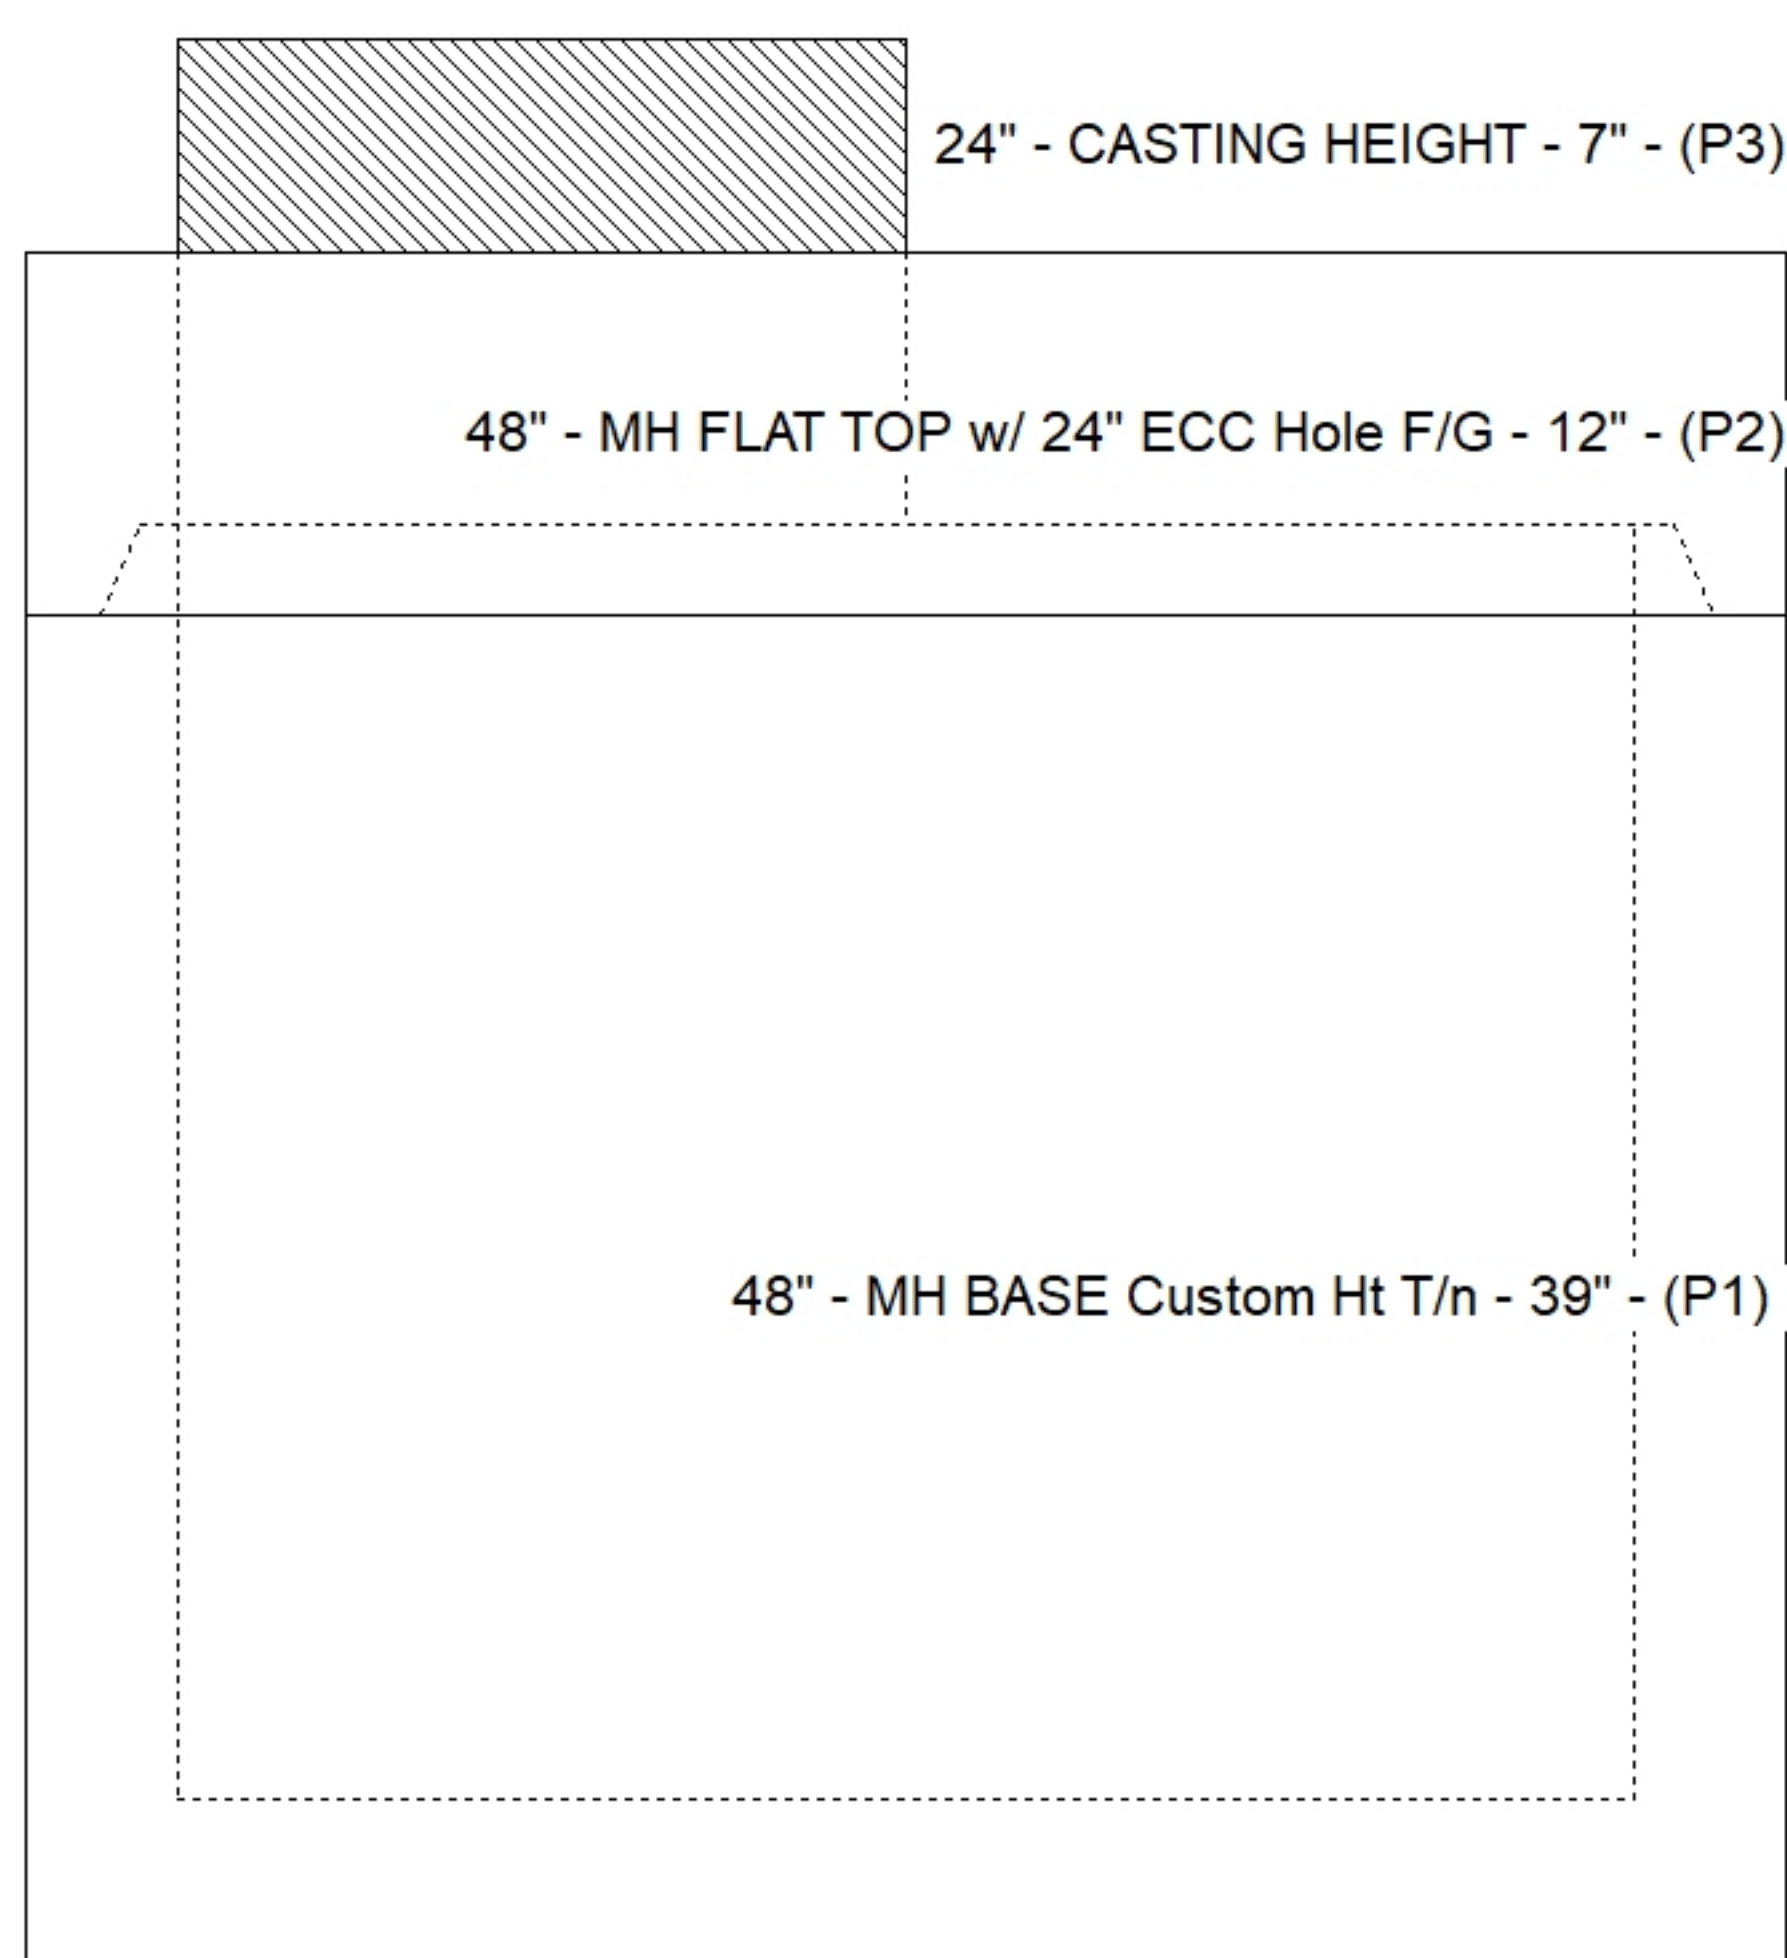


Floor (Bot): 408.53'
Overall Height: 5.333'
Slack: 0.2"

P3) 24" - CASTING HEIGHT - 7"	0 lb
P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12"	1561 lb
P1) 48" - MH BASE Custom Ht T/n - 39"	3789 lb
1) 48" - STORM INVERT CHANNEL - 1/4 HEIGHT	1075 lb
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212	0 lb
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)	0 lb
1) Chimney Seal - Trelleborg FlexRib Chimney Seal	10 lb
1) CASTING - HOE WT-420-MSD F/C Storm	340 lb
1) 48" - Conseal CS-102 1.00" (Double)	0 lb
1) 24" - Conseal CS-102 1.00" (Double)	0 lb
2) PSX - 18M DD	16 lb
1) PSX - 12-06 NYLO	8 lb
3) MH Step ML-10-TDS-NCR - 10"	0 lb
Structure Total:	6799 lb

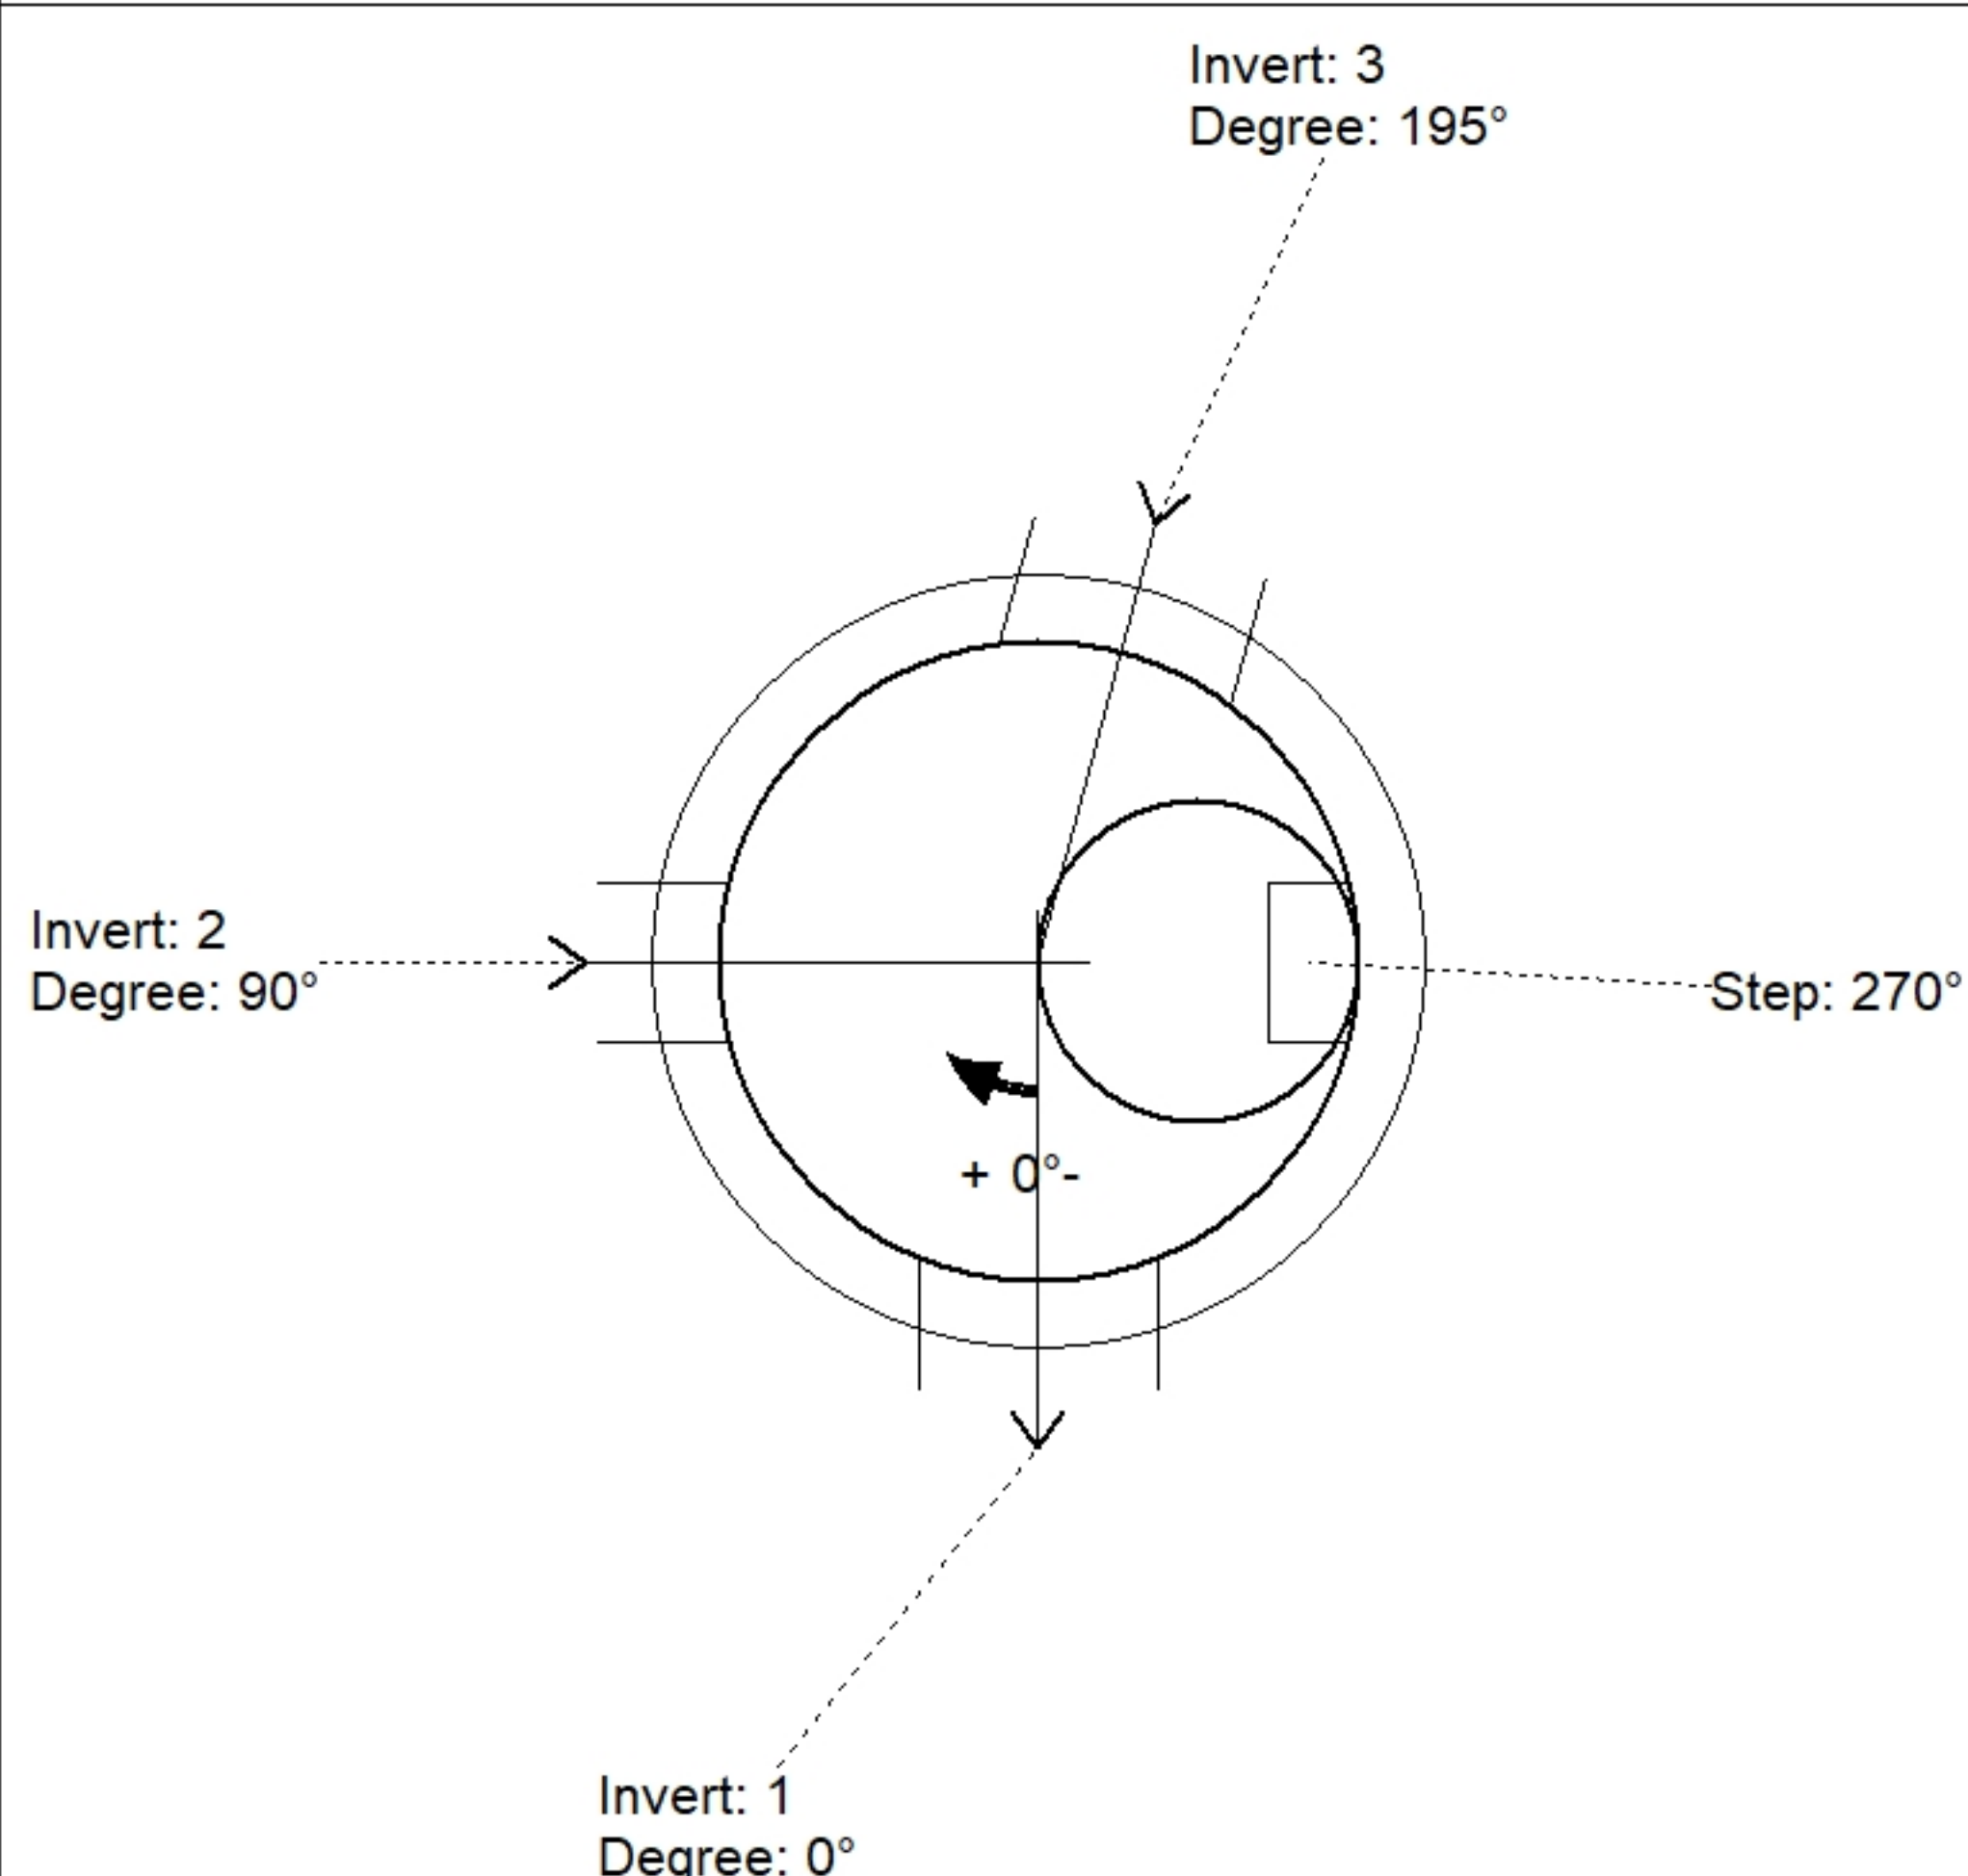

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	413.88'							
Reducer								
Invert 1	409.28'	0°	15" PVC SDR35	15.3"	18"	PSX 18M DD	1.5"	P1
Invert 2	410.5'	90°	6" PVC SDR35	6.25"	12"	PSX 12-06 NYLO	14.64"	P1
Invert 3	409.28'	195°	15" PVC SDR35	15.3"	18"	PSX 18M DD	1.5"	P1
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

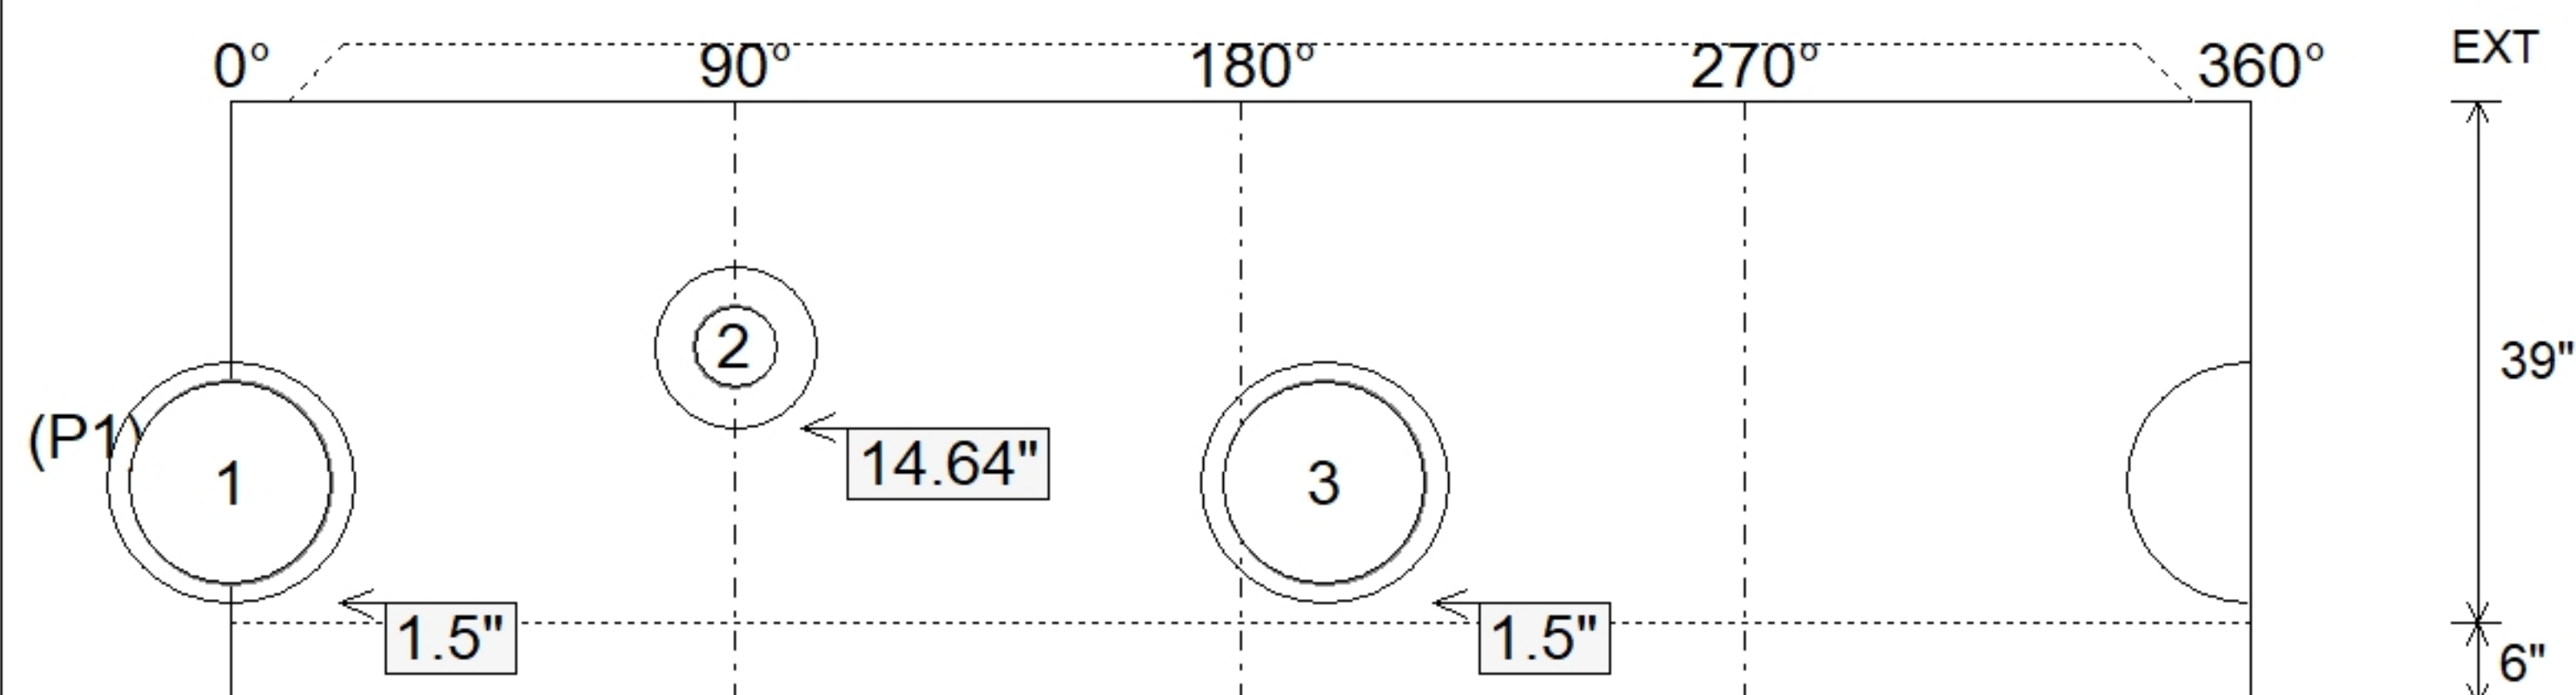

SUBMITTAL
APPROVED BY: