

Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315)	Plant: 100	Tech: J. Horsley - A	
Job Location: Indiana, KY Contractor: Louisville Paving and Construction	5/12/2026 1:01:11 PM	PC: J. Jarvis	

**Structure ID: 140**

**P2 BX1818-06RVF**

**BOX RISER 6inW, Variable Ht F/G**



P3) 18" x 18" - CASTING HEIGHT - 4"	0 lb
P2) 18" x 18" - BOX RISER 6inW, Variable Ht F/G - 12"	580 lb
P1) 18" x 18" - BOX BASE 6inW, 6inF, Variable Ht T/n - 20"	1319 lb
2) 18" x 18" - Conseal CS-102 1.00"	0 lb
1) Hole - 16	0 lb
<b>Structure Total:</b>	<b>1899 lb</b>

- Structure Notes:
1. PER MSD YARD DRAIN / ASTM C-913 SPECS
  2. CONCRETE: 4,000 PSI AT 28 DAYS
  3. REINFORCEMENT: #4 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
  4. NO STEPS
  5. HOE 165-A FRAME & GRATE SUPPLIED BY OTHERS


Rim: 565.95'    Rim to Invert: 3'    Slack: 0"    Sump: 0"    Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

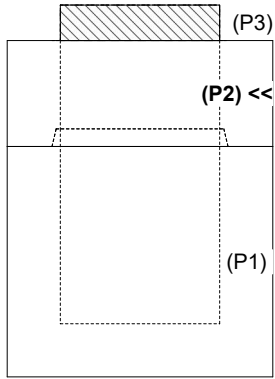

**INSIDE WALL DIMENSIONS**

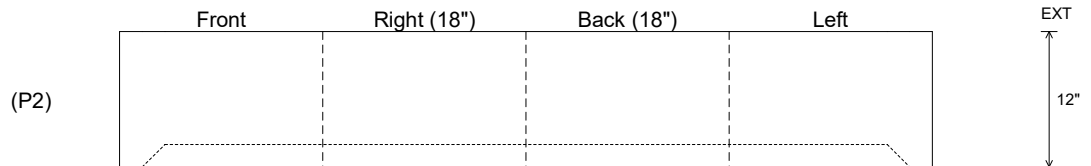

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 6" Floor Height: 0"	Height (Int): 12" Height (Ext): 12"	Weight (Net): 580 lb Volume (Net): 0.15cu.yd
----------------------------------	----------------------------------	--	--	---