




Structure ID: St. 43+62 HW (2)

P1 HWCUSTOM


96" x 72" - BOX CULVERT HEADWALL F/F

GENERAL NOTES:


- DRAWING TO BE USED IN CONJUNCTION WITH KYTC STANDARD DRAWINGS RDH-1005-02, RDH-1105-02, RDH-1200-02, & RDH-1302-03
- REINFORCEMENT PER KYTC STANDARD DRAWINGS RDH-1005-02, RDH-1200-02, & RDH-1302-03 - 2" MIN. REBAR CLEARANCE (TYP)
- CONCRETE: 5,000 PSI AT 28 DAYS
- WEIGHT: 40,775 LBS
- HEADWALLS LOCATED AT SHOULDER EDGE SHALL BE PARALLEL TO CENTERLINE OF ROADWAY
- PAVING SHALL BE REQUIRED & SHALL BE SLOPED IN DIRECTION OF FLOW EQUAL TO SLOPE OF BOX. FRONT FACE OF HEADWALL & ENDS OF WINGS SHALL REMAIN VERTICAL.

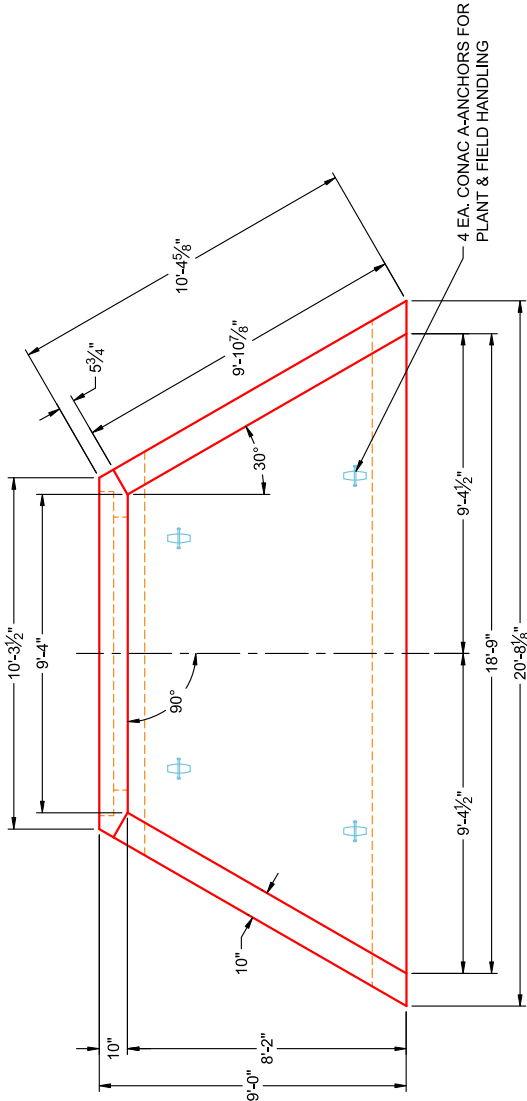

PLAN VIEW

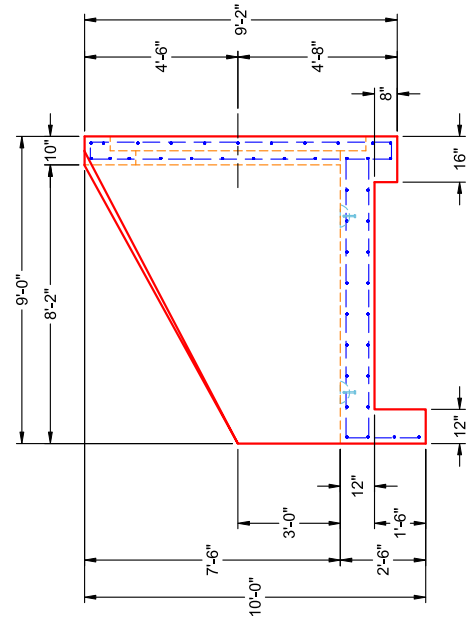

SIDE VIEW

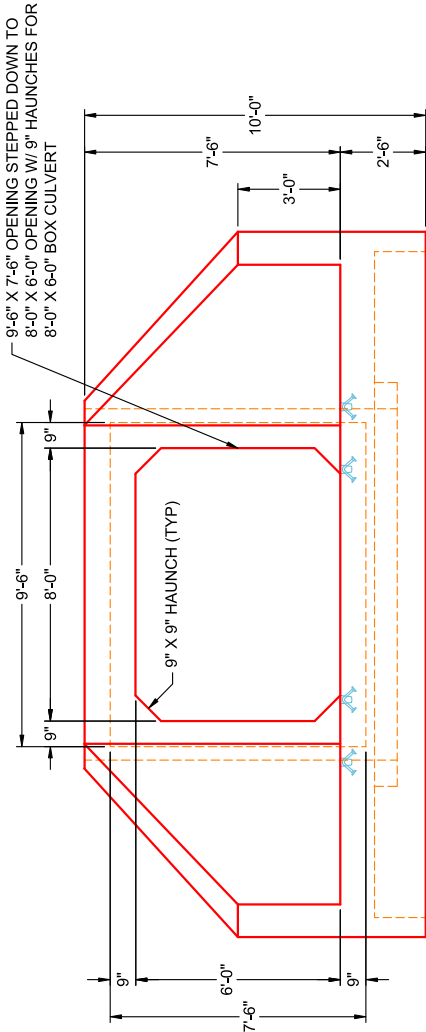

FRONT VIEW

REVISION INFORMATION

REV. DATE: NO REVISIONS TO DATE

SUBMITTAL DRAWING:

8'-0" X 6'-0" BOX CULVERT HEADWALL - 0° SKEW

CUSTOMER: JIM SMITH CONTRACTING

PROJECT: KYTC MCCracken CO. CALL 200 (ID 241301)

STRUCTURE: ST. 43+62 HW (2)

QUOTE/SALES ORDER NO: 24-1643B

CHECKED BY: B. SMITH

DATE: 05/28/26

SCALE: NTS

PG. 1 OF 1



GENERAL NOTES:

1. PER SECTION 605 OF KYTC STANDARD SPECS FOR ROAD & BRIDGE CONSTRUCTION
 - KYTC STAMP REQUIRED
 - WEEP HOLES REQUIRED

-
- 9' X 9' HAUNCH (TYP)
- Ø4" WEEP HOLES REQUIRED ON BOTH SIDES OF CULVERT
- 10' COVER
- 8"
- 6'-0" RISE
- 7'-4"
- 8"
- 8"
- 8'-0" SPAN
- 9'-4"

NTS



THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.