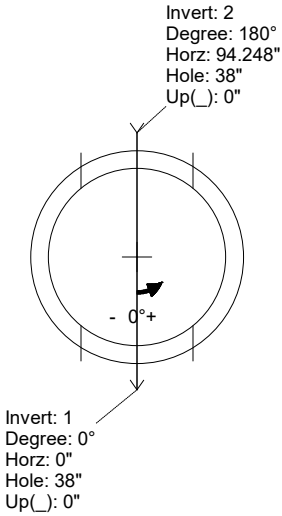
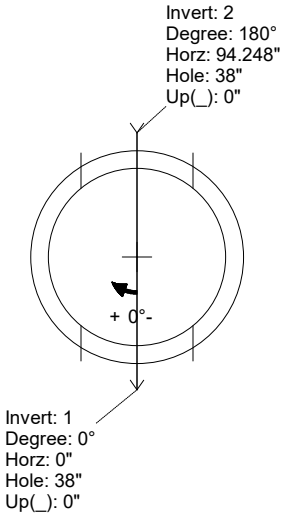

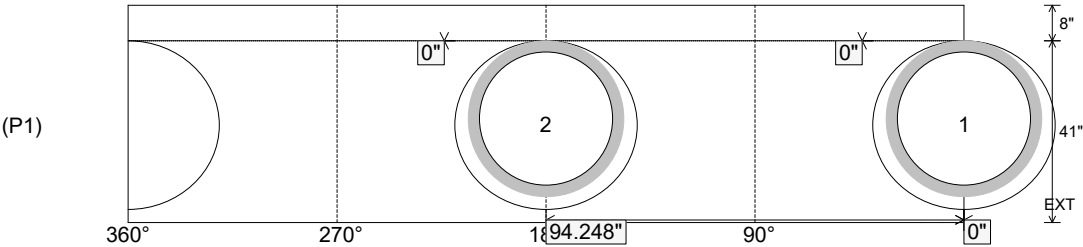


Job Name: 25-3241P2 - Buck Hills Subdivision Job Location: Lawrenceburg, KY 40342 Contractor: Edmonson Plumbing & Heating Supply					Plant: 100 7/24/2026 12:43:50 PM		Tech: Jared - A PC: C. Goff				
Structure ID: CB 4											
P1 MH060BAVF		MH BASE Custom Ht									
P3) 24" x 36" - CASTING HEIGHT - 6" P2) 60" - MH FLAT TOP w/24"x36" Hole - 8" P1) 60" - MH BASE Custom Ht - 41" 1) CASTING - HOE 525 LV SET (F/G/H) 1) 60" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 38						0 lb 2153 lb 5793 lb 442 lb 0 lb 0 lb 0 lb ----- 8389 lb		Structure Notes: 1. HOE 525 LV SET (F/G/H) PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.			
Rim: 806.82' Rim to Invert: 4.5' Slack: 1.55" Sump: 2.55" Step Position: 90°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	802.32'	0°	0"	30" HDPE	35.1"	Hole 38	38"	41.151"	0"	0"	
Invert 2	802.32'	180°	113.097"	30" HDPE	35.1"	Hole 38	38"	41.151"	0"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions)   INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 6" Floor Height: 8"		Height (Int): 41" Height (Ext): 49"		Weight (Net): 5793 lb Volume (Net): 1.48cu.yd		