

Job Name: 26-1230 - Wheelwright WWTP & LS Improvements
Job Location: Wheelwright, KY
Contractor: Endesol, Inc.

Plant: 100

5/6/2026 5:07:52 PM

Tech: Jared - F
PC: E. Bradley



Structure ID: WW Top

P1 MH072LD15S

MH FLAT TOP w/30"x48" Hatch F/G

- P2) 30" x 48" - HATCH (CAST FLUSH) - 3"
P1) 72" - MH FLAT TOP w/30"x48" Hatch F/G - 15"
1) JOINT WRAP - 12" WD x 072" MAC WRAP
1) 30" x 48" - Conseal CS-231 1.00" (Double)

Structure Total:


100 lb
4186 lb
0 lb
0 lb

4286 lb


Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. HATCH SUPPLIED BY ICAST (HALLIDAY W1S 30"x48").

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .31) #5 BARS AT 6" C.C.E.W.

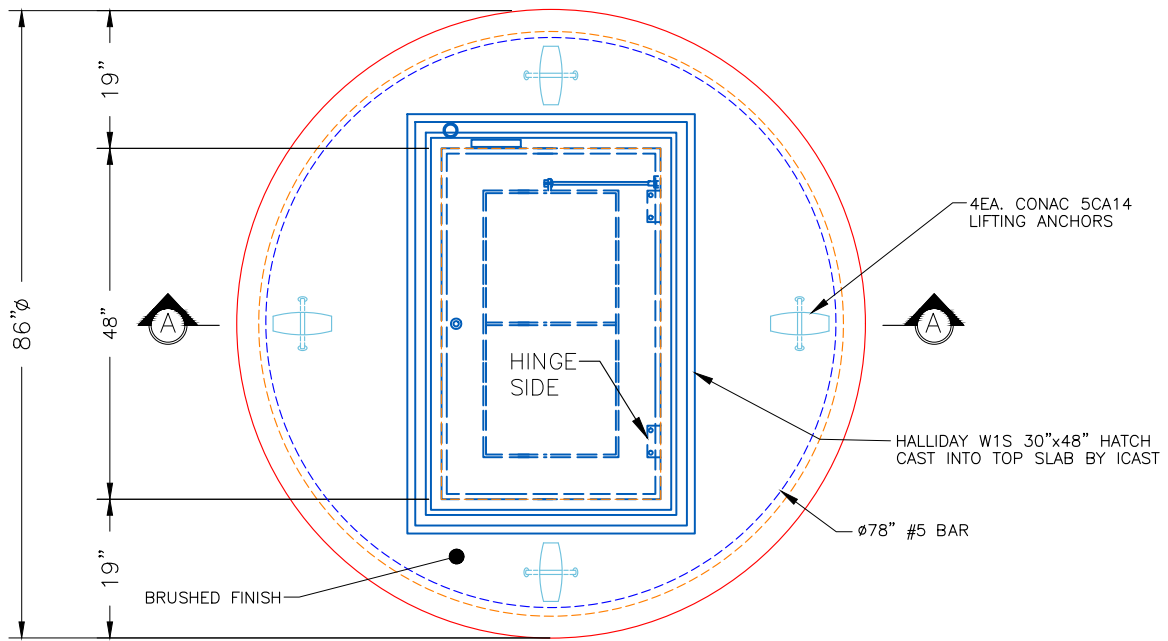

PLAN VIEW

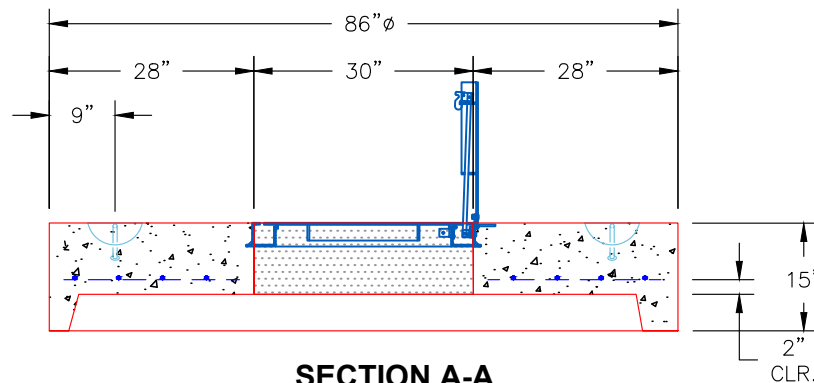

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 7"

Height (Ext): 15"

Weight (Net): 4186 lb
Volume (Net): 1.07cu.yd