



NOTES:


1. MANUFACTURED PER ASTM C913 SPECIFICATIONS.
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. JOINT SEALANT: 1" BUTYL CS-102.
4. REINFORCING PER ASTM A615 (GRADE 60).
FOOTER (As .62) #5 BARS AT 7" C.C.E.W. (DBL MAT)
5. WEIGHT:
FOOTER 1.....1,269 LBS.
FOOTER 2.....1,269 LBS.

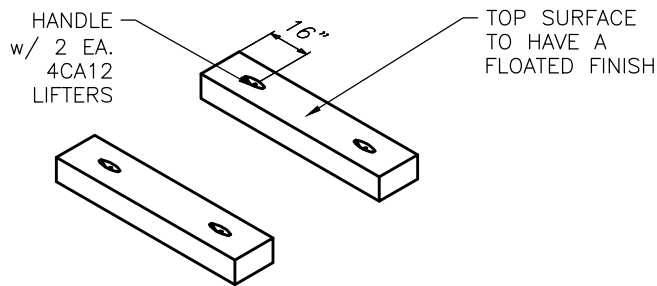


84"x18"x10" FOOTERS
2 EA.

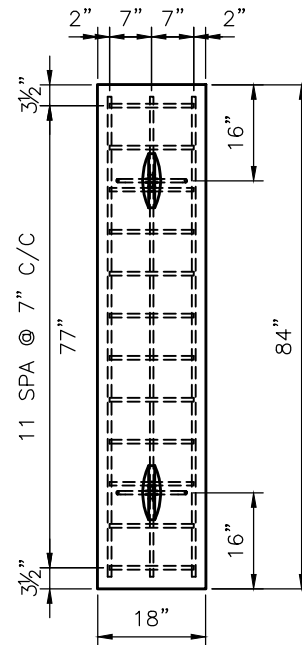

TOP VIEW

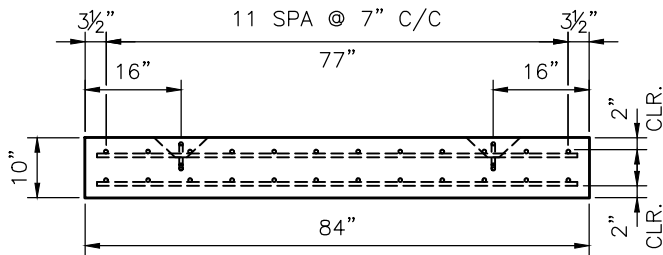


SIDE VIEW



FRONT VIEW

GVV 06 - 85+84 E. KENTUCKY ST.

PRODUCTION WORK ORDER		PRODUCT I.D.: BLKSTM	DESCRIPTION: FOOTER 84"L x 18"W x 10"H (2 EA.)		
	QUALITY CONTROL CHECKLIST <input type="checkbox"/> ALL DIMENSIONS CORRECT. <input type="checkbox"/> LIFTERS INSTALLED. <input type="checkbox"/> OPENING CENTERED. <input type="checkbox"/> REINFORCING CORRECT. <input type="checkbox"/> SURFACE QUALITY ACCEPTABLE. <input type="checkbox"/> EDGES CHAMFERED. <input type="checkbox"/> ALL PATCHWORK ACCEPTABLE.	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: GARNEY COMPANIES, INC.		
		PLANT: BEAVER DAM, KY.	PROJECT: KY OAK GLENMARY 48" MAIN REHAB PH.2		
		WEIGHT: 1,269 LBS.	STRUCTURE: GVV 06 P5		
		TOP SECTION JOINT: N/A	ORDER NO: 24-2570		
		BASE SECTION JOINT: N/A	PC: A. CHAMBERS	DRAWING: M. BILITER	
		QC CHECK INITIALS:	DATE: 02/25/25	SCALE: NTS	PG. 1 of 1