

Structure ID: A5

P2 MH072RS30

MH RISER T/G



P4) 28" x 28" - CASTING HEIGHT - 7.50" P3) 72" - MH FLAT TOP w/28"x28" Hole F/G - 15" P2) 72" - MH RISER T/G - 30" P1) 72" - MH BASE T/n - 60" 2) 72" - Conseal CS-102 1.00" 1) 28" x 28" - Conseal CS-102 1.00" 1) Hole - 48 1) Hole - 58 x 42 8) MH Step ML-10-TDS-NCR - 10"	0 lb 6325 lb 4373 lb 10231 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 20929 lb	Structure Notes: 1. PER ASTM C-478 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS AT 90 DEGREES 5. CASTING: JBS 3300-V SUPPLIED BY OTHERS
--	---	---

Structure Total: 20929 lb


Rim: 539.65' Rim to Invert: 9.09' Slack: 1.08" Sump: 4.5" Step Position: 90°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

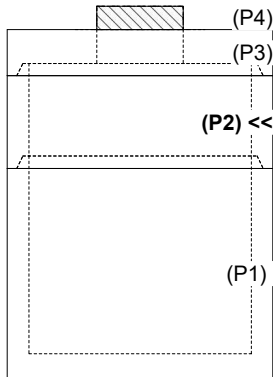

INSIDE WALL DIMENSIONS

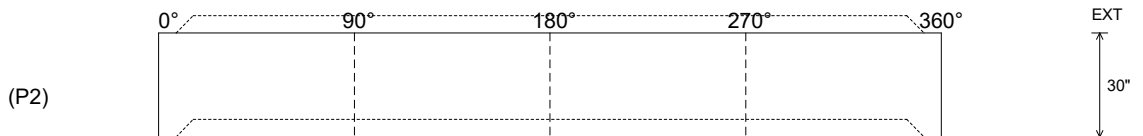

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 7" Floor Height: 0"	Height (Int): 30" Height (Ext): 30"	Weight (Net): 4373 lb Volume (Net): 1.12cu.yd
----------------------------------	------------------------------------	--	--	--