

Structure ID: B1

P2 MH048RS48

MH RISER T/G



P5) 24" - CASTING HEIGHT - 7" P4) 24" - GRADE RING F/F - 4" P3) 48" - ECC CONE w/ 24" HOLE F/G - 36" P2) 48" - MH RISER T/G - 48" P1) 48" - MH BASE T/n - 36" 2) 48" - Conseal CS-102 1.00" 2) Hole - 26 10) MH Step ML-10-TDS-NCR - 10"	0 lb 270 lb 3000 lb 3353 lb 3379 lb 0 lb 0 lb 0 lb ----- 10002 lb	Structure Notes: 1. PER ASTM C-478 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS AT 238 DEGREES 5. CASTING: JBS 1150 "STORM" SUPPLIED BY OTHERS
---	--	--

Structure Total: 10002 lb


Rim: 554.81' Rim to Invert: 10.81' Slack: 1.22" Sump: 2.5" Step Position: 238

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

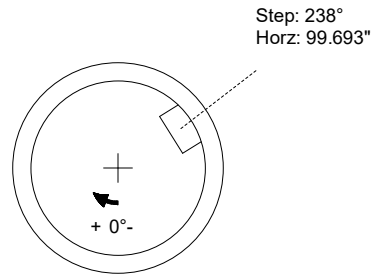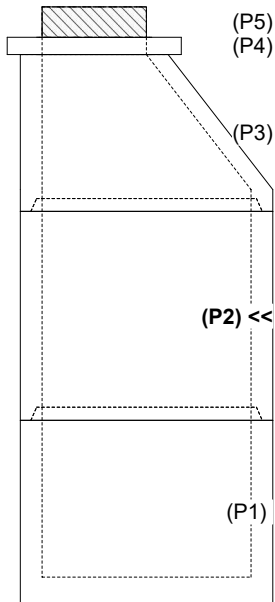

INSIDE WALL DIMENSIONS

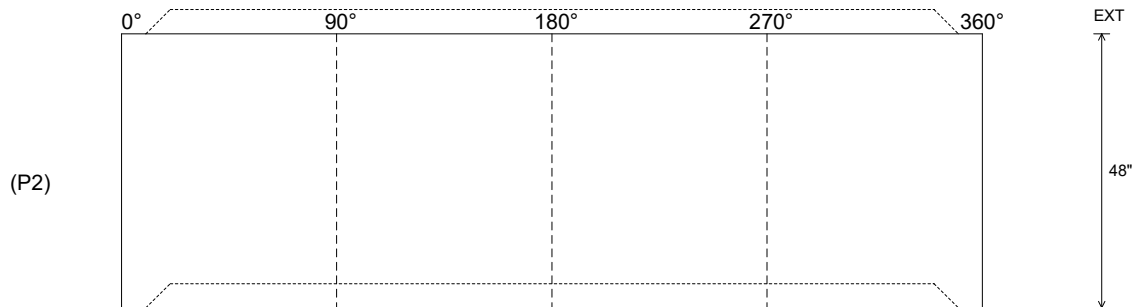

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"	Weight (Net): 3353 lb Volume (Net): 0.86cu.yd
----------------------------------	------------------------------------	--	--	--