
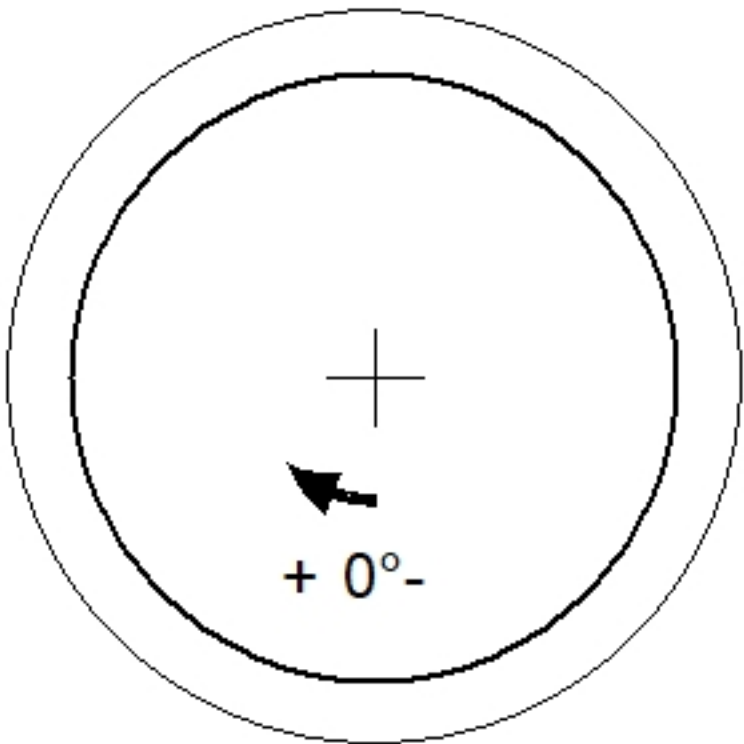


Job Name: 26-2920 853382 Urgent Care Job Location: Radcliff, KY Contractor: Contech Engineering Solutions					Plant: Beaver Dam 7/14/2026 11:05:21 AM		Tech: S. Felletter PC: C. Goff						
Structure ID: 10-CS-4													
P1		MH048BA18			MH BASE T/n								
P5) 30" - CASTING HEIGHT - 4" P4) 48" - MH FLAT LID w/30in ECC Hole F/G - 12" P3) 48" - MH RISER T/G - 24" P2) 48" - MH RISER T/G - 72" P1) 48" - MH BASE T/n - 18" 1) ASSEMBLY REQUIRED 1) CVSTENCILING 3) 48" - Conseal CS-102 1.00" 2) Hole - 16						0 lb 1413 lb 1677 lb 4845 lb 2588 lb 0 lb 0 lb 0 lb 0 lb ----- 10522 lb		Structure Notes: 4" CASTING BY OTHERS . LIFTNG ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE . ICAST TO INSTALL THE INTERNALS . CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE					
Rim: 729'		Rim to Invert: 7.66'		Slack: 12.92"		Sump: 51"		Step Position:					
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset			
Invert 1													
Invert 2													
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													
(P5) (P4) (P3) (P2) (P1) << RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions) 													

INSIDE WALL DIMENSIONS

(P1)

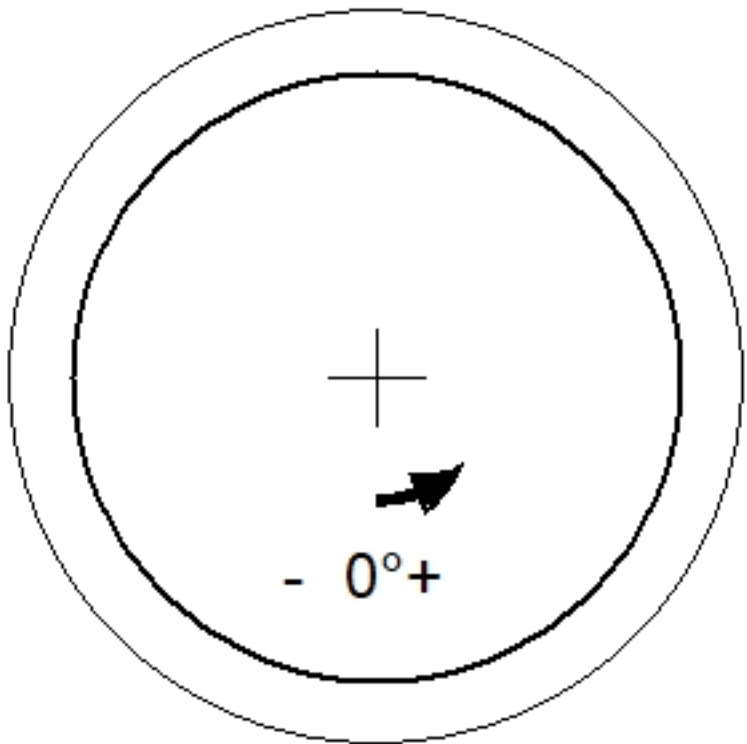