

Structure ID: F4

P2 MH048RS48

MH RISER T/G



P4) 24" - CASTING HEIGHT - 7" P3) 48" - MH FLAT LID w/24in ECC Hole F/G - 12" P2) 48" - MH RISER T/G - 48" P1) 48" - MH BASE T/n - 60" 2) 48" - Conseal CS-102 1.00" 1) Hole - 26 1) Hole - 22 9) MH Step ML-10-TDS-NCR - 10"	0 lb 1561 lb 3189 lb 5289 lb 0 lb 0 lb 0 lb 0 lb ----- 10038 lb	Structure Notes: 1. PER ASTM C-478 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS AT 90 DEGREES 5. CASTING: JBS 1150 "STORM" SUPPLIED BY OTHERS
--	--	---

Structure Total: 10038 lb


Rim: 560.41' Rim to Invert: 10.57' Slack: 2.34" Sump: 2.5" Step Position: 90°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2	556.38'	270°	136.659"	15" RCP B WALL	19.5"	Hole 22	22"	22.854"	14.48"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

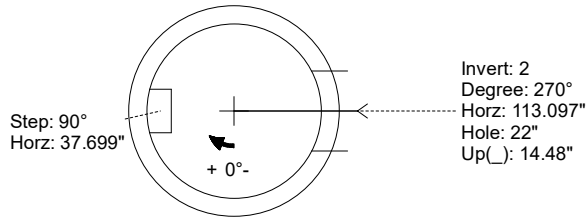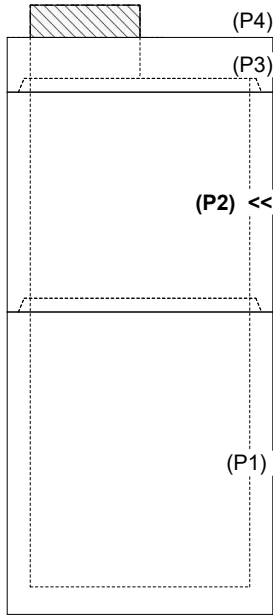

INSIDE WALL DIMENSIONS

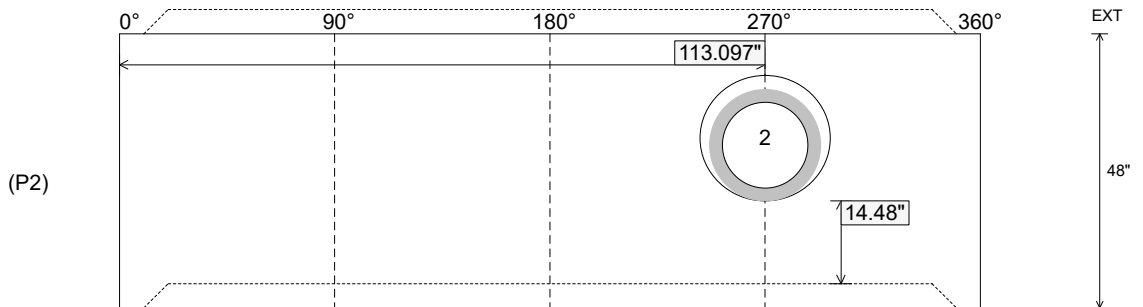

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"	Weight (Net): 3189 lb Volume (Net): 0.81cu.yd
----------------------------------	------------------------------------	--	--	--