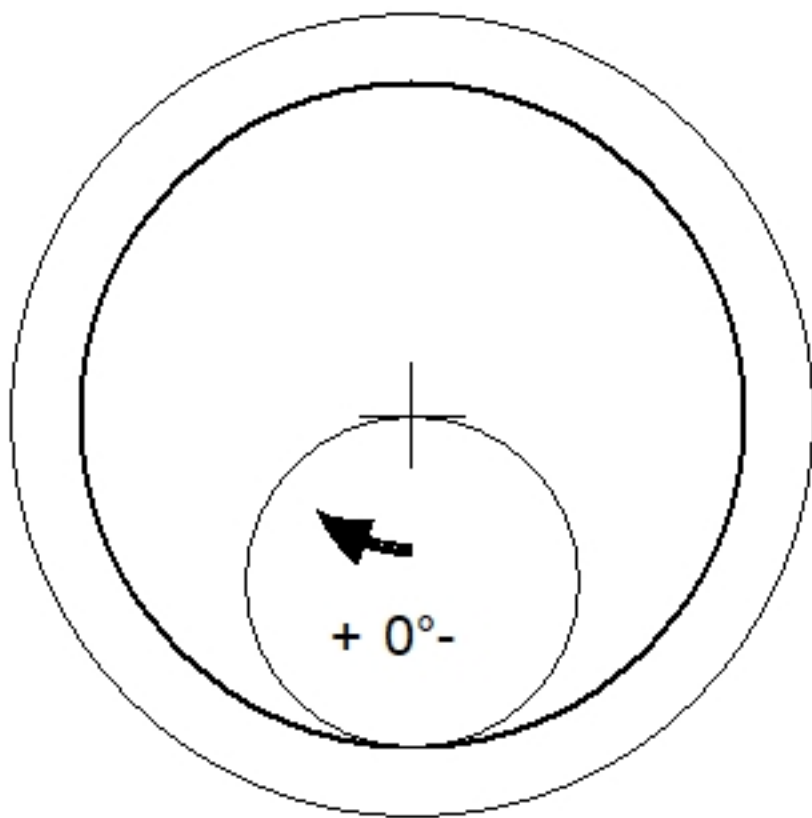


Job Name: 24-3432P3 - Sheperdsville CityPark Addition Job Location: Sheperdsville, KY Contractor: Yockum Trucking & Excavating					PC: A. Chamber TECH: J. Horsley Plant: 100									
Structure ID: 8" FT w//24"E Spec: Storm Type: STM.MH Size: 48" Rim: 0.667' Invert: 0.667' Rim to Invert: 0' Sump: 0" Floor (Top): 0' Floor Height: 0" Floor (Bot): 0' Overall Height: 0.583' Slack: 1"														
Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. . .REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING.				STRUCTURE SUMMARY: P1) 48" - MH FLAT TOP w/ 24" ECC Hole F/F - 7" 1) 24" - Conseal CS-102 1.00" 1286 lb 0 lb ----- Structure Total: 1286 lb										
				Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref		
				Rim	0.667'									
				Reducer										
				Invert 1										
				Invert 2										
				Invert 3										
				Invert 4										
				Invert 5										
				Invert 6										
				Invert 7										
Invert 8														
48" - MH FLAT TOP w/ 24" ECC Hole F/F - 7" - (P1)				Cast (Int. Dim.) - Interior Dimensions (P1) 0° 90° 180° 270° 360° EXT 7"										
				Submittal Drawing 9/24/2026 7:35:23 AM				SUBMITTAL APPROVED BY:						