

Job Name: 26-1394 - TMMI Ryder Lift Station
Job Location: Princeton, IN
Contractor: Koberstein Contracting, Inc.

Plant: 100

7/16/2026 2:28:58 PM

Tech: Jared - A

PC: A. Chambers



Structure ID: 3

P5 MH096LD17SP

MH FLAT TOP w/40"x66" Hatch F/G


- P6) 40" x 66" - HATCH (CAST FLUSH) - 3"
P5) 96" - MH FLAT TOP w/40"x66" Hatch F/G - 17"
P4) 96" - MH RISER T/G - 24"
P3) 96" - MH RISER T/G - 96"
P2) 96" - MH RISER T/G - 96"
P1) 96" - MH SEPARATE BASE-T EXT. 14" (142" OD) T/n - 12"
4) JOINT WRAP - 12" WD x 096" MAC WRAP
1) This Structure Includes a Cast-in Item - 40" x 66" Hatch (Supplied by Others)
4) 96" - Conseal CS-231 1.00" (Double)
3) PSX - 8QRS-S NYLO
1) PSX - 16M NYLO
1) PSX - 12-06 NYLO

Structure Total:


0 lb
8422 lb
5979 lb
23561 lb
23915 lb
19580 lb
0 lb
0 lb
0 lb
20 lb
8 lb
8 lb
81492 lb

Structure Notes:


- PER ASTM C-478 SPECIFICATIONS
- CONCRETE: 4,500 PSI AT 28 DAYS
- REINFORCEMENT - 2" MIN. REBAR CLEARANCE (TYP):
 - TOP MAT: #4 BAR @ 12" C.C. E.W. (GRADE 60)
 - BOTTOM MAT: #5 BAR @ 10" C.C. E.W. (GRADE 60)
- USF FABRICATION 40" X 66" (36" X 60" CLEAR OPENING) HATCH SUPPLIED BY OTHERS - TO BE CAST INTO FLAT LID
- LIFTERS: 4 EA. 5CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN
- TOP SURFACE TO RECEIVE LIGHT BRUSH FINISH

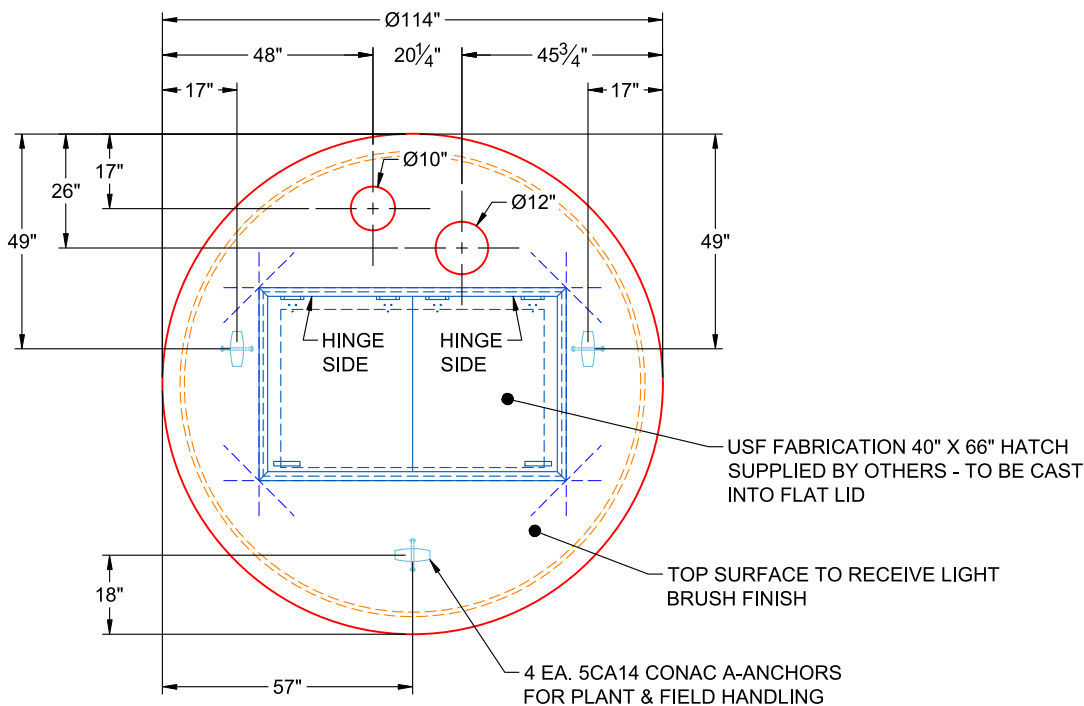

**PLAN VIEW
(RIGHT SIDE UP)**

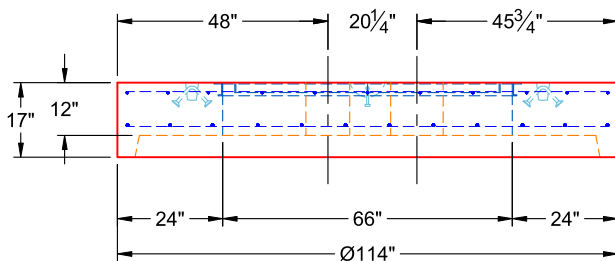

**FRONT VIEW
(RIGHT SIDE UP)**

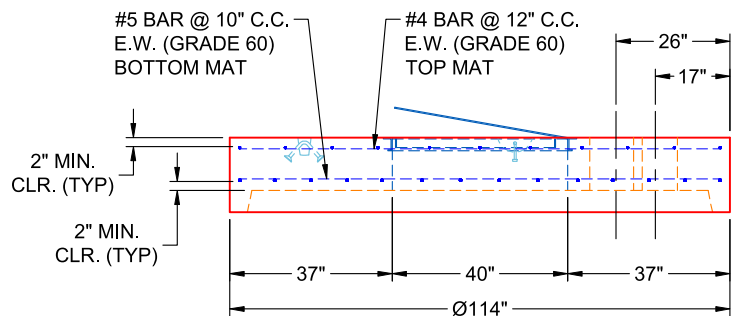

**SIDE VIEW
(RIGHT SIDE UP)**

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 9"

Height (Ext): 17"

Weight (Net): 8422 lb
Volume (Net): 2.15cu.yd

Job Number:

26-1394

Job Name:

TMMI Ryder Lift Station

Structure:

3

Note:

USF Fabrication 40" x 66" Hatch
Supplied By Others To Be Cast Into
Flat Lid