

Job Name: 26-2227 - UK Research and Education Center Entrance
Job Location: Princeton, KY
Contractor: J & J Excavating

Plant: Beaver Dam, KY

Tech: K. Cardwell

7/18/2026 11:10:07 AM

PC: E. Bradley





Structure ID: QL2 HW

P1 HWSB02314

23" x 14" - SLOPED BOX INLET/OUTLET TYPE 1 F/F

GENERAL NOTES:

- THIS DRAWING TO BE USED IN CONJUNCTION WITH KYTC STANDARD DRAWING RDH-110-08 & STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION
- CONCRETE: 4,500 PSI AT 28 DAYS
- REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
- REINFORCING BARS TO BE TACK WELDED OR TIED
- $\frac{3}{4}$ " CHAMFER REQUIRED ON ALL EXPOSED EDGES
- PIPE & LIFTING ANCHOR POCKETS TO BE GROUTED BY CONTRACTOR
- TOTAL WEIGHT: 3,358 LBS
- FIRST POUR: 2,076 LBS
- SECOND POUR: 1,282 LBS
- JR HOE KY-298 GRATES SUPPLIED BY ICAST

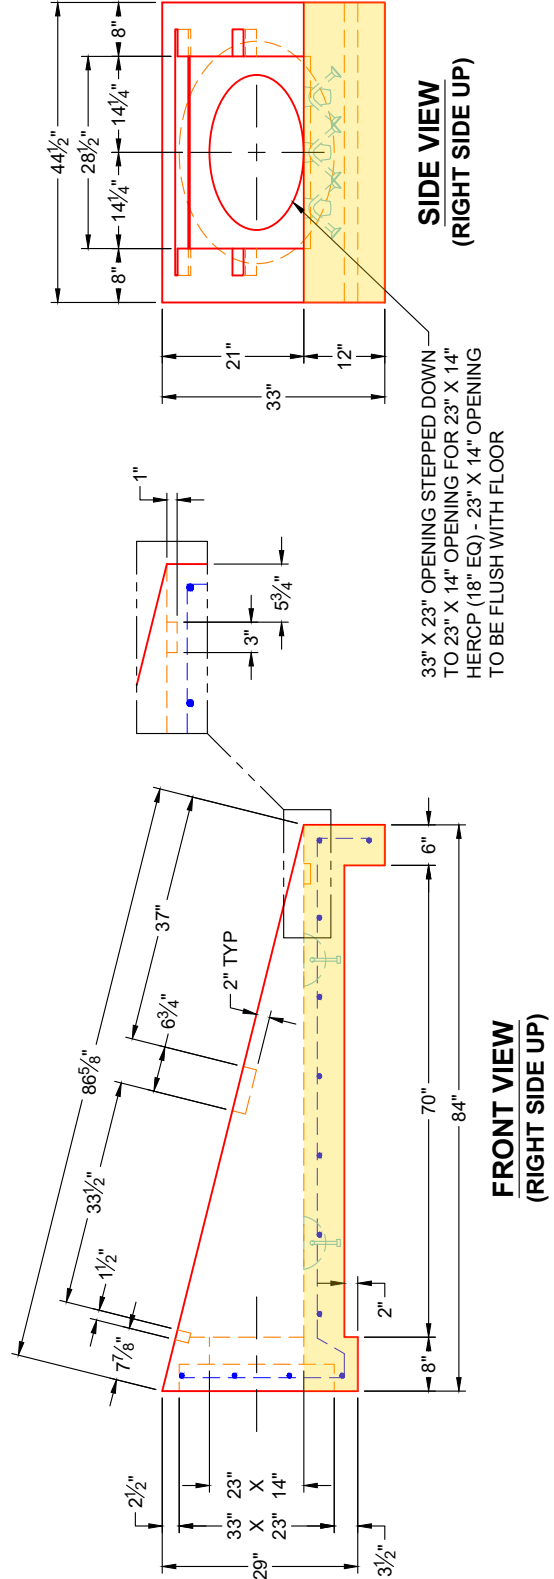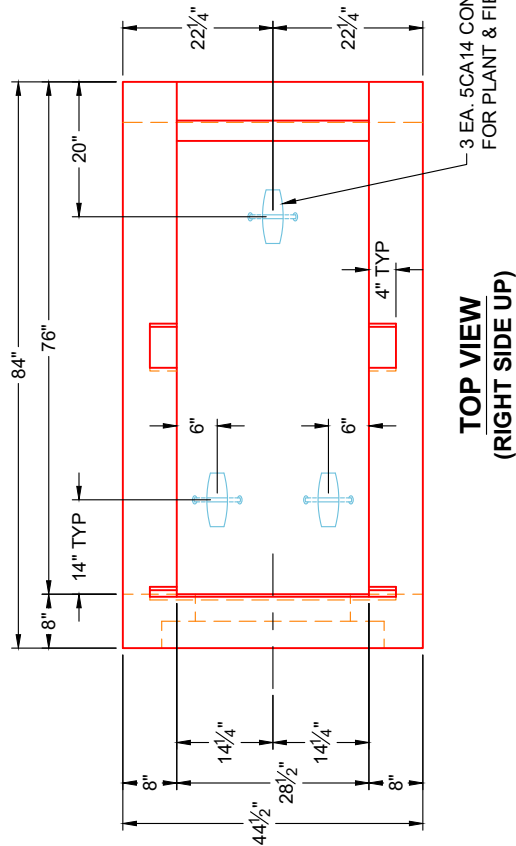

Job Name: 26-2227 - UK Research and Education Center Entrance
Job Location: Princeton, KY
Contractor: J & J Excavating

Plant: Beaver Dam, KY

Tech: K. Cardwell

7/18/2026 11:10:07 AM

PC: E. Bradley




Structure ID: QL2 HW

P1 HWSB02314


23" x 14" - SLOPED BOX INLET/OUTLET TYPE 1 F/F

GENERAL NOTES:


- THIS DRAWING TO BE USED IN CONJUNCTION WITH KYTC STANDARD DRAWING RDH-110-08 & STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION
- CONCRETE: 4,500 PSI AT 28 DAYS
- REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
- REINFORCING BARS TO BE TACK WELDED OR TIED
- $\frac{3}{4}$ " CHAMFER REQUIRED ON ALL EXPOSED EDGES
- PIPE & LIFTING ANCHOR POCKETS TO BE GROUTED BY CONTRACTOR
- TOTAL WEIGHT: 3,358 LBS
- FIRST POUR: 2,076 LBS
- SECOND POUR: 1,282 LBS
- JR HOE KY-298 GRATES SUPPLIED BY ICAST

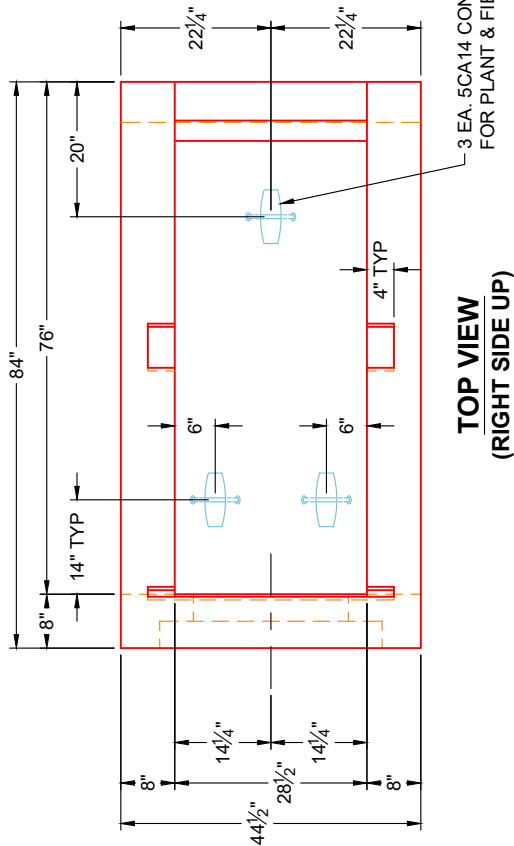

TOP VIEW
(RIGHT SIDE UP)

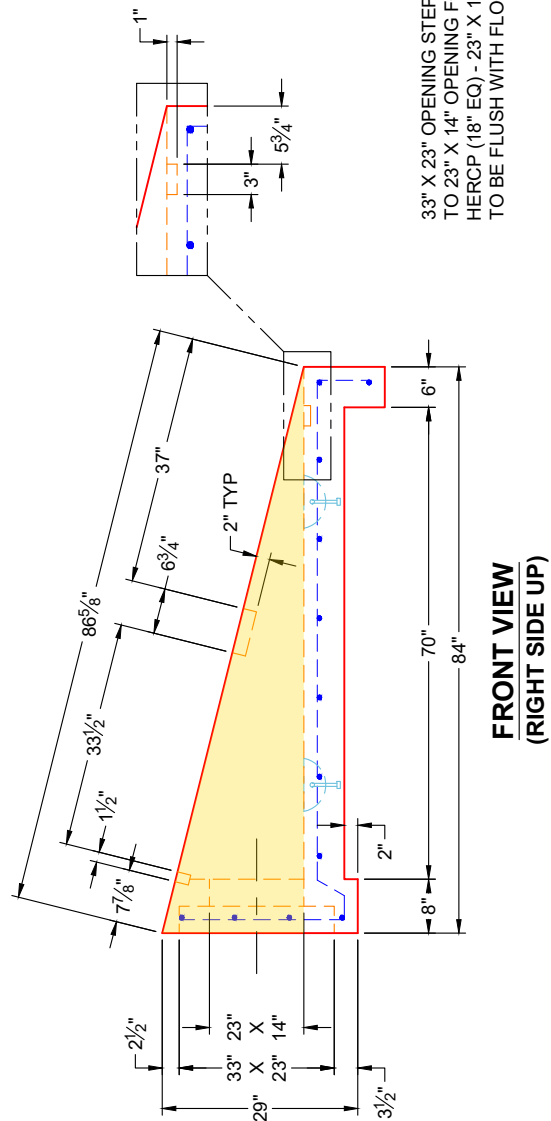

FRONT VIEW
(RIGHT SIDE UP)

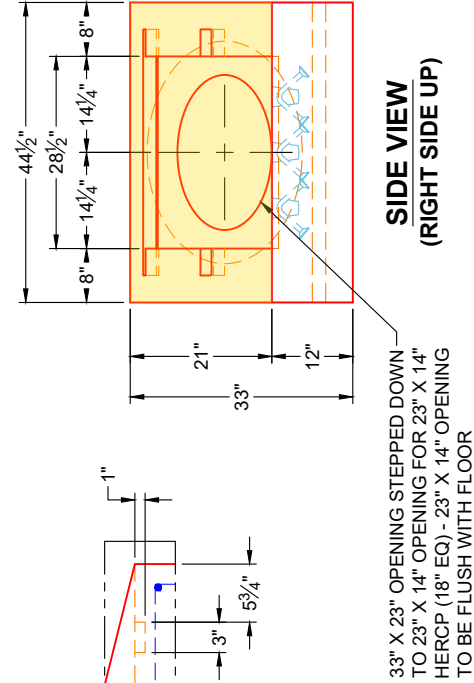

SIDE VIEW
(RIGHT SIDE UP)