

Structure ID: D22

P1 BX28640606-VH

BOX BASE 6inW, 6inF, Variable Ht F/n

- P2) 28" x 64" - CASTING HEIGHT - 6"
- P1) 28" x 64" - BOX BASE 6inW, 6inF, Variable Ht F/n - 40"
- 2) CASTING - JBS 4310 F/G
- 1) 28" x 64" - Conseal CS-102 1.00"
- 2) Hole - 26

0 lb
 5185 lb
 1000 lb
 0 lb
 0 lb

 Structure Total: 6185 lb



- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 4. NO STORM INVERT
 5. NO STEPS
 6. 2 EA. JBS 4310 FRAMES & GRATES SUPPLIED BY ICAST

Rim: 536' Rim to Invert: 3.74' Slack: 1.38" Sump: 2.5" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	532.26'	90°	38"	18" RCP B WALL	23"	Hole 26	26"	26"	0"	0"
Invert 2	532.36'	270°	38"	18" RCP B WALL	23"	Hole 26	26"	26"	1.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

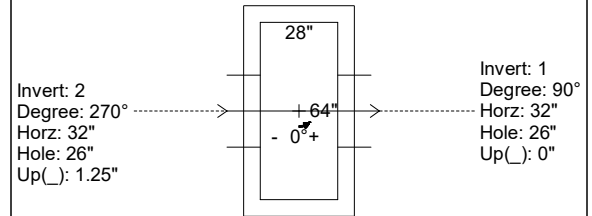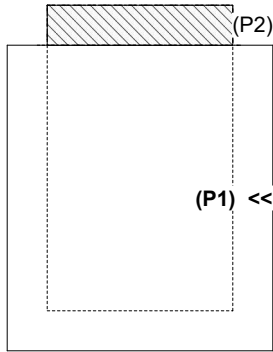

INSIDE WALL DIMENSIONS

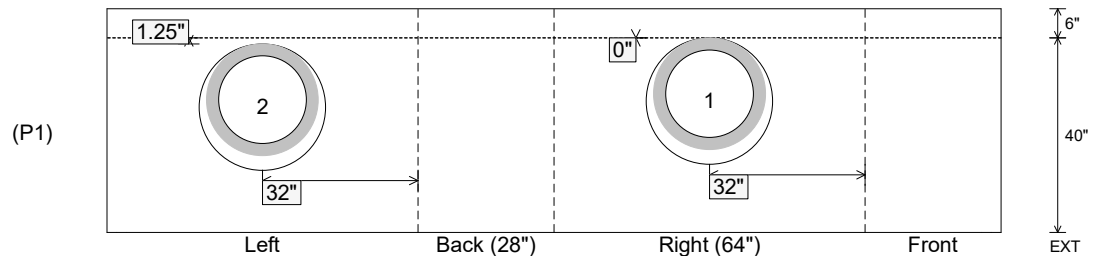

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 40" Height (Ext): 46"	Weight (Net): 5185 lb Volume (Net): 1.32cu.yd
----------------------------------	-------------------------------	--	--	--