

Structure ID: D3

P1 BX28640606-VH

BOX BASE 6inW, 6inF, Variable Ht T/n

P3) 28" x 64" - CASTING HEIGHT - 7.50" P2) 28" x 64" - BOX RISER 6inW F/G - 24" P1) 28" x 64" - BOX BASE 6inW, 6inF, Variable Ht T/n - 44" 1) CASTING - JBS 3300 F/G/H - Double Curb Inlet 2) 28" x 64" - Conseal CS-102 1.00" 3) Hole - 26 2) LINTEL BAR SLOT n/n - 7"x1"	0 lb 2506 lb 5336 lb 500 lb 0 lb 0 lb 0 lb ----- 8343 lb	Structure Notes: 1. PER ASTM C-913 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO STORM INVERT 5. NO STEPS 6. 2 EA. JBS 3300 FRAMES, GRATES, & CURB HOODS SUPPLIED BY ICAST
--	--	--



Structure Total: 8343 lb

Rim: 529.9' Rim to Invert: 6.18' Slack: 1.16" Sump: 2.5" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	523.72'	0°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	0"	0"
Invert 2	523.82'	180°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	1.25"	0"
Invert 3	523.82'	270°	38"	18" RCP B WALL	23"	Hole 26	26"	26"	1.25"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

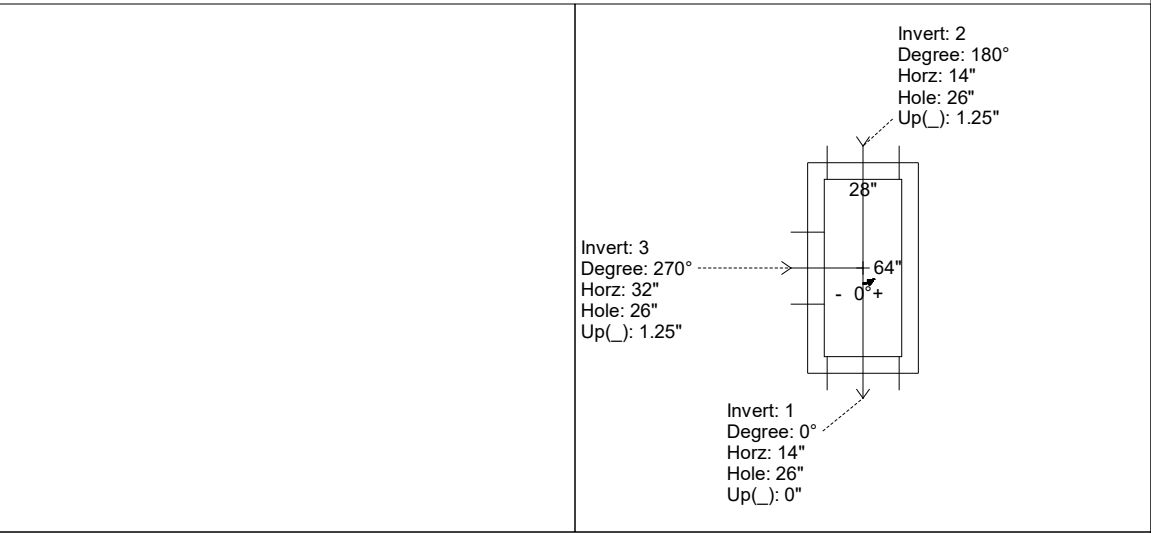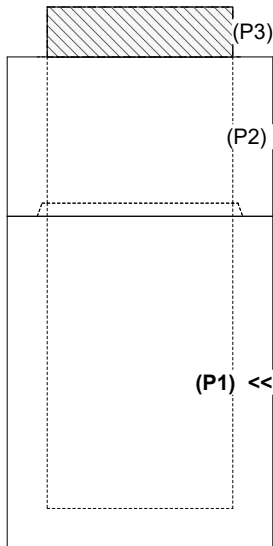

INSIDE WALL DIMENSIONS

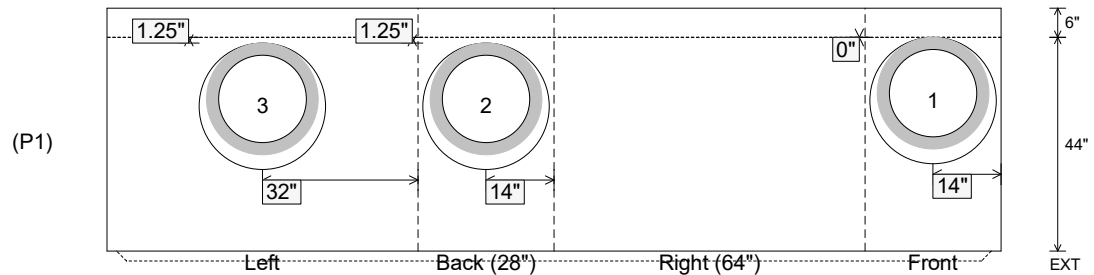

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 44" Height (Ext): 50"	Weight (Net): 5336 lb Volume (Net): 1.36cu.yd
----------------------------------	---------------------------------	--	--	--