

Structure ID: D3A

P1 BX28280606VH

BOX BASE 6inW, 6inF, Variable Ht T/n

- P2) 28" x 28" - BX MONOTOP 6"W/6"T w/Solid Top F/G - 42"
- P1) 28" x 28" - BOX BASE 6inW, 6inF, Variable Ht T/n - 35"
- 1) 28" x 28" - Conseal CS-102 1.00"
- 3) Hole - 26
- 4) Weir n/n - 24"x6"

3391 lb
 2400 lb
 0 lb
 0 lb
 0 lb

 Structure Total: 5792 lb



- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 4. NO STORM INVERT
 5. NO STEPS
 6. NO CASTING - SOLID TOP

Rim: 530.9' Rim to Invert: 6.92' Slack: 0.04" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	523.98'	0°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	-2.5"	0"
Invert 2	524.08'	90°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	-1.25"	0"
Invert 3	524.08'	180°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	-1.25"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

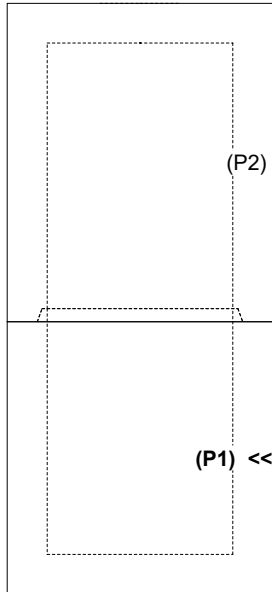

INSIDE WALL DIMENSIONS

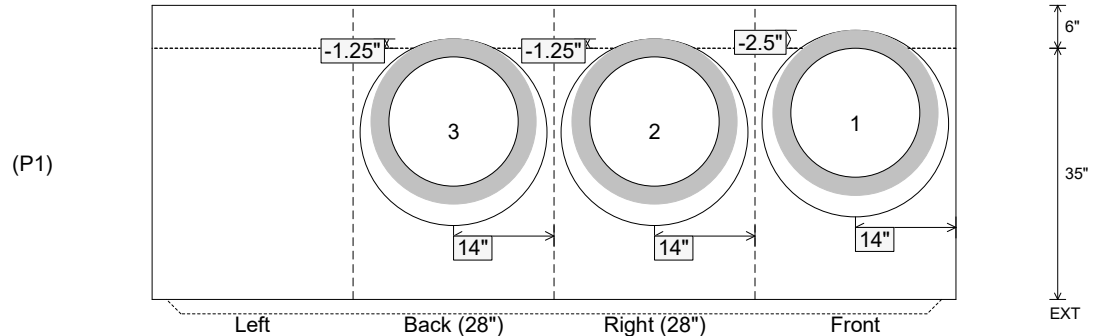

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 35" Height (Ext): 41"	Weight (Net): 2400 lb Volume (Net): 0.61cu.yd
----------------------------------	---------------------------------	--	--	--