

Job Name: 26-2800 901652 13635 Telegraph Road
Job Location: CPU
Contractor: Contech Engineering Solutions

Plant: Beaver Dam

6/24/2026 10:19:45 AM

Tech: S. Felletter

PC: C. Goff



Structure ID: 10-CS-5

P3 MH060LD13SP

MH FLAT TOP SPEC. (30" CASTING CAST IN) F/G

P4) 30" - CASTING HEIGHT - 0"
P3) 60" - MH FLAT TOP SPEC. (30" CASTING CAST IN) F/G - 13"
P2) 60" - MH RISER Custom Ht T/G - 63"
P1) 60" - MH BASE Custom Ht T/n - 18"
1) ASSEMBLY REQUIRED
1) CVSTENCILING
2) 60" - Conseal CS-102 1.00"
2) Hole - 16

0 lb
2589 lb
6372 lb
4612 lb
0 lb
0 lb
0 lb
0 lb
Structure Total: 13573 lb


Structure Notes:
4" CASTING BY OTHERS
LIFTING ANCHORS TO BE INSTALLED
ON THE OUTSIDE OF THE STRUCTURE
ICAST TO INSTALL THE INTERNALS
CONTECH'S LOGO AS WELL AS THE
INLET AND OUTLET MUST BE
STENCILED ONTO THE STRUCTURE

Structure Total:


13573 lb

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE 5,000 PSI AT 28 DAYS.
3. REINFORCING: #5 @ 6" C.C. E.W. PER ASTM A615 (GRADE 60)

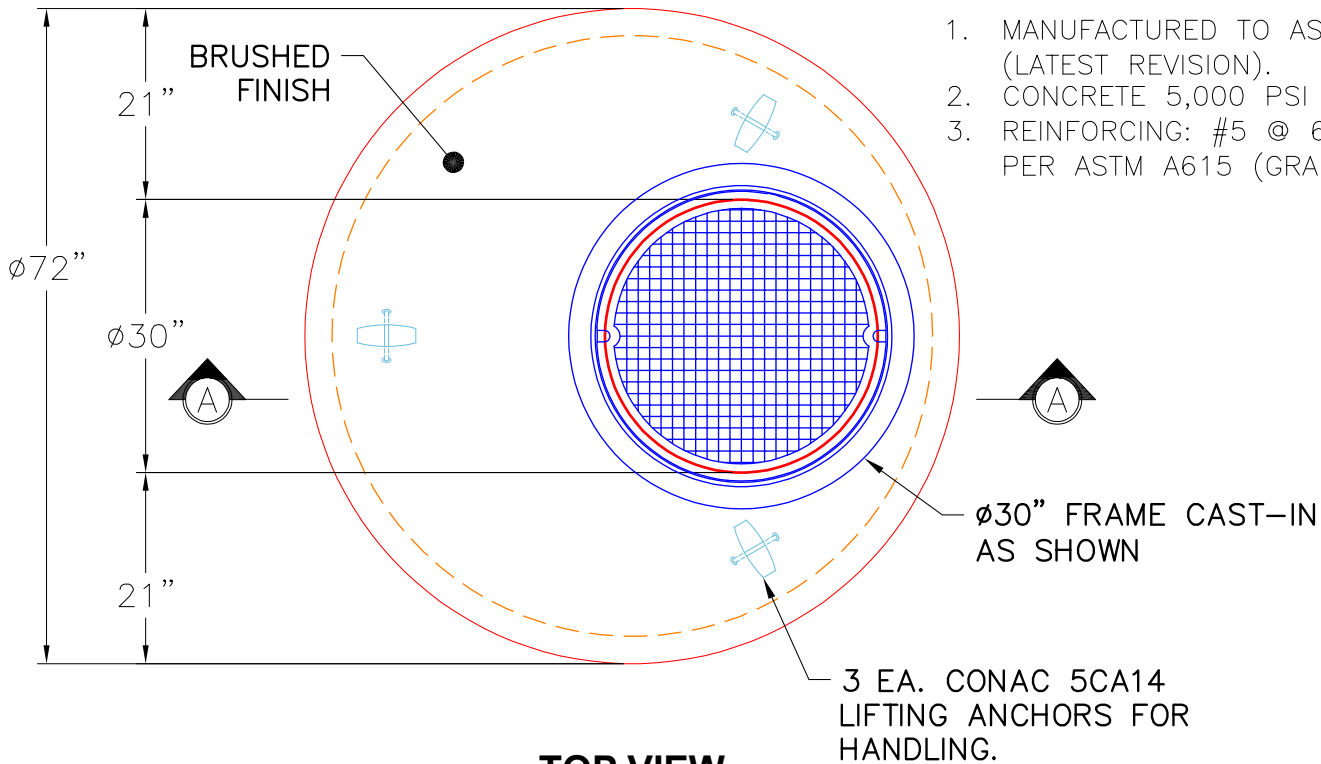

TOP VIEW

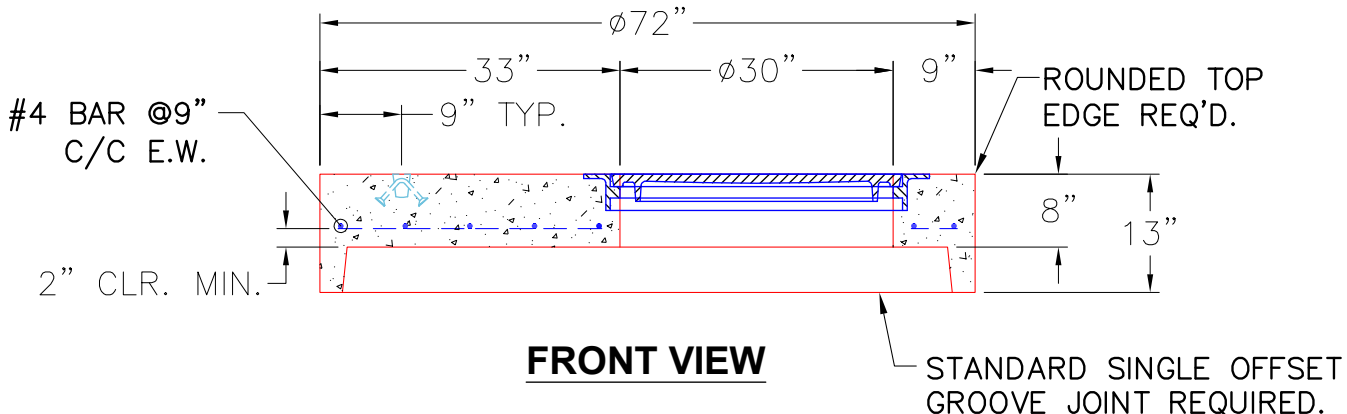

FRONT VIEW

STANDARD SINGLE OFFSET
GROOVE JOINT REQUIRED.

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 6"

Height (Ext): 13"

Weight (Net): 2589 lb
Volume (Net): 0.66cu.yd