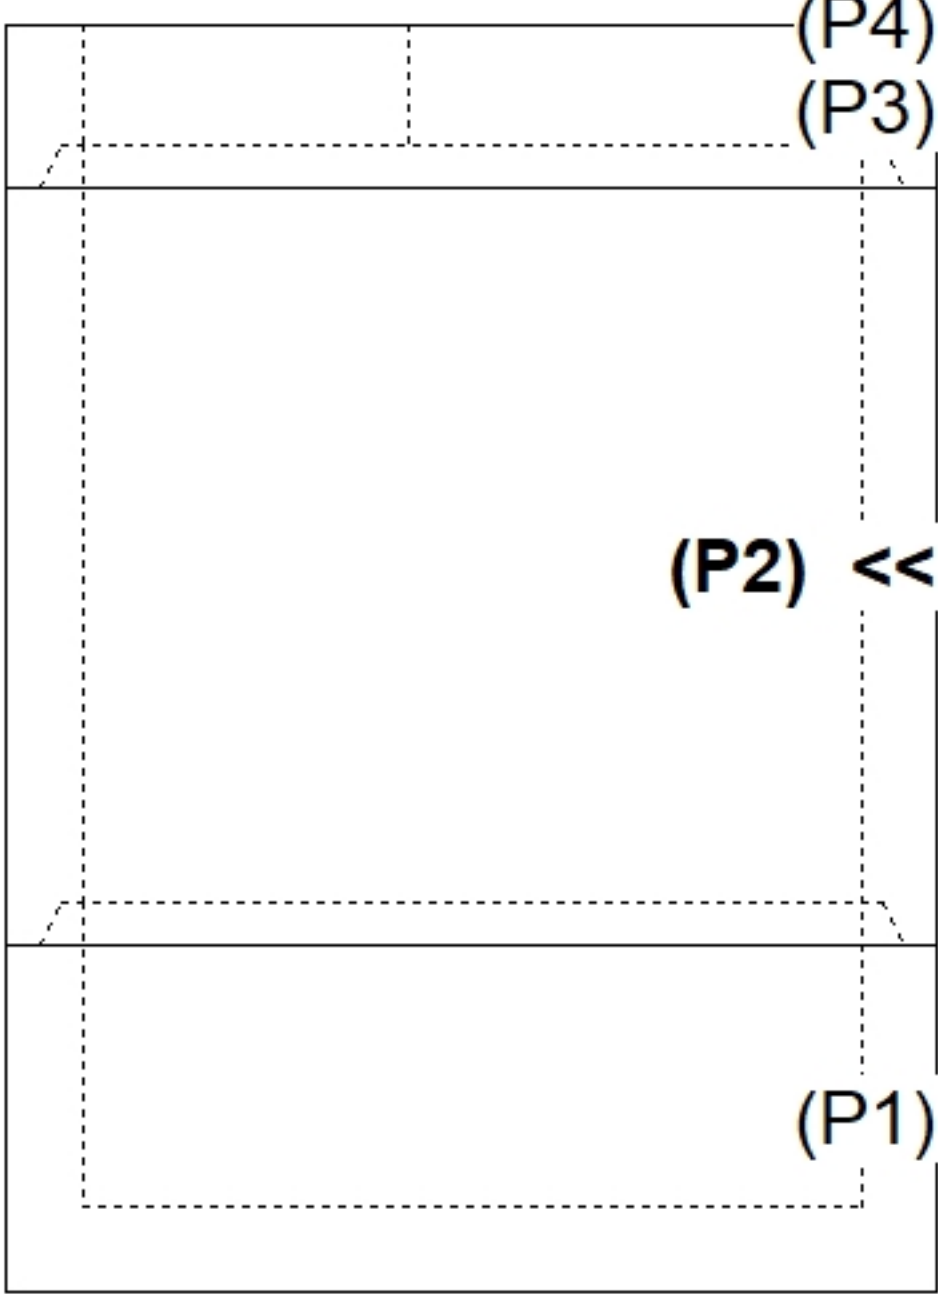
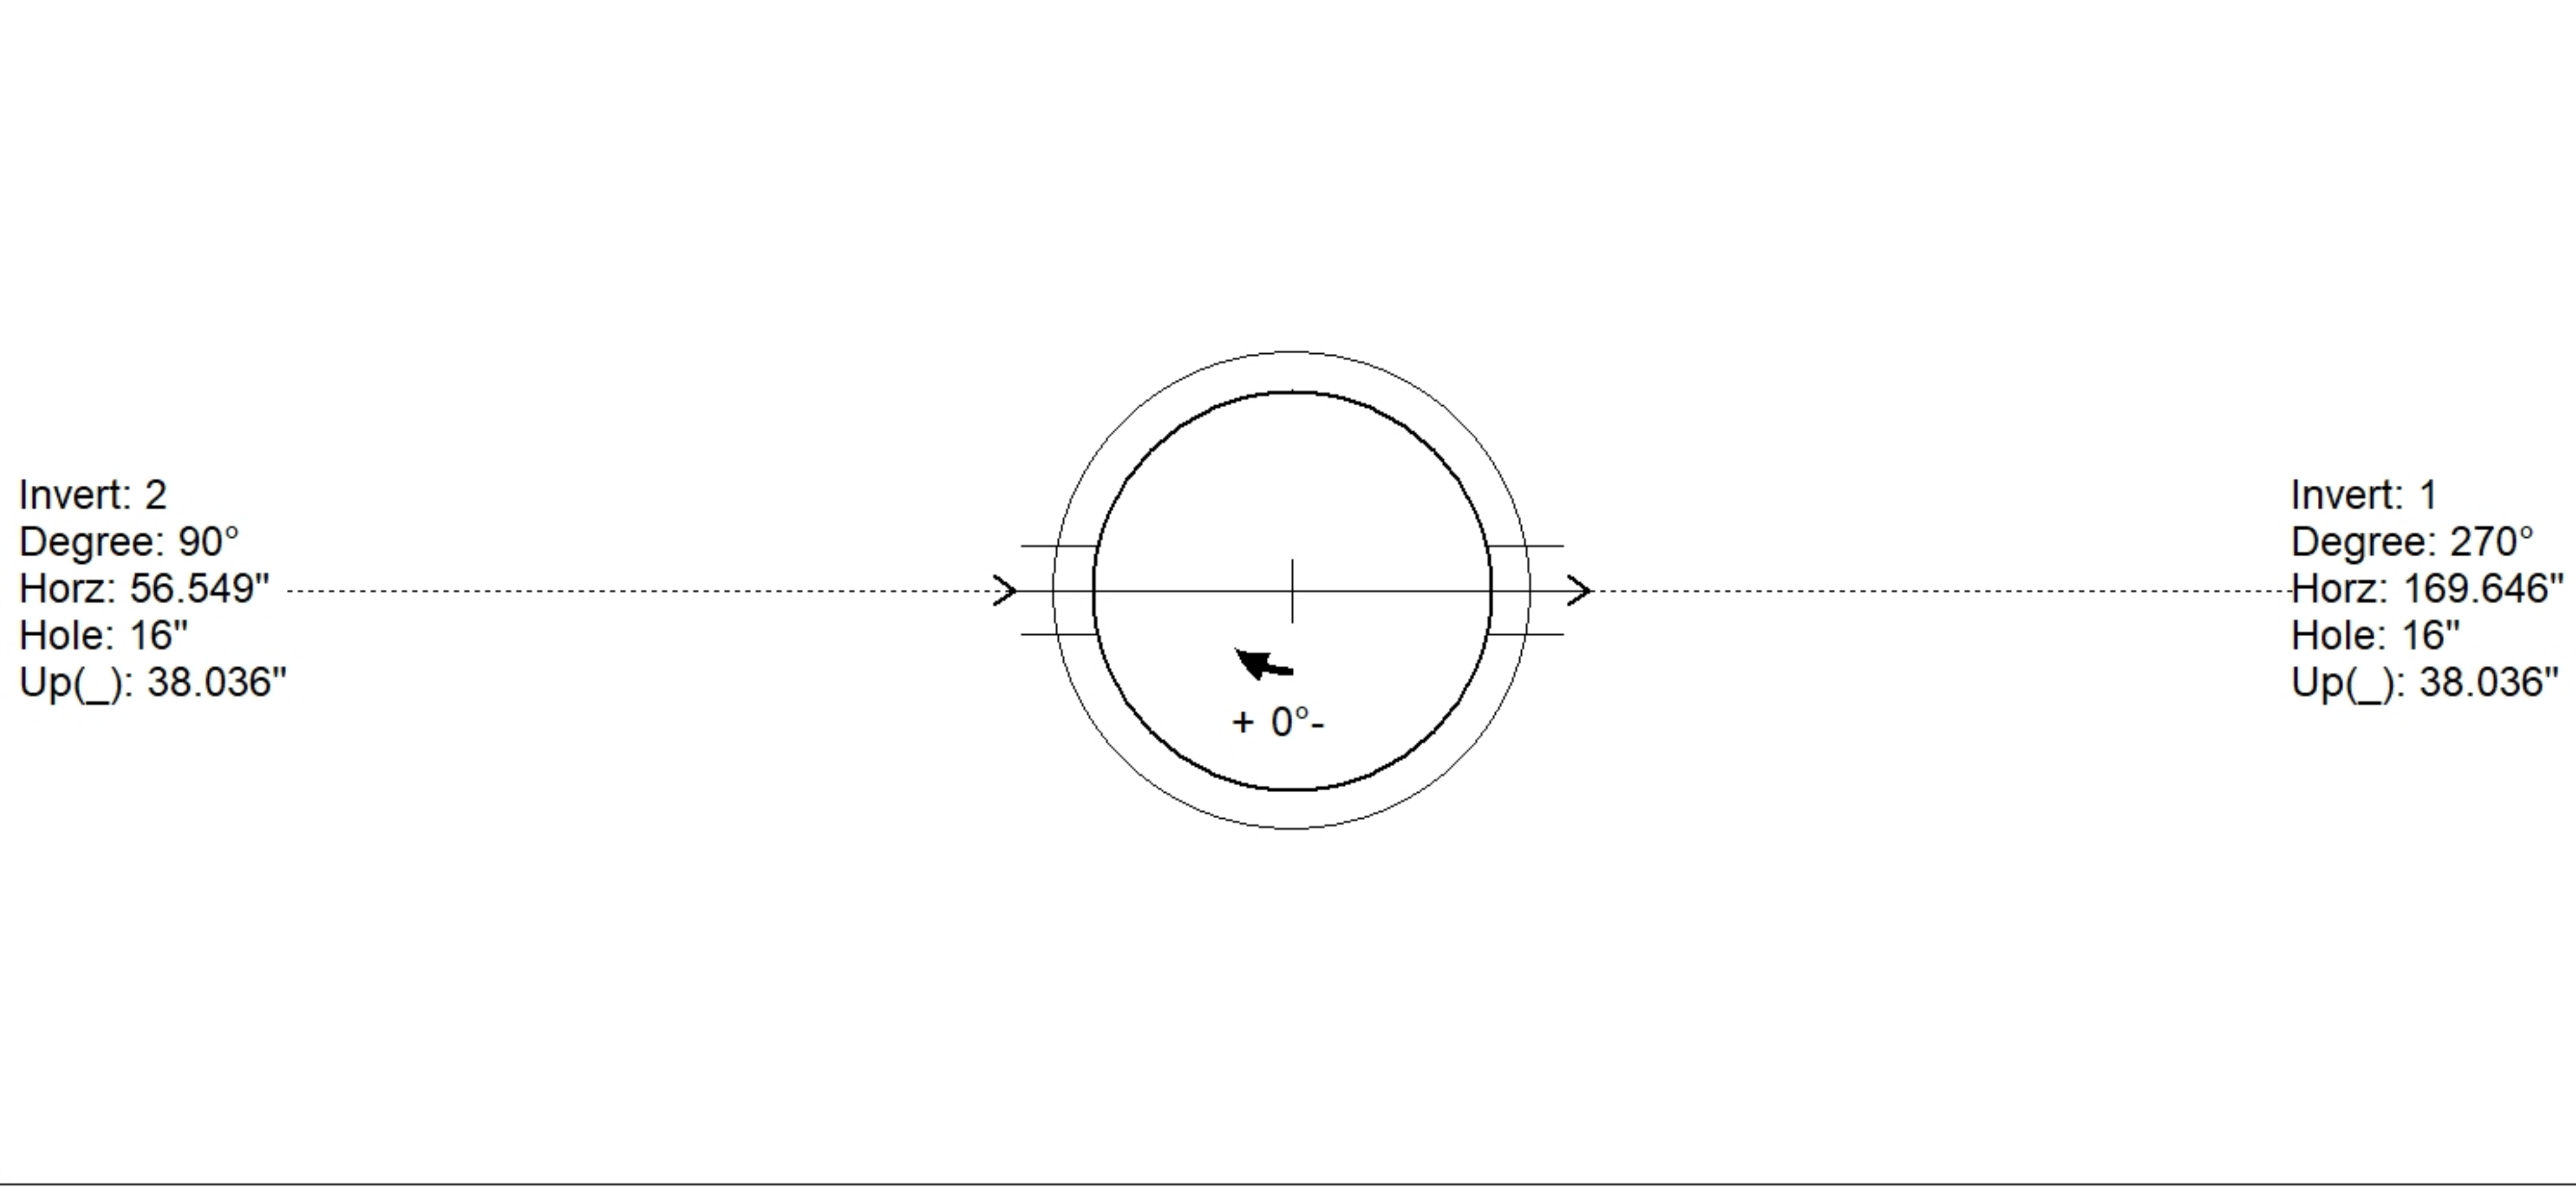
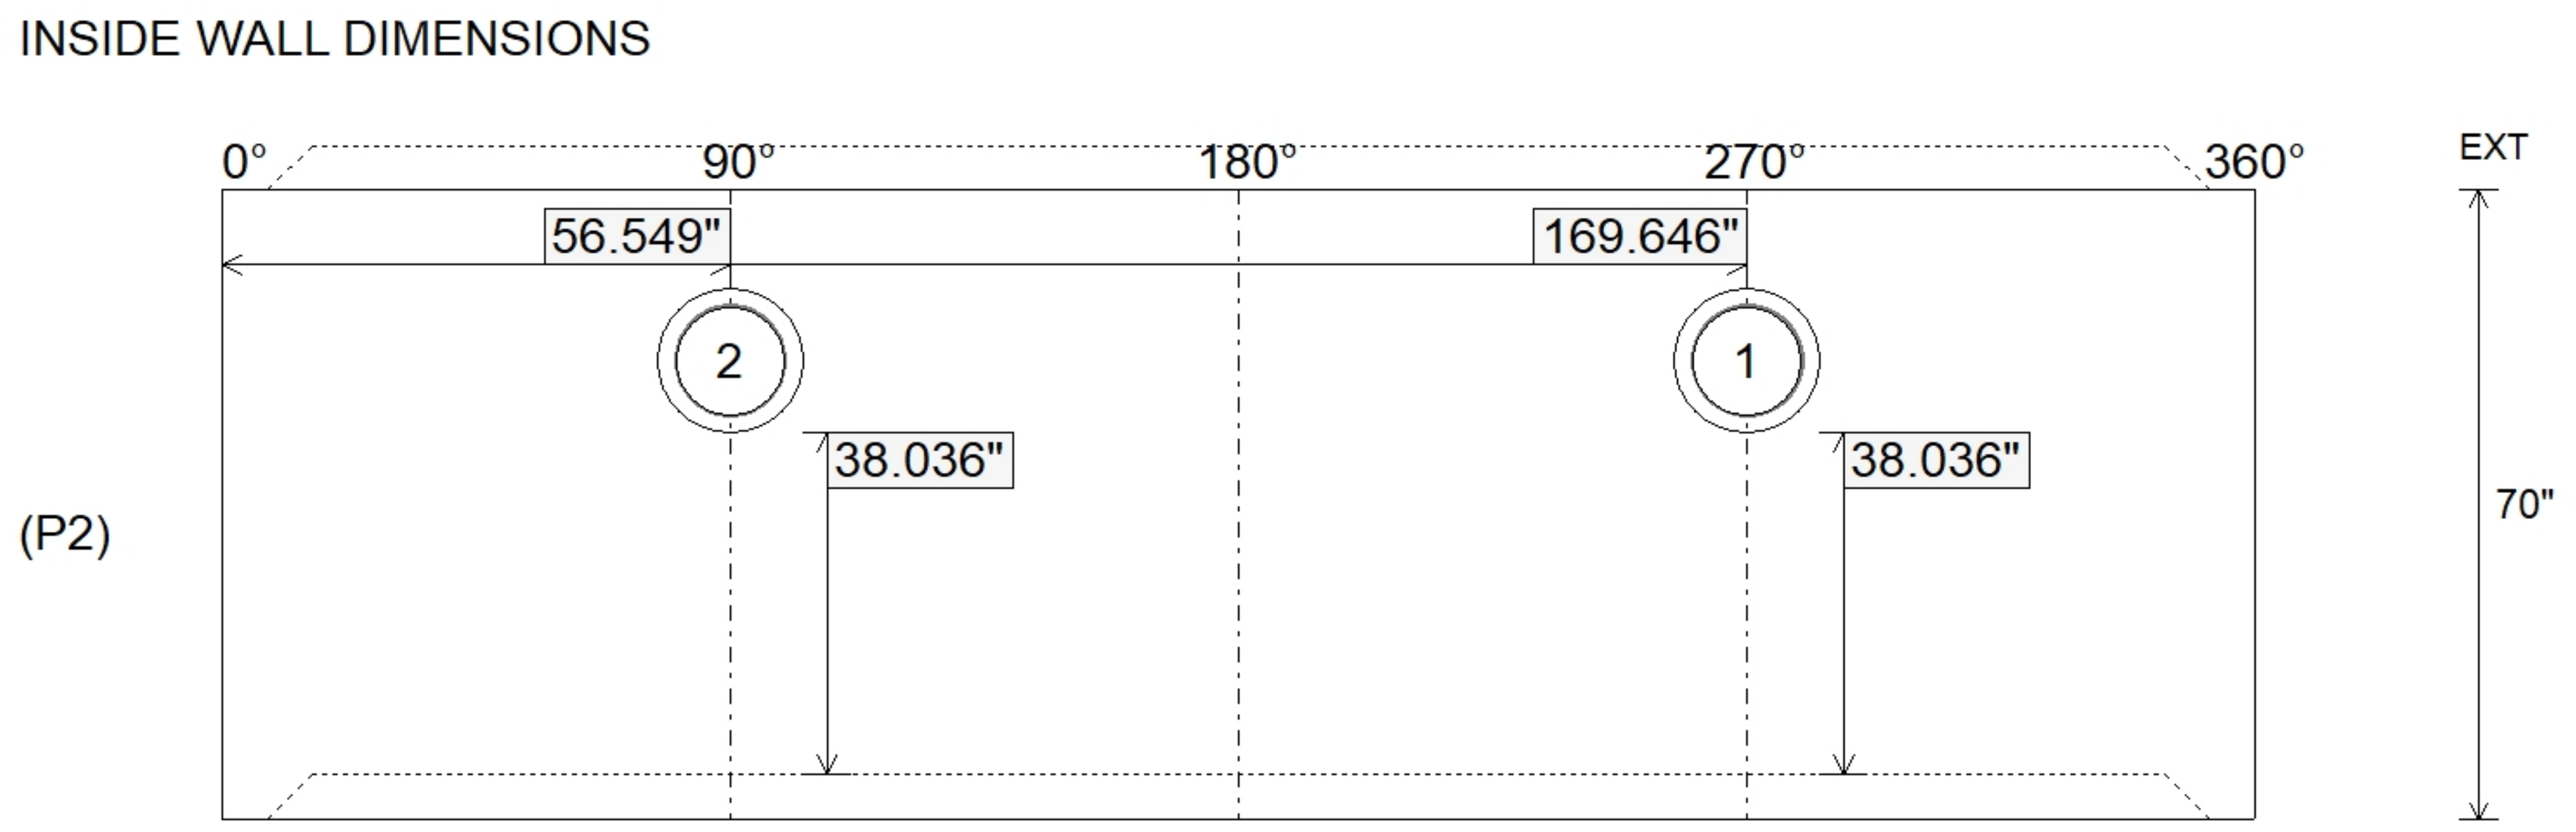


Job Name: 26-2800 901652 13635 Telegraph Road Job Location: CPU Contractor: Contech Engineering Solutions				Plant: Beaver Dam 6/24/2026 10:19:57 AM		Tech: S. Felletter PC: C. Goff						
Structure ID: 15-CS-6												
P2		MH072RSVF		MH RISER Custom Ht T/G								
P4) 30" - CASTING HEIGHT - 0" P3) 72" - MH FLAT TOP w/ 30" CASTING CAST IN F/G - 15" P2) 72" - MH RISER Custom Ht T/G - 70" P1) 72" - MH BASE T/n - 24" 1) ASSEMBLY REQUIRED 1) CVSTENCILING 2) 72" - Conseal CS-102 1.00" 2) Hole - 16						0 lb 4663 lb 9967 lb 7398 lb 0 lb 0 lb 0 lb 0 lb ----- 22028 lb		Structure Notes: 4" CASTING BY OTHERS LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE ICAST TO INSTALL THE INTERNALS CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE				
Rim: 611.88' Rim to Invert: 3.33' Slack: -0.004" Sump: 69.036" Step Position:												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	608.55'	270°	202.633"	12" PVC SDR35	12.5"	Hole 16	16"	16.135"	38.036"	0"		
Invert 2	608.55'	90°	67.544"	12" PVC SDR35	12.5"	Hole 16	16"	16.135"	38.036"	0"		
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
												
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 7" Floor Height: 0"		Height (Int): 70" Height (Ext): 70"		Weight (Net): 9967 lb Volume (Net): 2.55cu.yd		