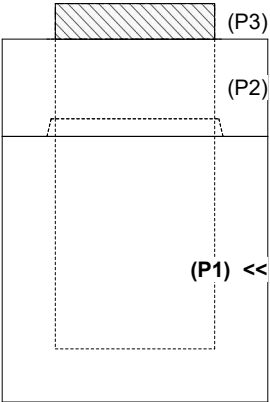
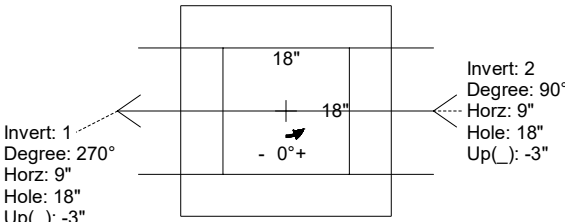
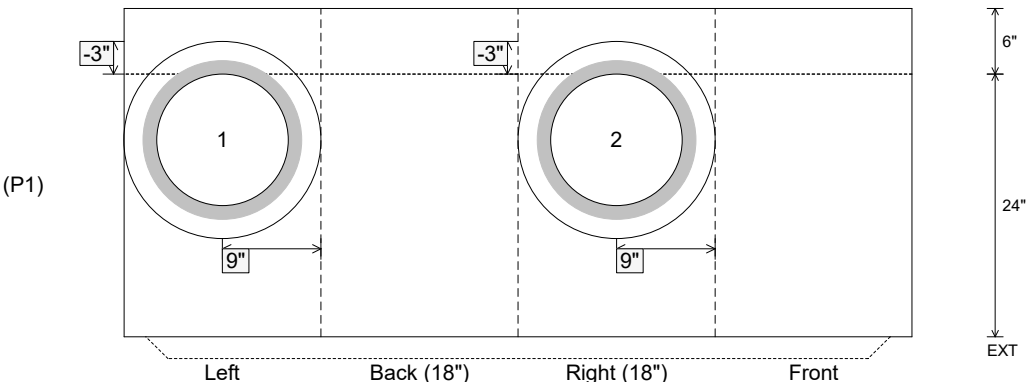


Job Name: 25-2952 - KYTC Jefferson Co Call 106 (251315) Job Location: Indiana, KY Contractor: Louisville Paving and Construction					Plant: 100 6/17/2026 5:40:54 PM		Tech: J. Horsley - A PC: J. Jarvis									
Structure ID: 132																
P1 BX1818-06BA24 BOX BASE 6inW, 6inF T/n																
P3) 18" x 18" - CASTING HEIGHT - 4" P2) 18" x 18" - BOX RISER 6inW, Variable Ht F/G - 11" P1) 18" x 18" - BOX BASE 6inW, 6inF T/n - 24" 2) 18" x 18" - Conseal CS-102 1.00" 2) Hole - 18"						0 lb 532 lb 1421 lb 0 lb 0 lb ----- Structure Total: 1953 lb		Structure Notes: 1. PER MSD YARD DRAIN / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #4 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 165-A FRAME & GRATE SUPPLIED BY OTHERS								
Rim: 566.45' Rim to Invert: 3.25' Slack: 0" Sump: 0" Step Position:																
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset						
Invert 1	563.2'	270°	15"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"						
Invert 2	563.2'	90°	15"	12" HDPE	14.5"	Hole 18	18"	18"	-3"	0"						
Invert 3																
Invert 4																
Invert 5																
Invert 6																
Invert 7																
Invert 8																
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions)  INSIDE WALL DIMENSIONS  <table><tr><td>Coating (Int): Coating (Ext):</td><td>Seam Up: Tongue Seam Dn: n/a</td><td>Wall Thickness: 6" Floor Height: 6"</td><td>Height (Int): 24" Height (Ext): 30"</td><td>Weight (Net): 1421 lb Volume (Net): 0.36cu.yd</td></tr></table>												Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 1421 lb Volume (Net): 0.36cu.yd
Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 1421 lb Volume (Net): 0.36cu.yd												