


THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

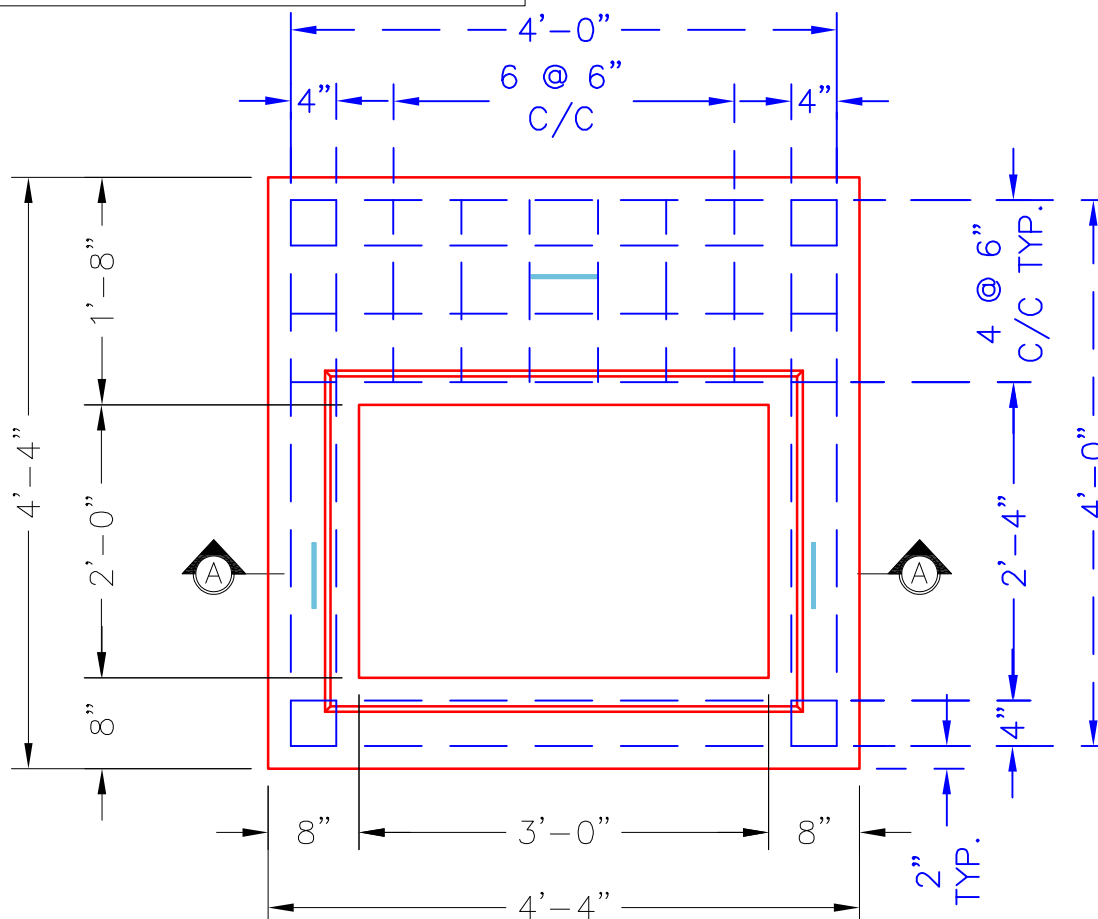

## PLAN VIEW

24" X 36" OPENING  
OFFSET IN SLAB

3 EA. CONAC .8 TON 8<sup>1</sup>/<sub>16</sub>"  
(6MM) WIRE ROPE ANCHOR  
REQUIRED-MINIMUM.

-TONGUE TO MATCH  
GROOVE IN 24"X36" RISER  
OR KDOT TYPE A TOP PHASE.

— ROUND TOP EDGES

#5 BAR @ 4" C/C TYP.  
(TOP & BOTTOM)

## SECTION A-A

2" CLR.

**\*KYTC STATE PROJECT\***

NOTES:

- CONCRETE: 4500 PSI @ 28 DAYS.
- REINFORCING: #5 BAR @ 4" & 6" C/C-GRADE 60.  
(TOP & BOTTOM LAYERS).
- 3 EA. CONAC WIRE LOOP LIFTERS REQUIRED.

#5 BAR CUT LIST  
20 EA. @ 48" LG.  
12 EA. @ 16" LG.

|                                                                                    |                                                     |                                      |                                                           |            |
|------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------------------|-----------------------------------------------------------|------------|
| PRODUCTION WORK ORDER                                                              |                                                     | PRODUCT I.D.:<br>BX036036-08TS024036 | DESCRIPTION:<br>CURB INLET TRANSITION SLAB 36" X 36" X 8" |            |
|  | QUALITY CONTROL CHECKLIST                           | PRODUCT VIEW: RIGHT SIDE UP          | CUSTOMER: SCOTTY'S CONTRACTING & STONE LLC                |            |
|                                                                                    | <input type="checkbox"/> ALL DIMENSIONS CORRECT.    | PLANT: BEAVER DAM, KY.               | PROJECT: KYTC CHRISTIAN CO. CALL 100 (ID 241018)          |            |
|                                                                                    | <input type="checkbox"/> LIFTERS INSTALLED.         | WEIGHT: 1,235 LBS.                   | STRUCTURE: 311 (454+25 RT) (SEC. P2)                      |            |
|                                                                                    | <input type="checkbox"/> OPENING OFFSET.            | TOP SECTION JOINT: TONGUE            | QUOTE/ORDER NO: 24-4208                                   |            |
|                                                                                    | <input type="checkbox"/> REINFORCING CORRECT.       | BOTTOM JOINT: FLAT                   | PC: C. GOFF                                               |            |
|                                                                                    | <input type="checkbox"/> SHIP-LAP TONGUE INSTALLED. | QC CHECK INITIALS:                   | DRAWING: S. FELLETER                                      |            |
|                                                                                    | <input type="checkbox"/> EDGES CHAMFERED.           |                                      | DATE: 08/05/26                                            |            |
| <input type="checkbox"/> ANY PATCHWORK ACCEPTABLE.                                 |                                                     |                                      | SCALE: NTS                                                | PG. 1 of 1 |