

Structure ID: A6

P2 MH048RS36



MH RISER T/G

P5) 30" x 30" - CASTING HEIGHT - 4" P4) 30" x 30" - GRADE RING F/F - 3" P3) 48" - MH FLAT TOP w/30"x30" Hole F/G - 12" P2) 48" - MH RISER T/G - 36" P1) 48" - MH BASE T/n - 42" 1) CASTING - HOE 468 F/G 2) 48" - SGL 1"x14.5' Butyl (2x) 1) Hole - 24 1) Hole - 20 7) MH Step ML-10-TDS-NCR - 10"	0 lb 218 lb 1350 lb 2515 lb 3932 lb 489 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 8503 lb	Structure Notes: PLAN LABEL: ST-A6 1. HOE 468 F/G PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
---	--	---


Rim: 533.02' Rim to Invert: 8.1' Slack: 0.2" Sump: 0" Step Position: 225°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

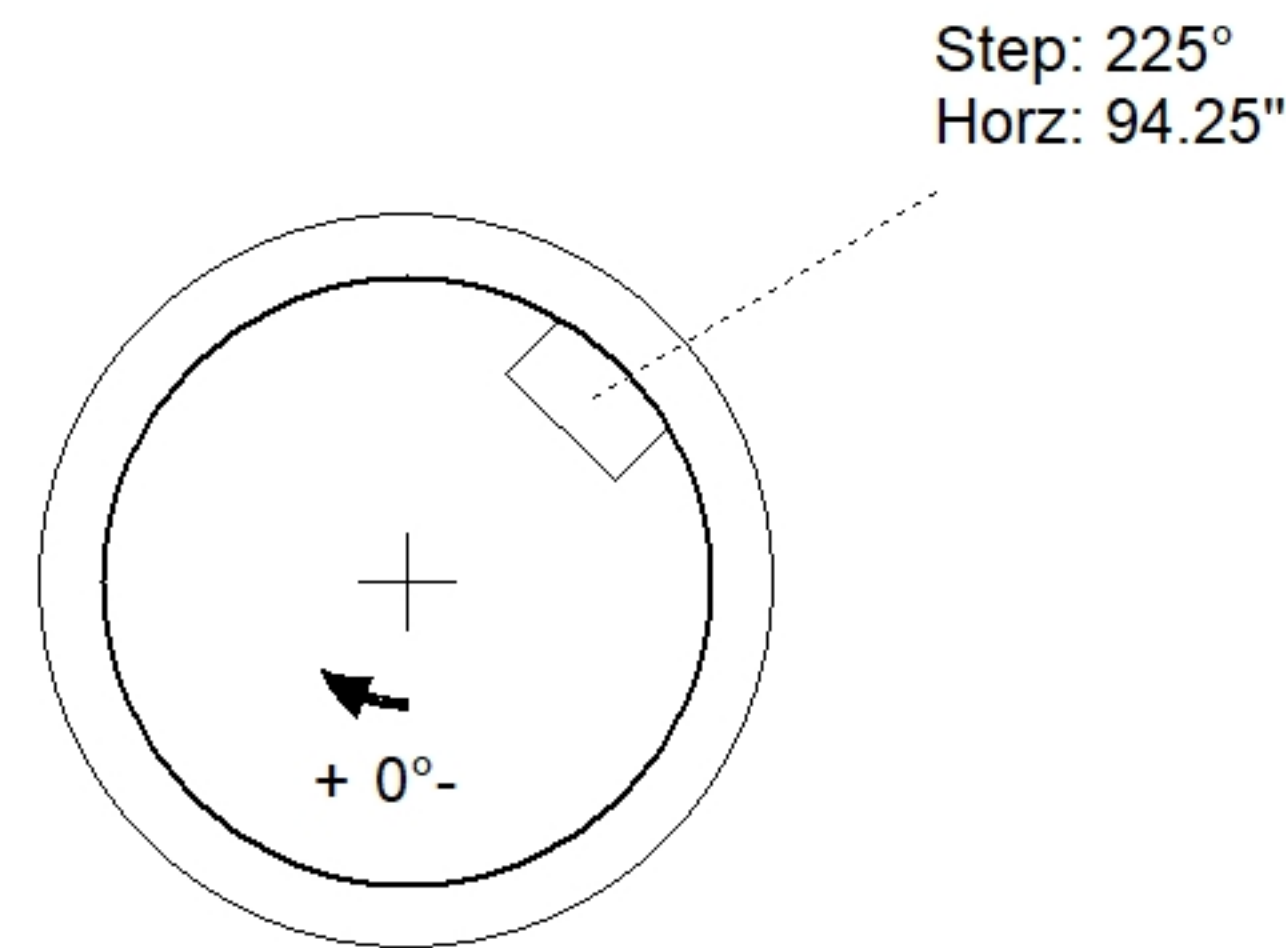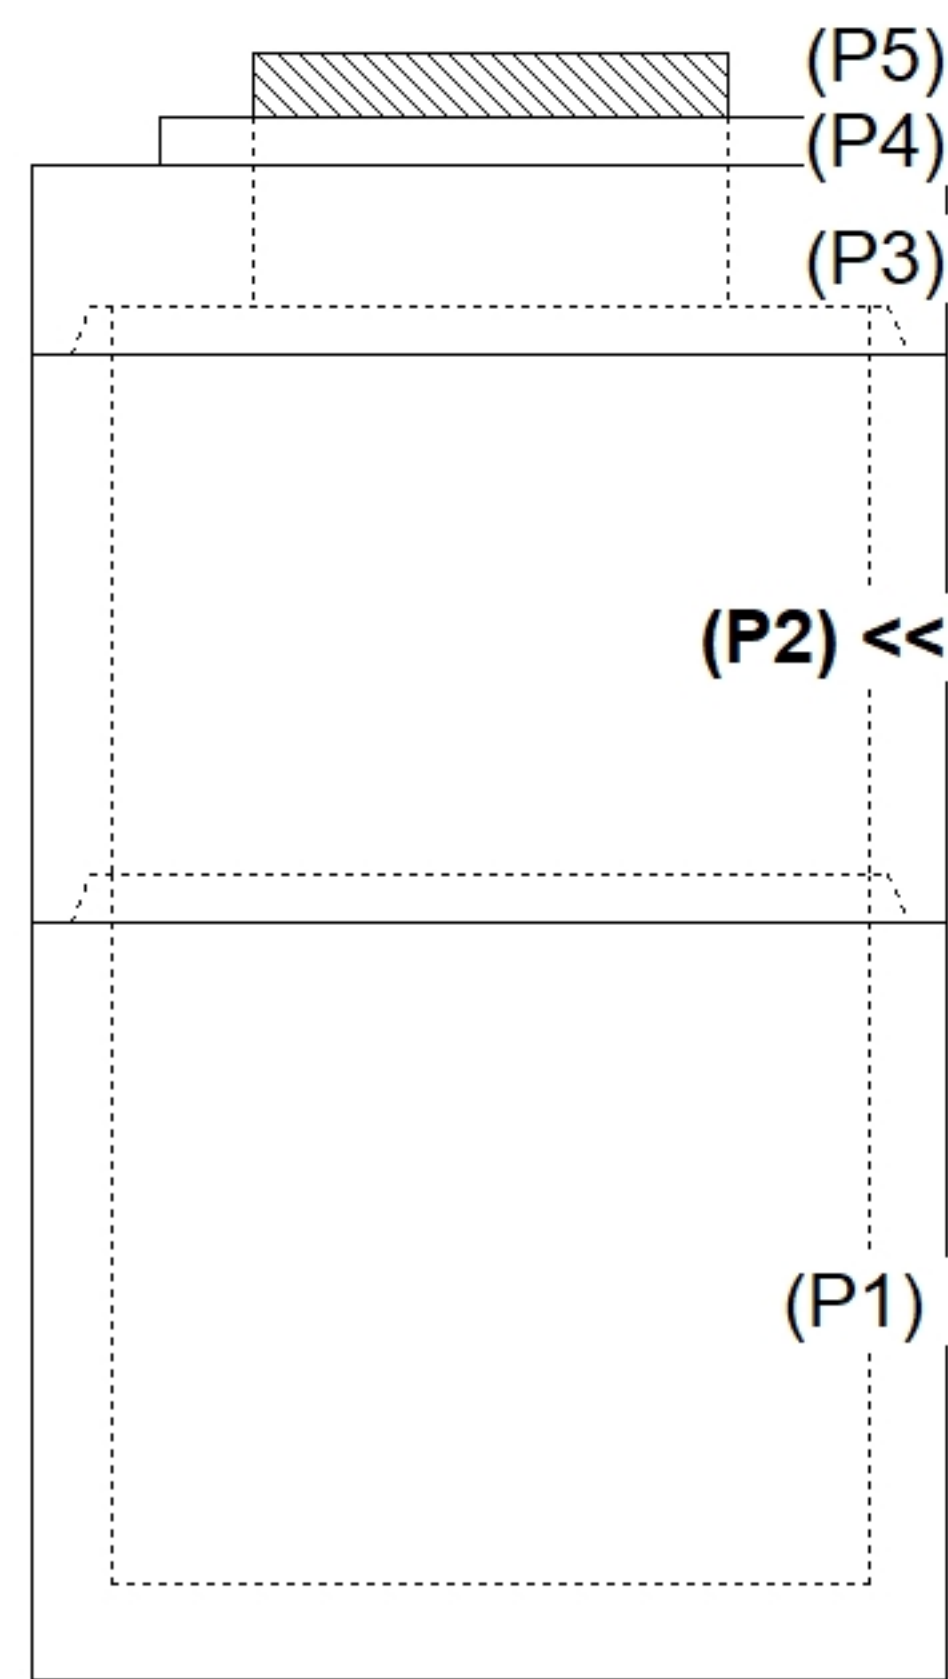

INSIDE WALL DIMENSIONS

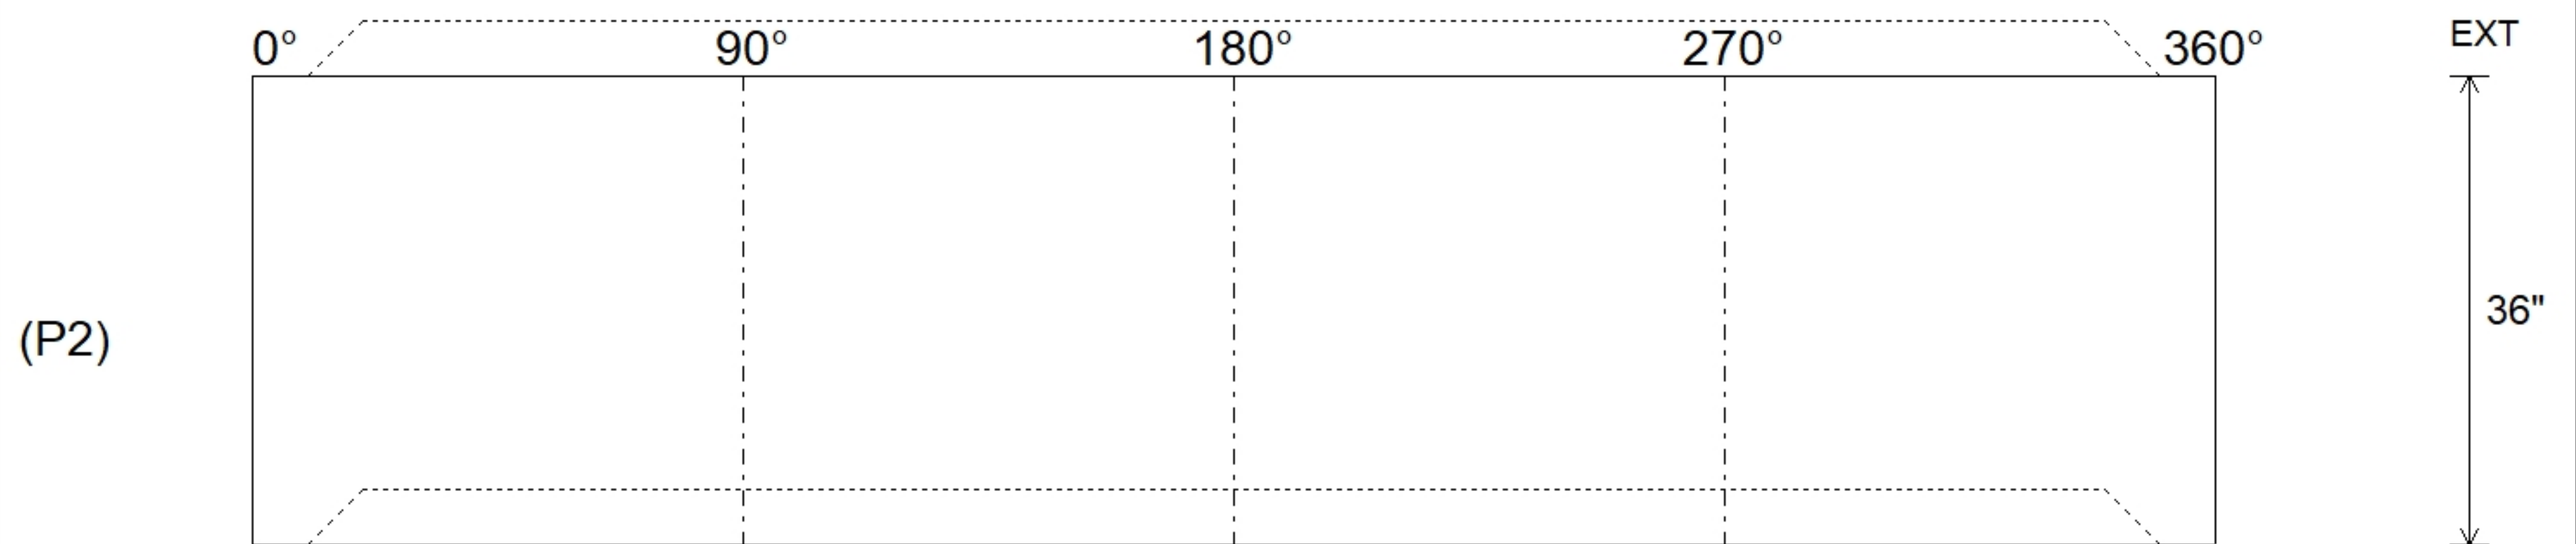

Coating (Int):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"
Coating (Ext):			Weight (Net): 2515 lb Volume (Net): 0.64cu.yd