

Job Name: 26-2659 879027 Kroger Marketplace Dearborn  
Job Location: CPU  
Contractor: Contech Engineering Solutions

Plant: Beaver Dam

Tech: S. Felletter

6/18/2026 1:07:28 PM

PC: C. Goff



## Structure ID: 10-CS-6

**P3 MH072LD15-30ECC**

**MH FLAT TOP SPEC. (30" ECC HOLE) F/G**

P4) 30" - CASTING HEIGHT - 4"  
P3) 72" - MH FLAT TOP SPEC. (30" ECC HOLE) F/G - 15"  
P2) 72" - MH RISER T/G - 84"  
P1) 72" - MH BASE T/n - 24"  
1) ASSEMBLY REQUIRED  
1) CVSTENCILING  
2) 72" - Conseal CS-102 1.00"  
2) Hole - 28



0 lb  
4661 lb  
11506 lb  
7398 lb  
0 lb  
0 lb  
0 lb  
0 lb  
-----  
23565 lb

Structure Total:

**Structure Notes:**  
4" CASTING BY OTHERS  
LIFTING ANCHORS TO BE INSTALLED  
ON THE OUTSIDE OF THE STRUCTURE  
ICAST TO INSTALL THE INTERNALS  
CONTECH'S LOGO AS WELL AS THE  
INLET AND OUTLET MUST BE  
STENCILED ONTO THE STRUCTURE

### NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).

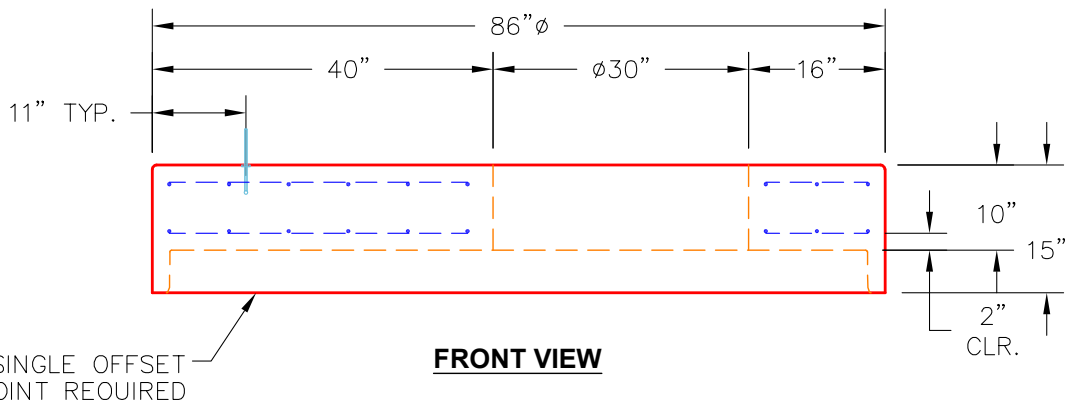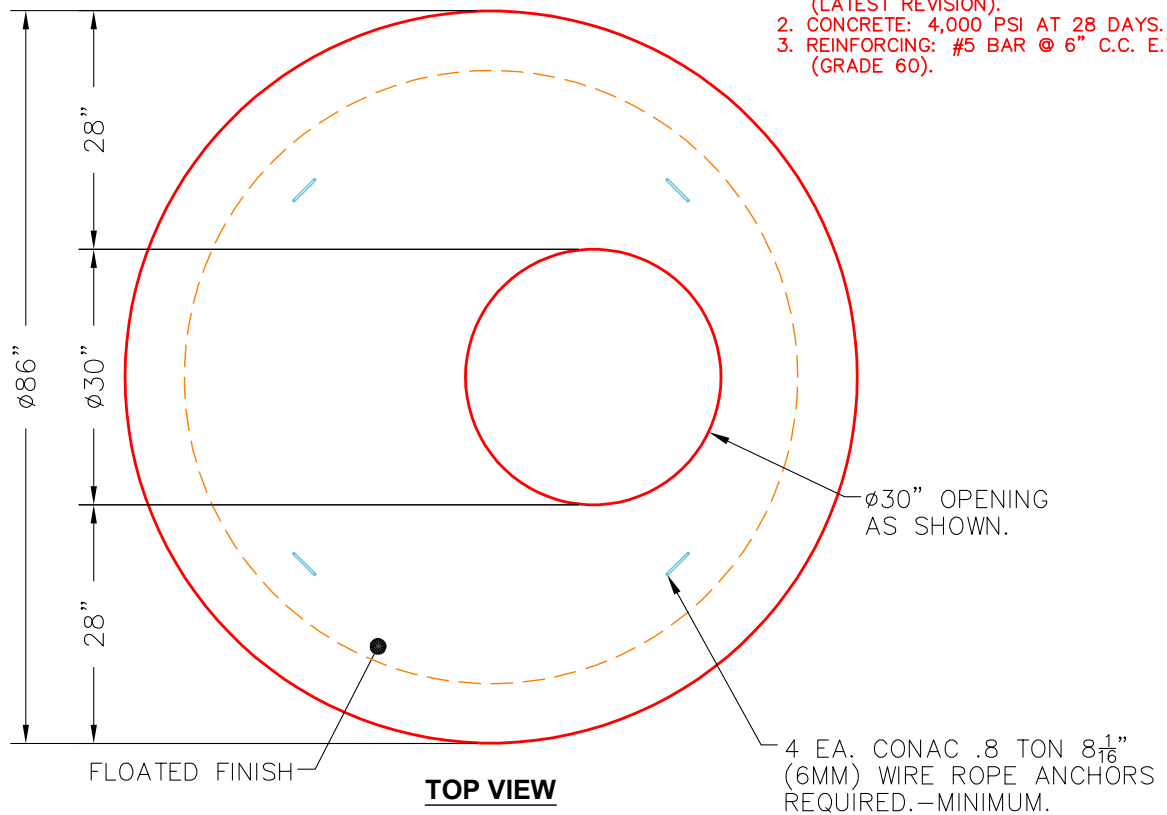

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Groove

Wall Thickness: 7"

Height (Ext): 15"

Weight (Net): 4661 lb  
Volume (Net): 1.19cu.yd