

Structure ID: E (DBI 24x24)

P1 BX2424-08BA30

BOX BASE 8inW, 8inF F/n

- P2) 24" x 24" - CASTING HEIGHT - 6"
- P1) 24" x 24" - BOX BASE 8inW, 8inF F/n - 30"
- 1) CASTING - HOE 342 F/G
- 1) 24" x 24" - Conseal CS-102 1.00"
- 1) Hole - 18

| | |
|------------------|---------|
| | 0 lb |
| | 3481 lb |
| | 250 lb |
| | 0 lb |
| | 0 lb |
| Structure Total: | 3731 lb |

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTIG BY ICAST (HOE 342 F/G).

REINFORCING PER ASTM A615 (GRADE 60).




- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 736.35' Rim to Invert: 3' Slack: 0" Sump: 0" Step Position:


| Position | Elev | Angle | Ext. (cw) | Pipe | Pipe OD | Connector | Hole | Horz Size | Up () | Offset |
|----------|---------|-------|-----------|--------------|---------|-----------|------|-----------|--------|--------|
| Invert 1 | 733.35' | 0° | 20" | 12" ADS N-12 | 14.5" | Hole 18 | 18" | 18" | -1.25" | 0" |
| Invert 2 | | | | | | | | | | |
| Invert 3 | | | | | | | | | | |
| Invert 4 | | | | | | | | | | |
| Invert 5 | | | | | | | | | | |
| Invert 6 | | | | | | | | | | |
| Invert 7 | | | | | | | | | | |
| Invert 8 | | | | | | | | | | |

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

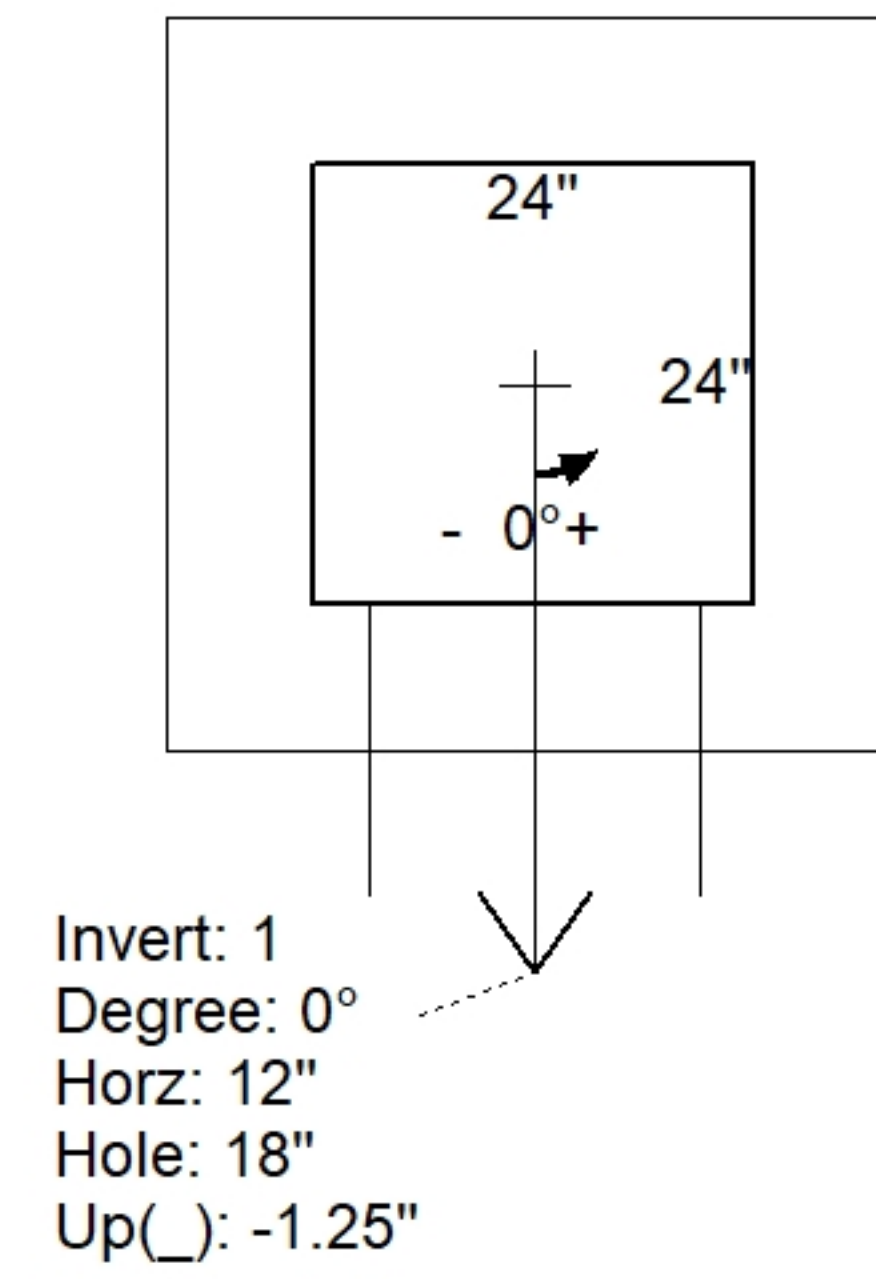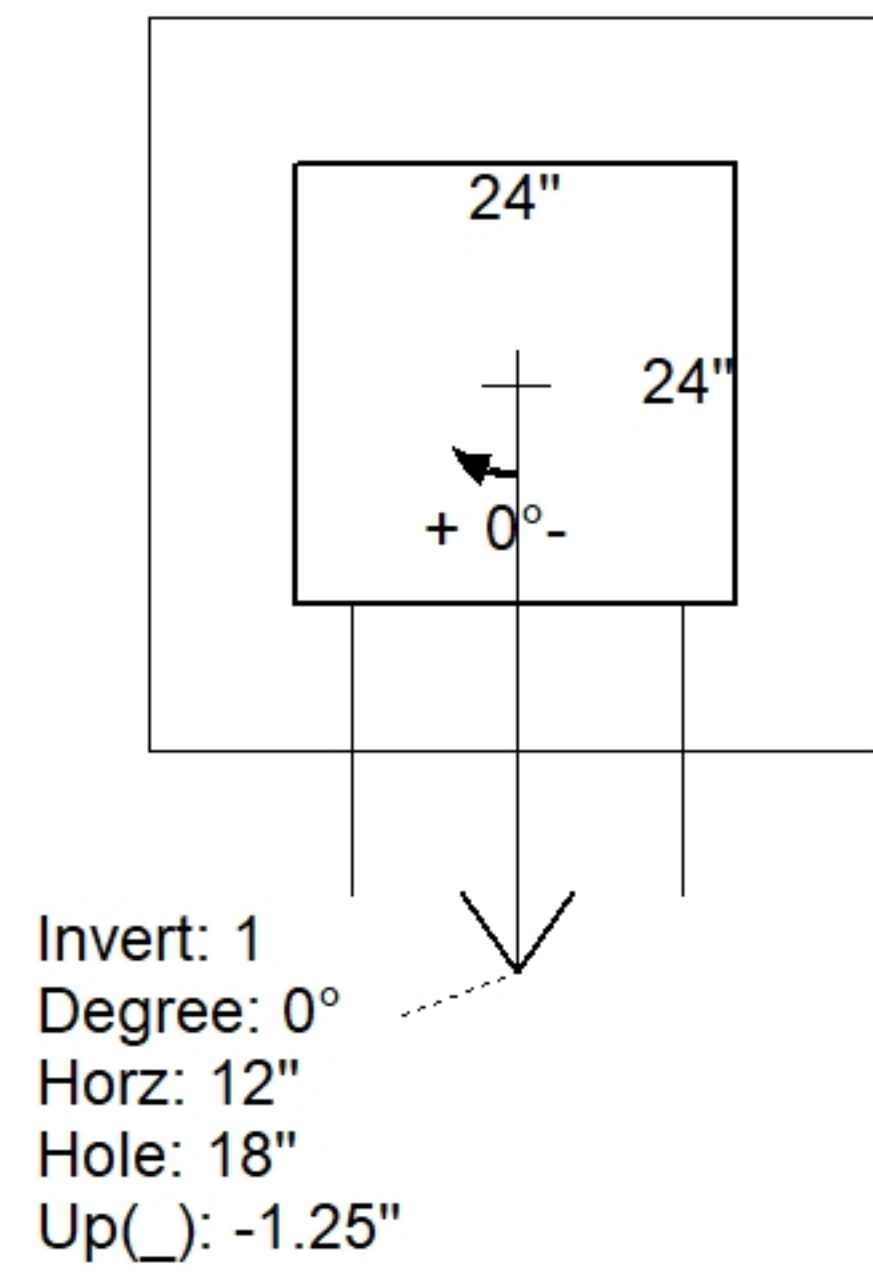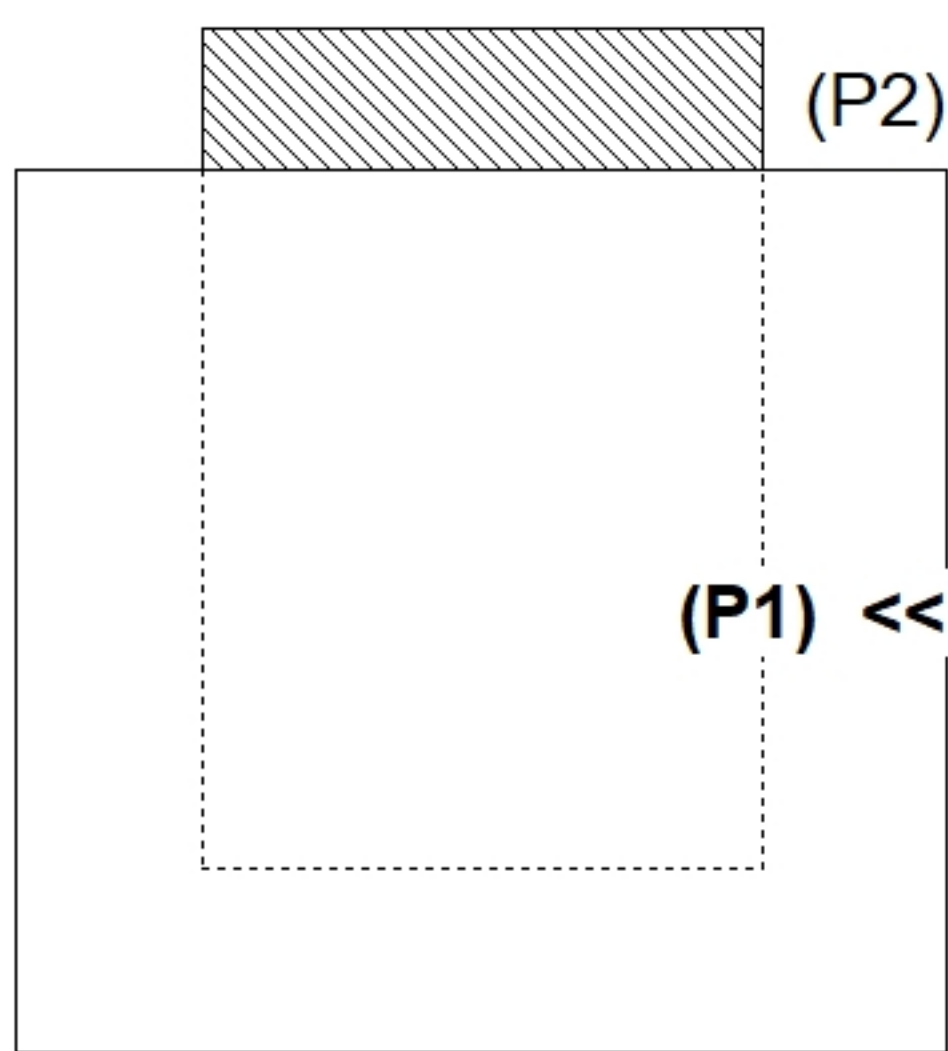

INSIDE WALL DIMENSIONS

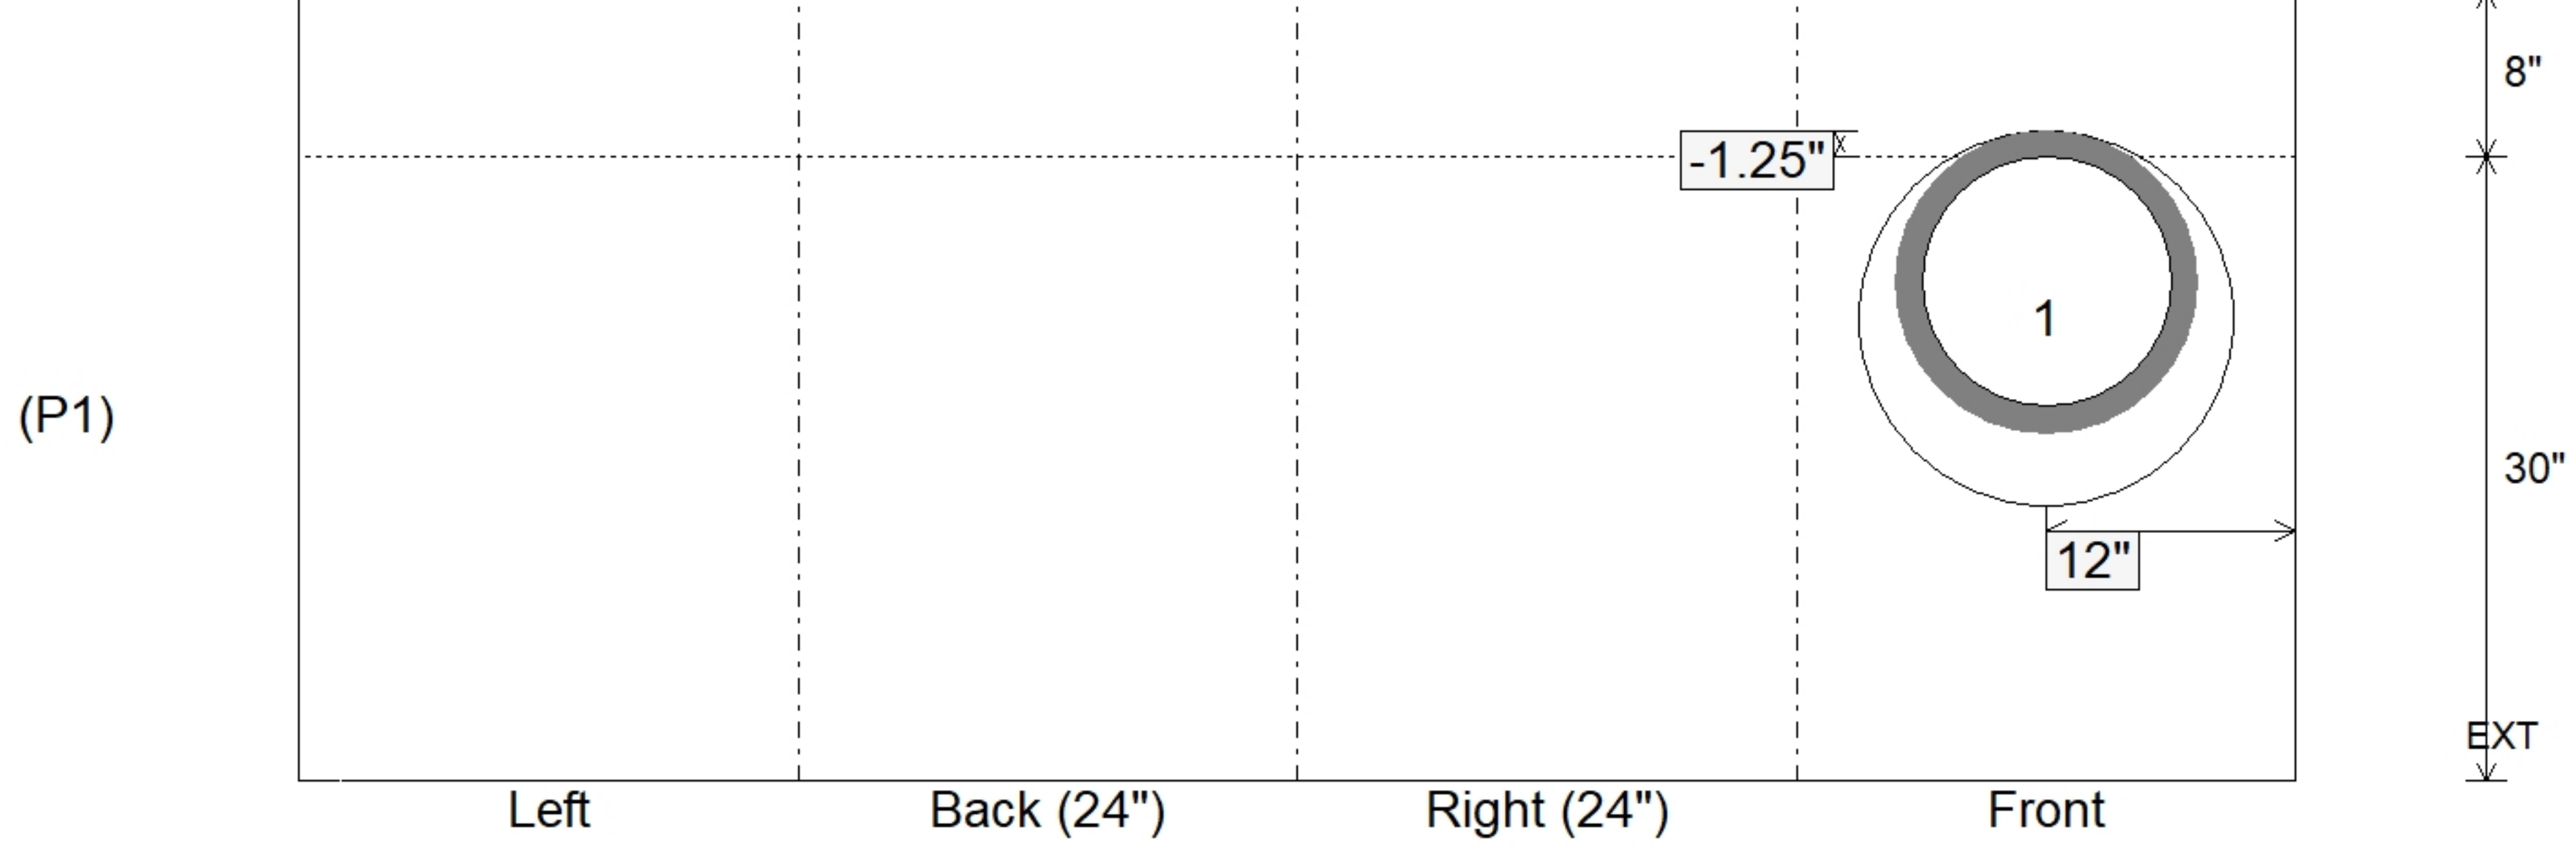

| | | | |
|----------------|-------------------------------|--|--|
| Coating (Int): | Seam Up: Flat Seam Dn: n/a | Wall Thickness: 8" Floor Height: 8" | Height (Int): 30" Height (Ext): 38" |
| Coating (Ext): | | | Weight (Net): 3481 lb Volume (Net): 0.89cu.yd |