

**Structure ID: CB2**

**P2 MH048RS24**

**MH RISER T/G**

P5) 30" x 30" - CASTING HEIGHT - 6" P4) 30" x 30" - GRADE RING F/F - 3" P3) 48" - MH FLAT TOP w/30"x30" Hole F/G - 12" P2) 48" - MH RISER T/G - 24" P1) 48" - MH BASE T/n - 60" 1) CASTING - JBS 3101V Single Set (F/G/H) 2) 48" - Conseal CS-102 1.00" 1) 30" x 30" - Conseal CS-102 1.00" 2) Hole - 22 7) MH Step ML-10-TDS-NCR - 10"	0 lb 218 lb 1350 lb 1677 lb 5192 lb 619 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 9056 lb
--	--



Structure Notes:  
 1. PER ASTM C478 SPECIFICATIONS.  
 2. CONCRETE = 4,000 PSI AT 28 DAYS.  
 3. CASTING BY OTHERS (JBS 3101-V F/G/H).

REINFORCING PER ASTM A615 (GRADE 60).  
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..  
 - RISER/WALLS (As .12)  
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 473.79' Rim to Invert: 8.57' Slack: 0.09" Sump: 2.25" Step Position: 266°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

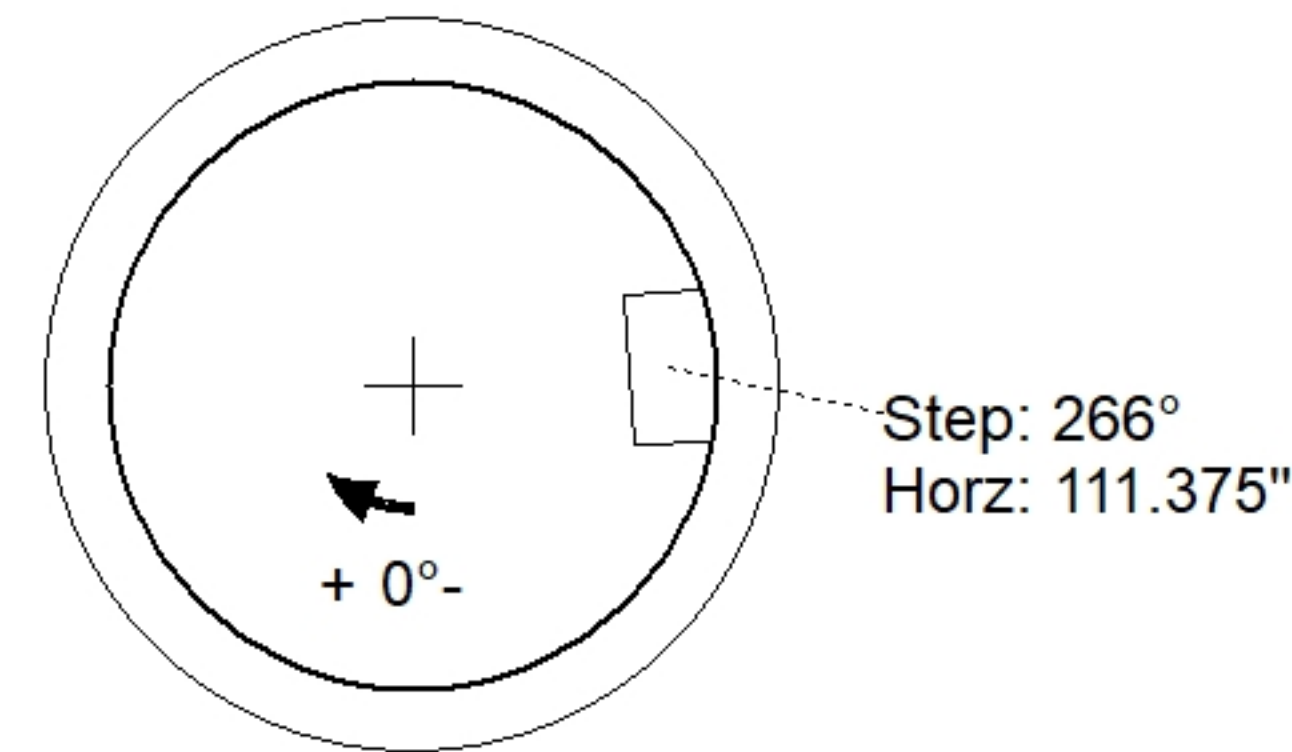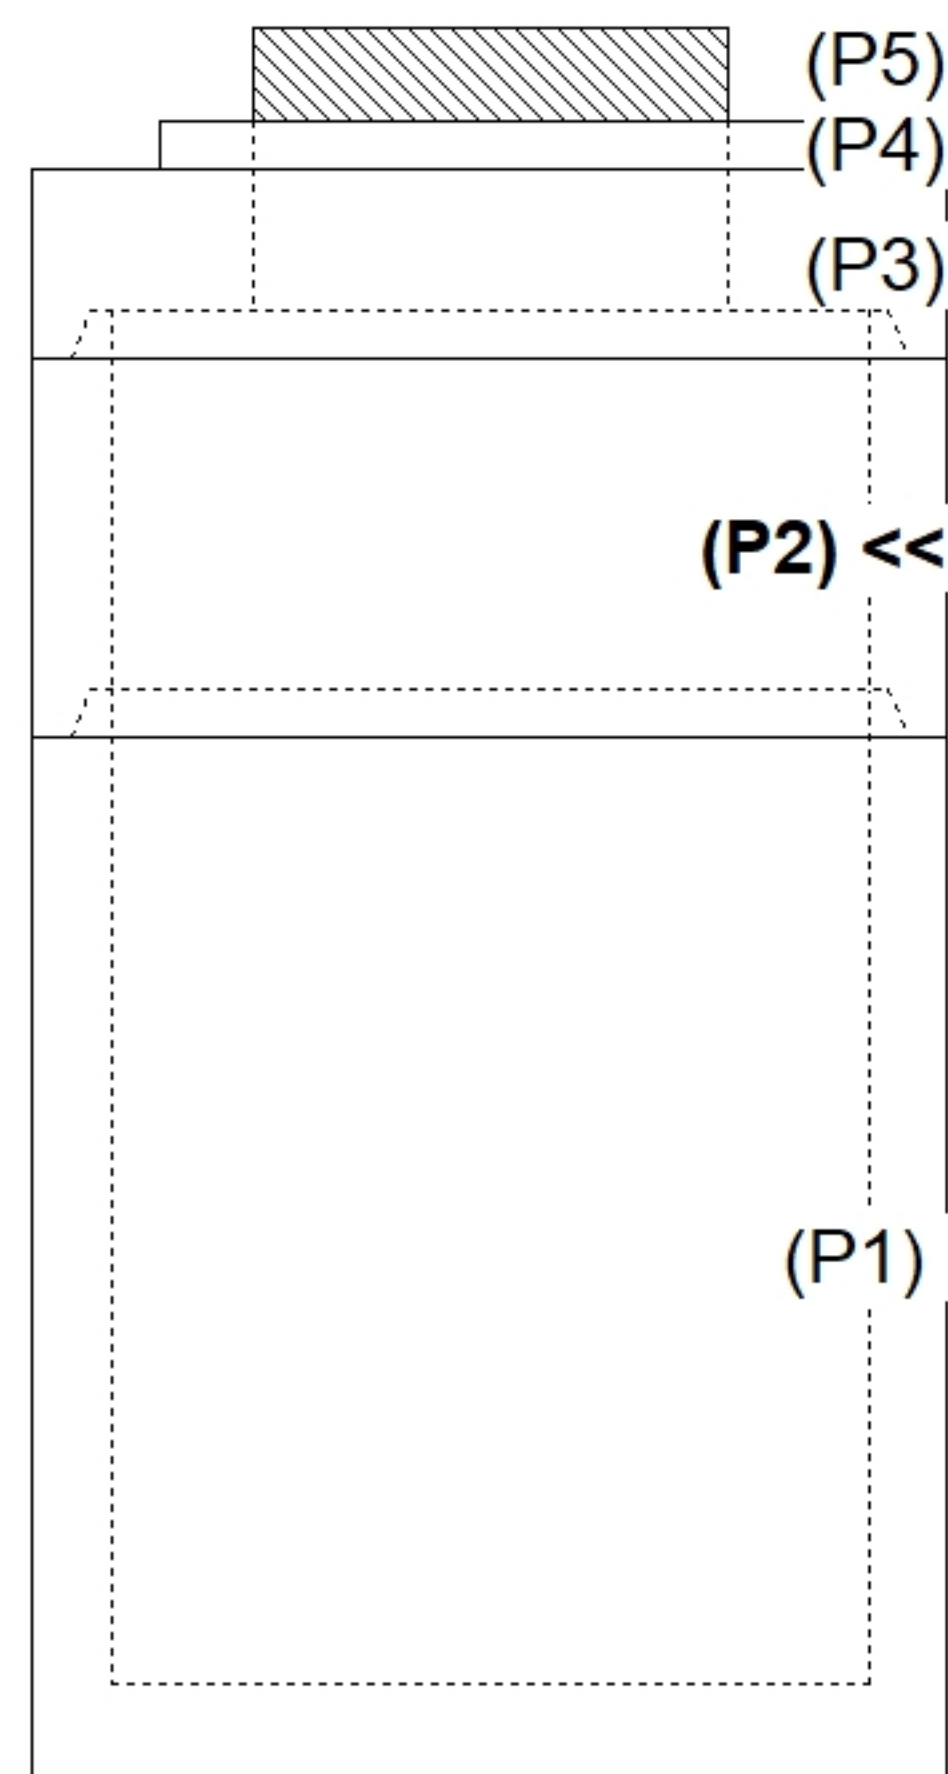

**INSIDE WALL DIMENSIONS**

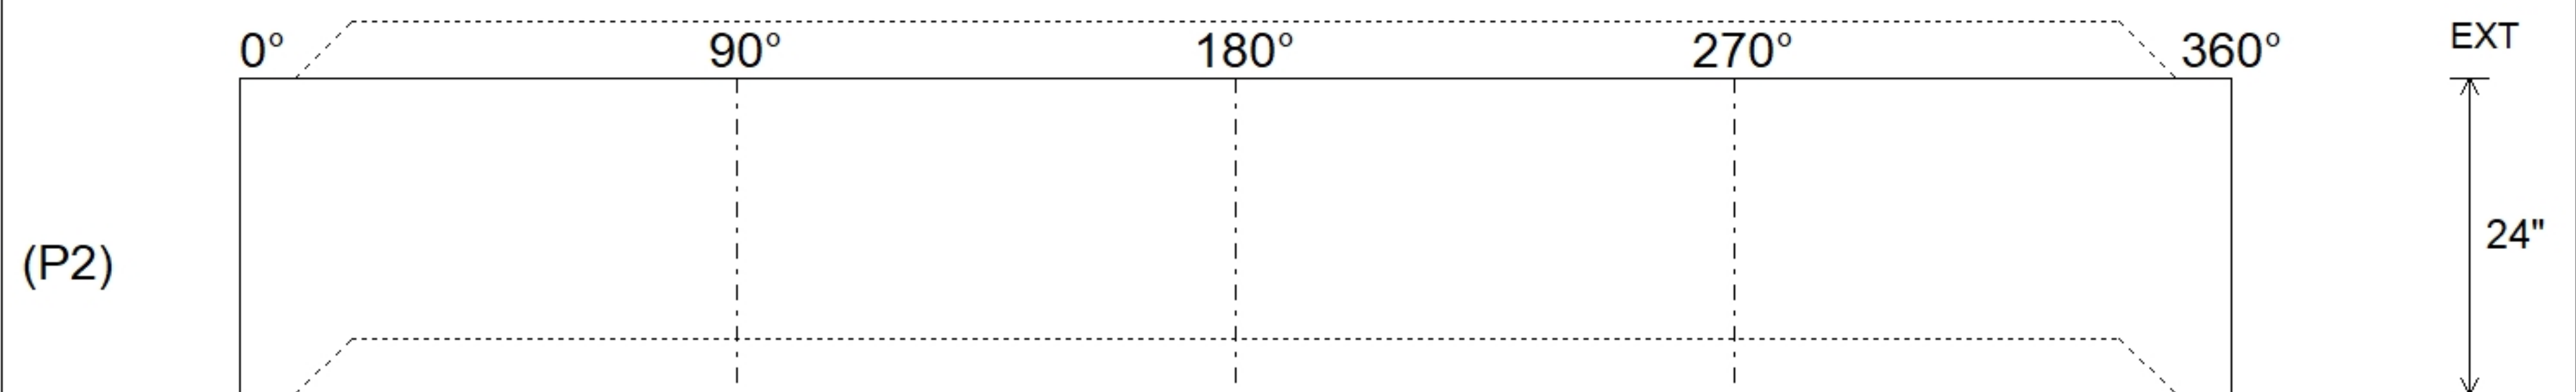

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 24" Height (Ext): 24"	Weight (Net): 1677 lb Volume (Net): 0.43cu.yd
----------------------------------	------------------------------------	--	--	--