



**Structure ID: MIT-L - MIT Modular Wall/Footing Left**

**P2 CVBS**

**32" x 240" MIT Section B - 32" x 240" MIT Section B - 32" x 234"**


- GENERAL NOTES:**
1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
  2. CONCRETE: 4,000 PSI AT 28 DAYS.
  3. REINFORCING: #5 BAR @ 12" C-C E.W. SEE REINFORCEMENT CUT SHEET FOR ADDITIONAL INFORMATION.
  4. 1/2" CHAMFER ON ALL EXPOSED EDGES.
  5. WEIGHT:
  6. **FIRST POUR - 7,250 LBS**  
**TOTAL - 11,099 LBS EACH**  
**48 TOTAL REQUIRED**

**SECOND POUR DRAWING**

1/2" CHAMFER ON ALL EXPOSED EDGES

**DETAIL A**


ADDITIONAL 3/6" X 3/6" "L" BAR IN CORNER @ 12" C-C (NOT SHOWN ON CUT SHEET)

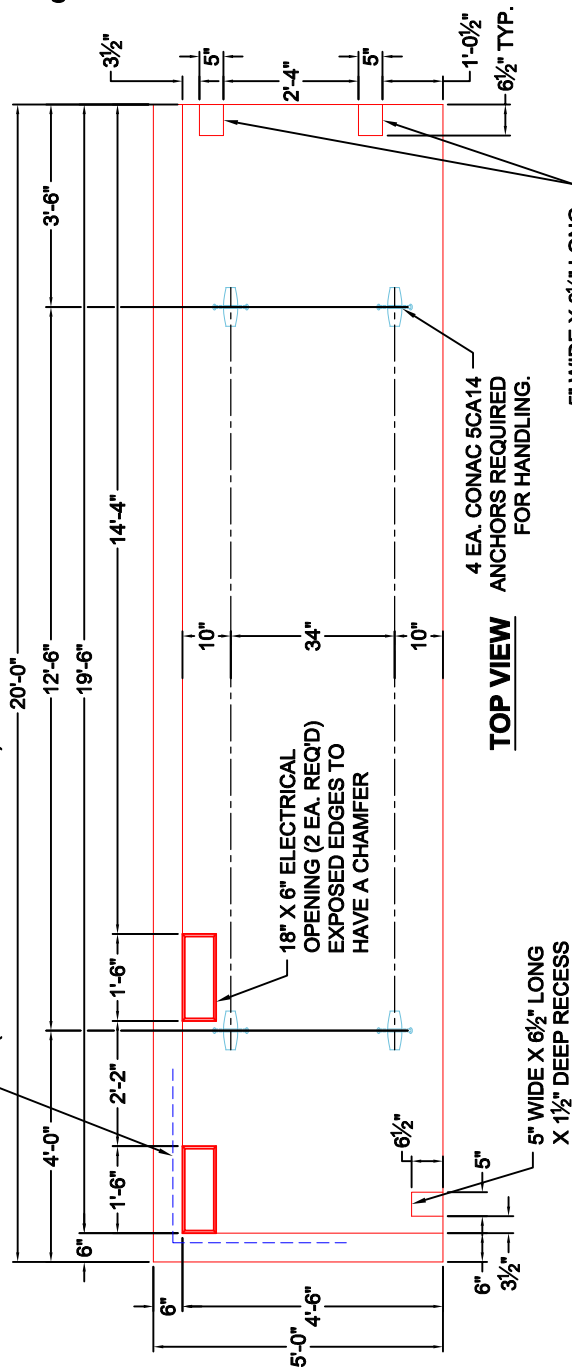


**TOP VIEW**

4 EA. CONAC 5CA14 ANCHORS REQUIRED FOR HANDLING.

5" WIDE X 6 1/2" LONG X 1 1/2" DEEP RECESS

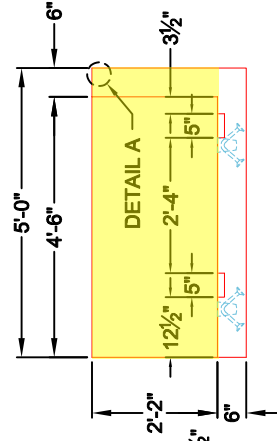

**END VIEW**

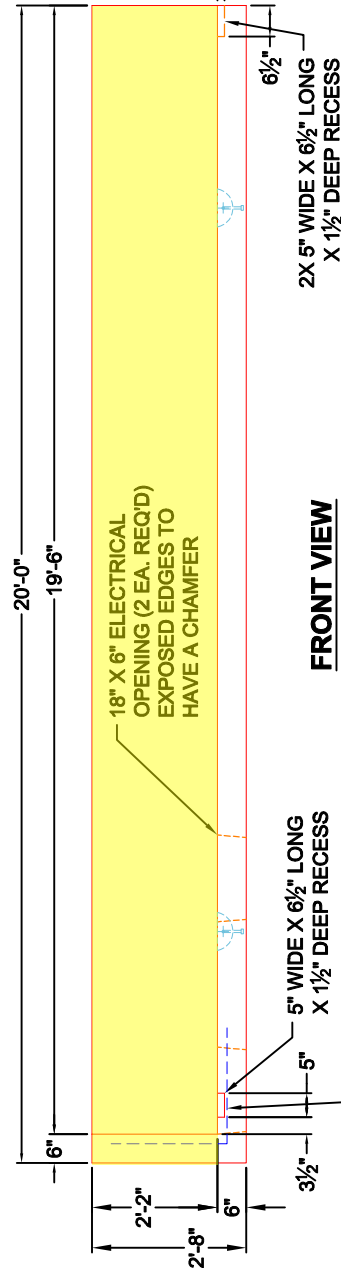

**FRONT VIEW**

18" X 6" ELECTRICAL OPENING (2 EA. REQ'D) EXPOSED EDGES TO HAVE A CHAMFER

5" WIDE X 6 1/2" LONG X 1 1/2" DEEP RECESS

ADDITIONAL 24" X 24" "L" BAR IN CORNER @ 12" C-C (NOT SHOWN ON CUT SHEET)

2X 5" WIDE X 6 1/2" LONG X 1 1/2" DEEP RECESS

