

Structure ID: CB 3

P1 MH048BAVF

MH BASE Custom Ht T/n

- | | | |
|--|---|--|
| P3) 18" x 36" - CASTING HEIGHT - 5.5"
P2) 48" - MH FLAT TOP w/18"x36" Hole F/G - 12"
P1) 48" - MH BASE Custom Ht T/n - 57"
1) 48" - Conseal CS-102 1.00"
1) 18" x 36" - Conseal CS-102 1.00"
2) Hole - 24
5) MH Step ML-10-TDS-NCR - 10" | 0 lb
2008 lb
4918 lb
0 lb
0 lb
0 lb
0 lb

0 lb | Structure Notes:
1. PER ASTM C-478 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: PER ASTM A615
4. STEPS AT 85 DEGREES
5. NO INVERT CHANNEL
6. CASTING SUPPLIED BY OTHERS (HOE 580-A FRAME & GRATE) |
|--|---|--|



Structure Total: 6926 lb

Rim: 947.75' Rim to Invert: 6.25' Slack: 0.5" Sump: 0" Step Position: 85


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (↓)	Offset
Invert 1	941.5'	0°	0"	18" HDPE	21.2"	Hole 24	24"	25.133"	-1.6"	0"
Invert 2	941.5'	225°	113.883"	18" HDPE	21.2"	Hole 24	24"	25.133"	-1.6"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

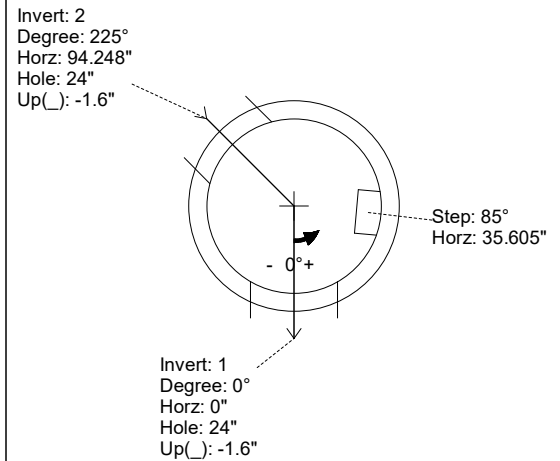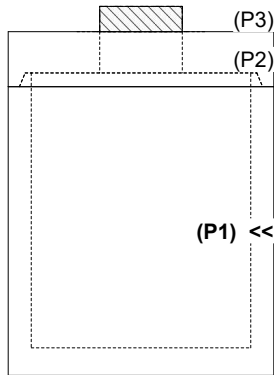

INSIDE WALL DIMENSIONS

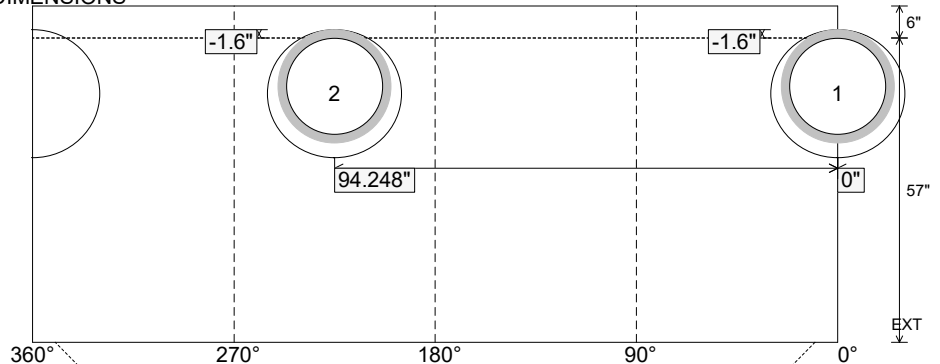

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 57" Height (Ext): 63"	Weight (Net): 4918 lb Volume (Net): 1.26cu.yd
----------------------------------	---------------------------------	--	--	--